

ECONOMIC COMMISSION FOR EUROPE

METHANE TO MARKETS PARTNERSHIP

Best Practice Guidance for Effective Methane Drainage and Use in Coal Mines

ECE ENERGY SERIES No.31



UNITED NATIONS

New York and Geneva, 2010

NOTE

The designations employed and the presentation of the material in this publication do not imply the expression of any opinion whatsoever on the part of the Secretariat of the United Nations concerning the legal status of any country, territory, city or area, or of its authorities, or concerning the delimitation of its frontiers or boundaries.

Mention of any firm, licensed process or commercial products does not imply endorsement by the United Nations.

UNITED NATIONS PUBLICATION
<i>Sales No. 10.II.E.2</i>
ISBN 978-92-1-117018-4
ISSN 1014-7225

Copyright © United Nations, 2010

All rights reserved worldwide

Foreword

Coal has been an important source of global primary energy production for the past two centuries, and the world will continue to depend on coal as an energy source for the foreseeable future. Methane (CH₄) released during coal mining creates unsafe working conditions in many underground mines around the world, with human fatalities an unacceptable consequence of many methane-related accidents. Effective gas management is not limited to safety concerns, however. Methane vented to the atmosphere, especially from drainage systems, is an energy resource lost forever. The resulting emissions also contribute to climate change. Fortunately, solutions for these challenges can go hand-in-hand using an effective, coordinated response.

Although respected technical literature on methane management is widely available for the mining professional, a single source of informed but accessible guidance for senior managers did not previously exist. The *Best Practice Guidance on Effective Methane Drainage and Use in Coal Mines* is intended to fill this crucial void. Recommended principles and standards on coal mine methane (CMM) capture and use are set out in a clear and succinct presentation to provide decision-makers with a solid base of understanding from which to direct policy and commercial decisions. We believe such knowledge is critical to achieve zero fatalities and explosion risk while minimising the environmental impact of CMM emissions. Change must start at the top.

The guidance document can also be used by students and even technical specialists as an introduction to key methane management principles and references. In fact, as part of this overall initiative, several organizations funded a reprint of the seminal *Firedamp Drainage Handbook*, a definitive technical reference first published by Verlag Glückauf for the Commission of the European Communities in 1980.

We wish to emphasize that the *Best Practice Guidance* does not replace or supersede national or international laws or other legally binding instruments. The principles outlined herein are intended to provide guidance to complement existing legal and regulatory frameworks and to support development of safer and more effective practices where industry practice and regulation continue to evolve.

The contributors to this project gave their time freely and willingly in the desire to promote increased safety in coal mining. In the light of recent accidents and in memory of all the fatalities of the past, the authors express the hope that their work will contribute to increasingly safer coal mining operations.

February 2010

United Nations Economic Commission for Europe
Methane to Markets Partnership

Table of Content

Foreword	3
Content	4
Acknowledgements.....	8
Acronyms and Abbreviations.....	10
Glossary of Terms.....	12
Executive Summary.....	14
Chapter 1. Introduction.....	20
Key Messages.....	20
1.1 Objectives of this Guidance Document	20
1.2 The Issues.....	21
1.3 Gas Capture, Utilisation, and Abatement	22
Chapter 2. Fundamentals of Gas Control.....	24
Key Messages.....	24
2.1 Objectives of Mine Gas Control	24
2.2 Occurrence of Gas Hazards.....	24
Ignition of Explosive Methane Mixtures.....	26
2.3 Reducing Explosion Risk.....	26
2.4 Regulatory and Management Principles.....	28
Effective Safety Regulatory Framework.....	28
Enforcement	28
Permissible Gas Concentrations for Safe Working Conditions	29
Safe Transport and Utilisation of Gas	30
Regulations to Reduce Ignition Risk.....	30
Chapter 3. Occurrence, Release, and Prediction of Gas Emissions in Coal Mines.....	31

Key Messages	31
3.1 Introduction	31
3.2 Occurrence of Gas in Coal Seams.....	31
3.3 The Gas Release Process	32
3.4 Relative Gassiness of Coal Mines	33
3.5 Understanding Gas Emission Characteristics of Coal Mines.....	33
3.6 Measurement of the In Situ Gas Content of Coal	34
3.7 Practical Estimation of Gas Flows in Coal Mines	35
Chapter 4. Mine Ventilation.....	37
Key Messages	37
4.1 Ventilation Challenges	37
4.2 Key Ventilation Design Features	38
4.3 Ventilation of Gassy Working Faces.....	38
4.4 Ventilation System Power Requirement.....	41
4.5 Ventilation of Coal Headings.....	42
4.6 Ventilation Monitoring	42
4.7 Ventilation Control.....	42
Chapter 5. Methane Drainage.....	44
Key Messages	44
5.1 Methane Drainage and Its Challenges	44
5.2 Basic Principles of Methane Drainage Practices Employed Worldwide	44
5.3 Pre-Drainage Basics.....	45
5.4 Post-Drainage Basics.....	46
5.5 Design Considerations for Methane Drainage Systems.....	48
5.6 Underground Gas Pipeline Infrastructure.....	49

5.7 Monitoring of Gas Drainage Systems.....	50
Chapter 6. Methane Utilisation and Abatement	51
Key Messages.....	51
6.1 Coal Mine Methane and Climate Change Mitigation	51
6.2 Mine Methane as an Energy Resource	51
6.3 Use Options.....	52
6.4 Abatement and Utilisation of Drained Methane	54
6.4.1 <i>Medium- to High-Methane Concentration CMM</i>	54
6.4.2 <i>Low-Concentration Drained Methane</i>	55
6.4.3 <i>Purification Technologies for Dilute Methane from Drainage Systems</i>	55
6.4.4 <i>Flaring</i>	56
6.5 Abatement or Utilisation of Low-Concentration Ventilation Air Methane (VAM)	57
6.6 Methane Monitoring.....	58
Chapter 7. Cost and Economic Issues	59
Key Message	59
7.1 The Business Case for Methane Drainage	59
7.2 Comparative Costs of Methane Drainage.....	59
7.3 Methane Utilisation Economics	61
7.4 Carbon Financing and Other Incentives.....	63
7.5 Opportunity Cost of Utilisation	65
7.6 Environmental Costs	66
Chapter 8. Conclusions and Summary for Policymakers	67
Chapter 9. Case Studies	69
Case Study 1: Achieving Planned Coal Production from a Gassy, Retreat Longwall with Severe Strata Stress and a Spontaneous Combustion Prone Coal Seam – United Kingdom	70
Case Study 2: High Performance Longwall Operations in Areas with High Gas Emissions – Germany ..	73

Case Study 3: High Performance Longwall Operations in Areas with High Gas Emissions – Australia .. 75

Case Study 4: Reducing Explosion Risk in Room-and-Pillar Mines – South Africa 77

Case Study 5: Development of a CMM Power Co-Generation/Emission Abatement Scheme – China.. 79

Case Study 6: VAM – China 80

Case Study 7: VAM – Australia 82

Appendix 1. Comparisons of Gas Drainage Methods (adapted from Creedy, 2001)..... 84

References 89

Additional Resources 91

Acknowledgements

Sponsoring Organizations

The **United Nations Economic Commission for Europe** (UNECE) is one of the five UN Regional Commissions and provides a forum through which 56 countries of North America and Western, Central, and Eastern Europe as well as Central Asia come together to forge the tools of their economic cooperation. The main areas of UNECE's activity are: economic cooperation, environment and human settlements, statistics, sustainable energy, trade, industry and enterprise development, timber, and transport. UNECE pursues its goals through policy analysis, the development of conventions, regulations and standards, and the provision of technical assistance. www.unece.org/energy/se/cmm.html

The **Methane to Markets Partnership** (M2M) is an international public-private partnership with 30 Partner countries, plus the European Commission, established in 2004 and focused on promoting cost-effective methane emission reductions through recovery and use from four key methane sectors: coal mining, landfills, oil and gas systems, and agriculture. The Coal Subcommittee has brought together key experts in coal mine methane recovery and utilisation to share information about state-of-the-art technologies and practices through a number of workshops, trainings, study tours, and capacity-building initiatives. www.methanetomarkets.org

Structure

This document was conceived by a *Steering Committee*, who provided direction and overall vision, and drafted by a *Technical Experts Panel*, consisting of five globally renowned experts in underground ventilation and methane drainage at coal mines. The draft document was first reviewed by a *Stakeholders Advisory Group* to ensure that messages were clear and effective for senior decision-makers, before undergoing a formal technical peer review process.

Executive Steering Committee

- Pamela Franklin, Co-chair, M2M Coal Subcommittee
- Roland Mader, Vice Chairman, UNECE Ad Hoc Group of Experts on Coal Mine Methane
- Raymond C. Pilcher, Chairman, UNECE Ad Hoc Group of Experts on Coal Mine Methane
- Carlotta Segre, Secretary, UNECE Ad Hoc Group of Experts on Coal Mine Methane
- Clark Talkington, Former Secretary, UNECE Ad Hoc Group of Experts on Coal Mine Methane

Technical Experts Drafting Group

- Bharathe Belle, Anglo American
- David Creedy, Sindicatum Carbon Capital Ltd.
- Erwin Kunz, DMT GmbH & Co. KG
- Mike Pitts, Green Gas International
- Hilmar von Schoenfeldt, HVS Consulting

Stakeholder Advisory Group

- Yuriy Bobrov, Association of Donbass Mining Towns (Ukraine)
- Graeme Hancock, World Bank
- Martin Hahn, International Labour Organization
- Hu Yuhong, State Administration for Worker Safety (China)
- Sergei Shumkov, Ministry of Energy (Russian Federation)
- Ashok Singh, Central Mine Planning & Design Institute (India)

Technical Peer Group

- John Karas, Commonwealth Scientific and Industrial Research Organisation (Australia)
- Hua Guo, Commonwealth Scientific and Industrial Research Organisation (Australia)
- Li Guojun, Tiefa Coal Industry Ltd. (China)
- Guy Pierce Jones, Trolex Ltd. (UK)
- B.N. Prasad, Central Mine Planning & Design Institute (India)
- Ralph Schlueter, DMT GmbH & Co. KG (Germany)
- Karl Schultz, Green Gas International (UK)
- Jacek Skiba, Central Mining Institute of Katowice (Poland)
- Trevor Stay, Anglo American Metallurgical Coal (Australia)
- Oleg Tailakov, International Coal and Methane Research Center, Uglemetan (Russian Federation)

In addition to those listed above, the sponsoring organizations wish to express their gratitude to Luke Warren, who played an integral role in the initial stages of this project.

Acronyms and Abbreviations

CBM	Coalbed Methane
CDM	Clean Development Mechanism
CERs	Certified Emission Reductions
CFRR	Catalytic Flow Reversal Reactors
CH ₄	Methane
CMM	Coal Mine Methane
CMR	Catalytic Monolith Reactor
CNG	Compressed Natural Gas
CO ₂	Carbon Dioxide
CO ₂ e	Carbon Dioxide Equivalent
ERPA	Emission Reduction Purchase Agreement
ERUs	Emission Reduction Units
ESMAP	Energy Sector Management Assistance Program
GHG	Greenhouse Gas
GWP	Global Warming Potential
IBRD	International Bank for Reconstruction and Development
IC	Internal Combustion
I&M	Inspection and Maintenance
JI	Joint Implementation
kWh	Kilowatt-hour
LNG	Liquefied Natural Gas
l/s	Litres per Second
m	Metre

m/s	Metres per Second
m ³ /d	Cubic Metres per Day
m ³ /s	Cubic Metres per Second
mD	Millidarcy (in common usage, equivalent to approximately 10 ⁻³ (μm) ²)
MRD	Medium Radius Drilling
MSA	Molecular Sieve Adsorption
Mt	Million (10 ⁶) tonnes
Mtpa	Million Tonnes per Annum
MW _e	Megawatt of Electricity Capacity
Nm ³	Normal Cubic Metres
PSA	Pressure Swing Adsorption
scfm	Standard Cubic Feet per Minute
t	Tonne (metric)
t/d	Tonnes per Day
TFRR	Thermal Flow Reversal Reactor
TRD	Tight Radius Drilling
UNECE	United Nations Economic Commission for Europe
UNFCCC	United Nations Framework Convention on Climate Change
VAM	Ventilation Air Methane
VERs	Verified Emission Reductions
USBM	United States Bureau of Mines

Glossary of Terms

Within the coal and mine gas industry, there is still confusion over terms and abbreviations used within and across different jurisdictions. In addition to the terms listed here, the UNECE has prepared a *Glossary of Coal Mine Methane Terms and Definitions* that is more comprehensive and highlights how terminology is used in different regions (www.unece.org/energy/se/pdfs/cmm/cmm4/ECE.ENERGY.GE.4.2008.3_e.pdf).

Air lock – an arrangement of doors that allows passage from one part of a mine ventilation circuit to another without causing a short-circuit.

Auxiliary ventilation – proportion of main ventilating current directed to the face of a blind heading (i.e., entry) by means of an auxiliary fan and ducting.

Back-return – a temporary ventilation arrangement formed at the return end of a U-ventilated longwall to divert a proportion of the air behind the face to allow access for gas drainage drilling and prevent high concentration goaf gases encroaching on the face end.

Bleeder shaft – a vertical shaft through which gas-laden air from working districts is discharged.

Blind heading – a development roadway with a single entry that requires auxiliary ventilation.

Bord-and-pillar (room-and-pillar) – a method of mining in which coal is extracted from a series of headings, which are then interlinked leaving un-mined coal pillars to support the roof.

Capture (drainage) efficiency – the proportion of methane (by volume) captured in a methane drainage system relative to the total quantity of gas liberated. Gas liberated comprises the sum of drained gas plus gas emitted into the mine ventilation air. Usually expressed as a percentage, capture (or drainage) efficiency can be determined for a single longwall panel or for a whole mine.

Coal front gas – gas released from the working seam coalface by the action of the coal-cutting machine.

Coalbed methane (CBM) – a generic term for the methane-rich gas naturally occurring in coal seams typically comprising 80% to 95% methane with lower proportions of ethane, propane, nitrogen, and carbon dioxide. In common international use, this term refers to methane recovered from un-mined coal seams using surface boreholes.

Coal mine methane (CMM) – gas captured at a working coal mine by underground methane drainage techniques. The gas consists of a mixture of methane and other hydrocarbons and water vapour. It is often diluted with air and associated oxidation products due to unavoidable leakage of air into the gas drainage boreholes or galleries through mining induced fractures and also due to air leakage at imperfect joints in underground pipeline systems. Any gas captured underground, whether drained in advance of or after mining, and any gas drained from surface goaf wells is included in this definition. Pre-mining drained CMM can be of high purity.

Extraneous gas – gas emissions other than coal front gas.

Firedamp – alternative term for CMM.

Gas drainage – methods for capturing the naturally occurring gas in coal seams to prevent it entering mine airways. The gas can be removed from coal seams in advance of mining using pre-drainage techniques and from coal seams disturbed by the extraction process using post-drainage techniques. Often referred to as **Methane drainage** if methane is the main gas component target to be captured.

Goaf (United States: gob) – broken, permeable ground where coal has been extracted by longwall coal mining and the roof has been allowed to collapse, thus fracturing and de-stressing strata above and, to a lesser extent, below the seam being worked. The term gob is generally used in the United States; elsewhere, goaf is generally used.

Methane drainage – See **Gas drainage**.

Natural gas – typically refers to gas extracted from geological strata other than coal seams (i.e., from “conventional” gas reserves). The gas could be composed mostly of methane and may have originally migrated from coal seam sources.

Pre-drainage (pre-mine drainage) – extraction of gas from coal ahead of mining.

Post-drainage (post-mine drainage) – extraction of gas released as a consequence of mining.

Respirable dust – microscopic particles of dust which can enter and damage the human lung.

Ventilation air methane (VAM) – methane emitted from coal seams that enters the ventilation air and is exhausted from the ventilation shaft at a low concentration, typically in the range of 0.1% to 1.0% by volume.

Executive Summary

The world has relied upon coal for a significant portion of its primary energy production since the Industrial Revolution. The world's major industrialised, emerging, and transitional economies—and hence, the global economy—will be dependent on coal energy resources for the foreseeable future. Today, coal supplies 25% of global primary energy, 40% of global electricity, and almost 70% of the world's steel and aluminum industry. The International Energy Agency (IEA) projects that emerging economies will see energy demand grow 93% by 2030, driven largely by demand growth in China and India, and coal is expected to be the leading fuel to meet this growing demand (IEA, 2009).

With the continued dependence on coal production, coal extraction is expected to become increasingly challenging in many parts of the world as shallow reserves are exhausted and deeper and more gassy seams are mined. Yet societies are demanding and expecting safer mine working conditions, and greater environmental stewardship from the coal industry. The application of best practices for methane drainage and use is critical to reduce methane-related accidents and explosions that all too often accompany coal mining, while also contributing to environmental protection through reduction of greenhouse gas (GHG) emissions.

Coal Mine Methane Poses Safety and Environmental Challenges

The global coal industry, national governments, trade unions, and worker safety advocates are concerned that the frequency and severity of methane explosions, especially in emerging economies, are unacceptably high. Good mining practices need to be transferred to all countries to ensure that risks are managed professionally and effectively. No mine, even in the most developed countries, is free from safety risks. Regardless of location or mining conditions, it is possible to significantly reduce the risk of methane accidents.

Methane is an explosive gas in the range of 5% to 15% methane in air. Its transport, collection, or use within this range, or indeed within a factor of safety of at least 2.5 times the lower explosive limit and at least two times the upper limit, is generally considered unacceptable because of the inherent explosion risks.

Effective management of methane risks at coal mines can also have the benefit of contributing to reduced or minimised GHG emissions. Coal mines are a significant emissions source of methane, a potent GHG with a global warming potential (GWP) of more than 20 times that of carbon dioxide (IPCC, 2007). Methane totals 14% of global anthropogenic GHG emissions and coal mines release 6% of global anthropogenic methane emissions, or about 400 million tonnes of carbon dioxide equivalent (MtCO₂e) per year. CMM emissions are projected to increase through 2020 (Methane to Markets, 2008; IPCC, 2007; EPA, 2006a), with estimates as high as 793 MtCO₂e by 2020 (ESMAP, 2007).

Methane Occurrence and Control

Methane-rich gases, generally containing 80% to 95% methane at underground mining depths, occur naturally in coal seams and are released as CMM when coal seams are disturbed by mining activities. CMM only becomes flammable and creates an explosion hazard when allowed to mix with air.

Emissions of large volumes of carbon dioxide also occur from coal mines in some geologic environments (e.g., Australia, South Africa, France, and Central Europe). This coal seam carbon dioxide can have important implications for overall mine degasification management strategies.

Good safety practice in coal mines is to reduce explosion risk by preventing the occurrence of explosive mixtures where practical, and by rapidly diluting them to safe concentrations (i.e., through ventilation systems). Where gas flows are so high that they exceed the capacity of the mine ventilation system to ensure adequate dilution of methane in the mine air, gas should be collected through a mine drainage system before it can enter the mine airways.

Good practice for mine methane drainage systems means both selection of a suitable gas capture method and proper implementation and execution of the mine drainage system. Following good practice will ensure that CMM can be safely captured, transported, and (if appropriate) utilised, at a concentration at least twice that of the upper explosive limit (i.e., at or over 30% methane).

Regulatory Approaches to Methane Control

A risk assessment approach to minimising explosion risks—combined with strong enforcement of robust ventilation and utilisation safety regulations—can lead to substantially improved quantities and qualities of captured gas.

Furthermore, establishment and enforcement of safety regulations governing gas extraction, transport, and utilisation will encourage higher methane drainage standards, increased clean energy production, and greater emission reductions.

Prediction of Underground Methane Releases

Gas flows into underground coal mines under normal, steady-state conditions are relatively predictable in certain geological and mining conditions, although there is significant variation from country to country. Lack of reliable gas emission prediction methods for deep- and multiple-seam mining continues to be a significant challenge due to the complex mining-induced interactions between strata, groundwater, and gas. Nonetheless, proven methods for projecting gas flows, gas capture, ventilation requirements, and utilisation potential are widely available and should be used routinely in mine planning.

By their very nature, unusual emission and outburst events are not easily predicted, but the conditions under which they can occur are reasonably well known. Therefore, following good practice allows for more effective management of these risks.

Any mining activity can sometimes disturb adjacent natural gas reservoirs, leading to unwanted methane releases that can be as much as twice those expected from coal seam sources alone. Such situations can be identified at an early stage by comparing measured and predicted data.

The Role of Ventilation Systems

The maximum rate of coal extraction that can be safely achieved on a gassy working coalface is determined primarily by the combination of two factors: 1) the mine ventilation system's capacity to dilute

gaseous pollutants to acceptable concentrations, and 2) the efficiency of the mine’s methane drainage system.

Operating costs are a key driver in designing the overall mine degasification scheme. The power consumed in providing underground mine ventilation is among the most costly operational expenses at a mine; it is proportional to the airflow volume cubed. Therefore, introducing a gas drainage system—or increasing its effectiveness—often represents a lower-cost option than increasing ventilation air volumes.

Methane Drainage

The purpose of methane drainage is to capture gas at high purity from its source before it can enter the mine airways. From a strictly regulatory perspective, only enough gas needs to be captured to ensure that the capacity of the ventilation air to dilute gaseous pollutants is not exceeded. However, there is a strong case for maximising gas capture to achieve enhanced safety, environmental mitigation, and energy recovery.

Methane can be captured before and after mining by pre- and post-drainage techniques, respectively. Pre-drainage is the only means of reducing gas flow directly from the mined seam. For this reason, pre-drainage is especially important if the seam being extracted is the main gas emission source, but it is generally only feasible in seams of medium- to high-permeability. Post-drainage methods involve intercepting methane that has been released by mining disturbance before it can enter a mine airway. Post-drainage techniques all involve accessing the zone of disturbance above—and also sometimes below—the worked coal seam. Post-drainage may involve drilling from the surface or from underground.

Low capture efficiencies of the drainage system and excessive ingress of air to the mine workings result from the selection of unsuitable gas drainage methods and from the poor implementation of these methods. These, in turn, negatively affect both gas transport and utilisation by producing gas concentrations sometimes at levels that are not considered safe (e.g., below 30% methane).

The performance of methane drainage systems can be significantly improved through a combination of proper installation and maintenance, regular monitoring, and systematic drilling.


There is a strong business case for installing and operating high-efficiency methane gas drainage systems. Successful methane control is a key factor in achieving profitability of gassy underground coal mines.

Based on experiences in coal mines worldwide, investment in “good practice” gas drainage systems results in less downtime from gas emission problems, safer mining environments, and the opportunity to utilise more gas and reduce emissions.

Methane Utilisation and Abatement

Captured CMM is a clean energy resource for which there are a variety of uses. Figure ES-1 summarizes the distribution of known CMM projects globally that are operating, under development, planned, or were operating previously. These figures are based on a database of more than 240 projects globally, compiled by the Methane to Markets Partnership. As the figure indicates, power generation, natural gas pipeline injection, and boilers are the dominant project types (based on number of projects).

Figure ES-1 Distribution of CMM Uses in Global Projects. This figure represents the total number of CMM projects reported to Methane to Markets that are active or under development globally, based on type of end use.

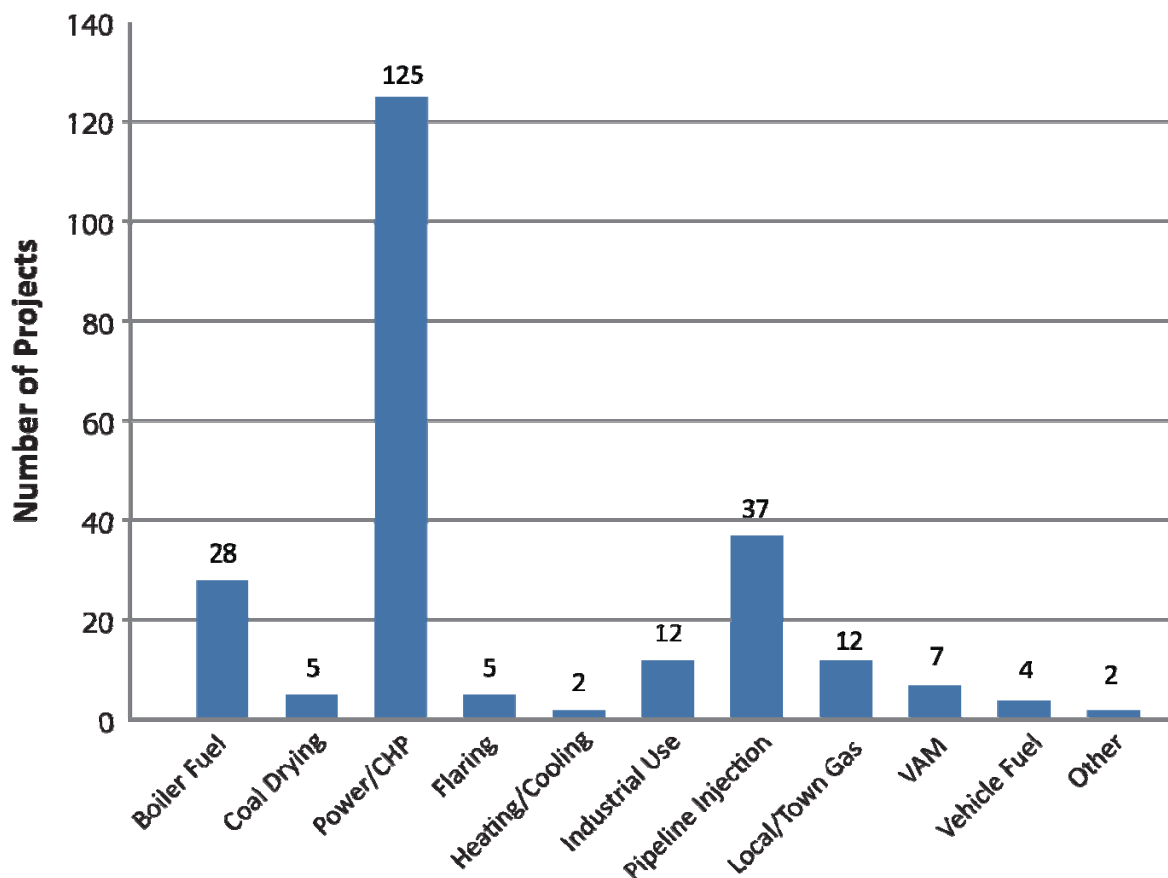

(Source: Methane to Markets Partnership, 2009)

Purification technologies have been developed and are extensively used (e.g., in the United States) to remove any contaminants from high-quality CMM—typically produced from pre-drainage—to meet stringent pipeline-quality standards (EPA, 2009). For many other gas end-use applications, the high costs associated with purifying drained gas may be unnecessary and can be avoided by improving underground methane drainage standards.

With the proper equipment and procedures, unused drained gas can be safely flared to minimise GHG emissions. Flaring converts methane, which has a GWP of more than 20 compared to carbon dioxide, which has a GWP of one (IPCC, 2007).

Methane that is not captured by the drainage system is diluted in the mine ventilation air and is emitted to the atmosphere as dilute ventilation air methane (VAM), typically at concentrations of 1% or less methane. Despite this low concentration, collectively VAM is the single largest source of mine methane emissions globally. Thermal oxidation technologies have been introduced at demonstration and commercial scales at several sites globally (e.g., Australia, China, and the United States) to abate these emissions (and in one

case, to produce electricity from the dilute methane). Other technologies to mitigate VAM emissions (e.g., catalytic oxidation) are emerging and under development.

Cost and Economic Issues

Effective gas drainage reduces the risks of explosions, and hence accident risks. Reducing these risks in turn reduces their associated costs. Costs of methane-related accidents vary widely from country to country but are significant. For example, a 10% work stoppage or idling at a given mine due to a gas-related incident or accident could lead to US \$8 million to US \$16 million per year in lost revenues at a typical high-production longwall mine. Additional costs of a single fatal accident to a large mining operation could range from US \$2 million to more than US \$8 million through lost production, legal costs, compensation, and punitive fines.

At the same time, gas drainage creates an opportunity for gas recovery and utilisation. Such energy-recovery projects can be economical in their own right through sale of the gas or its conversion to electricity, vehicle fuel, or other valuable gas feed stocks.

Gas recovery and utilisation projects are increasingly also including revenue streams from carbon emission reduction credits in the form of Verified Emission Reductions (VERs), Certified Emission Reductions (CERs), or other credits such as emission reduction units (ERUs). These potential carbon financing options may be a critical factor in making some CMM utilisation projects economically viable that would be otherwise financially unattractive. In addition, carbon financing may provide the only revenue streams for abatement-only projects, such as VAM oxidation (without energy recovery) or CMM flaring.

VAM can also be used for power generation. At this time, VAM-derived power generation is not commercially feasible without carbon revenues or other incentives, such as preferential electricity pricing or portfolio standards.

Currently, investment decisions at most mines are likely to favour expansion in coal production rather than developing CMM utilisation projects (particularly power generation) due to the high opportunity cost of investing in power generation capital equipment and infrastructure. To meet environmental protection targets in the future, however, mine owners may be required to improve gas drainage performance beyond the level strictly required to meet the mines' safety needs. Such improvements in the drainage system that yield relatively high-quality gas may provide an additional incentive for investment in gas recovery and utilisation projects.

Conclusions

A holistic approach to managing methane releases into coal mine workings and subsequent emissions into the atmosphere will have a number of beneficial impacts on overall mine safety, mine productivity, and environmental impacts, particularly with regard to GHG emissions.

- Global application of the accumulated knowledge on methane occurrence, prediction, control, and management that is currently available will improve mine safety. Implementation of good

practices for methane drainage could substantially reduce explosion risks resulting from methane in coal mines.

- There is a strong business case for installing and operating high-efficiency gas drainage systems based on their contributions to increased mine productivity. Because such systems will increase the availability of good-quality CMM, there can also be a strong business case for exploiting and recovering energy from the captured gas.
- Emissions of methane, an important GHG, from underground coal mines can be significantly reduced by utilising the drained gas, flaring the gas that cannot be used, and mitigating VAM emissions by oxidation.

Chapter 1. Introduction

Key Messages

Regardless of constraints, mine worker safety is paramount and should not be compromised.

A risk assessment approach to minimising explosion risks should be combined with strong enforcement of robust ventilation and utilisation safety regulations.

Ideally, modern coal mining companies recognise the benefits of adopting a holistic gas management system that constructively integrates underground gas control, methane utilisation, and reductions in greenhouse gas (GHG) emissions.

1.1 Objectives of this Guidance Document

This document aims to provide guidance to mine owners and operators, government regulators, and policymakers in the design and implementation of safe, effective methane capture and control in underground coal mines. It is intended primarily to encourage safer mining practices to reduce fatalities, injuries, and property losses associated with methane.

An important co-benefit of effective methane drainage at coal mines is to allow for the recovery of methane to optimise the use of otherwise-wasted energy resources. Thus, an important motivation behind the development of this guidance document is to facilitate and encourage the utilisation and abatement of coal mine methane (CMM) to reduce GHG emissions. Ultimately, adoption of these practices will help to enhance the sustainability and long-term financial position of coal mines globally by:

- Striving to achieve a goal of zero fatalities, injuries, and property losses.
- Demonstrating the global coal industry's commitment to mine safety, climate change mitigation, corporate social responsibility, and good citizenship.
- Establishing a global dialogue on CMM capture and use.
- Creating critical linkages among coal industry, government, and regulatory officials.
- Incorporating effective CMM capture as a part of an effective risk management portfolio.

This guidance document is intentionally “principles-based.” That is, it does not attempt to present a comprehensive, prescriptive approach that may not adequately account for site-specific conditions, geology, and mining practices. The authors recognize there is no universal solution and therefore, have established a broad set of principles that can be adapted as appropriate to individual circumstances. In general, the technologies for implementing these principles continue to evolve and improve over time. International industry best practices are outlined in this document as appropriate.

This document is not intended to serve as a comprehensive, detailed technical methane drainage manual. References and additional resources are provided at the end of this document.

1.2 The Issues

Coal is an essential energy resource in both industrialised countries and emerging economies. Meeting the voracious energy demand, particularly in some rapidly-growing economies, has placed pressure on coal mines to increase their production—sometimes to levels beyond what can be safely sustained, leading to stresses on overall mining operations and compromising safety. The presence of methane in coal mines presents a serious safety concern that needs to be managed professionally and effectively. While methane explosions in underground coal mines are very rare occurrences in many coal mining countries, they still cause thousands of mine fatalities and injuries every year.

Many deaths can result from a single incident. Table 1.1 shows some of the most serious fatal coal mine explosions that have occurred in several countries since 2000. With effective management of mine methane, such tragedies can be eliminated.

Table 1.1 Major Coal Mine Explosion Incidents, Post-2000

Country	Date	Coal Mine	Number of Fatalities
China	14 February 2005	Sunjiawan, Haizhou shaft, Fuxin	214
Kazakhstan	20 September 2006	Lenina, Karaganda	43
Russia	19 March 2007	Ulyanovskaya, Kemerovo	108
Ukraine	19 November 2007	Zasyadko, Donetzk	80
USA	2 June 2006	Sago, West Virginia	12

Accidents can occur when methane enters the mine space from the coal seam and surrounding strata as a result of the disturbance created by the mining operation. The amount of gas released into the mine is a function of both the rate of coal extraction and the in situ gas content of the coal and surrounding strata.

National regulatory agencies set maximum limits for the methane concentration in underground airways. Thus, methane releases into the mine workings can be a limiting factor for coal production.

Guidance is urgently needed to help governments swiftly implement safer working practices to reduce the hazard posed by methane in underground coal mines. Based on available data, there is a large range in the fatality rate of underground coal mining in different countries around the world. For instance, the rate of fatalities per million tonnes coal mined may differ by a factor of more than 30 times from one country to another.¹

¹ Based on 2008 data (official statistics) for underground coal mining fatalities in China and the United States. In 2008, China reported 3,215 fatalities per 2,565 billion tonnes of underground coal mined (assuming 95% of the total reported 2.7 billion tonnes is from underground coal mined), for 1.25 fatalities per million tonnes underground coal

No coal mine is free from safety risks. Gas-related incidents can occur in even the most modern underground coal mines. Advanced technology reduces the risk of worker fatalities from explosions, but technology alone is insufficient to solve the problem. Management, organisational structure, worker participation, training, and regulatory and enforcement systems are all essential components of an effective risk management process. Knowledge and understanding of the basic principles of methane gas control is fundamental to design effective controls and systems. Ultimately, all explosion accidents are a manifestation of failure to effectively implement safe practices and procedures.

Coal mines are a significant emissions source of methane, a potent GHG with a global warming potential (GWP) of more than 20 times that of carbon dioxide (IPCC, 2007). Methane accounts for 14% of global anthropogenic GHG emissions, and CMM emissions contribute 6% of global anthropogenic methane emissions or close to 400 million tonnes of carbon dioxide equivalent (MtCO₂e) annually (EPA, 2006a; IPCC, 2007; Methane to Markets, 2008). CMM emissions are projected to increase to 793 MtCO₂e by 2020 (ESMAP, 2007). More than 90% of these CMM emissions are from underground mines (EPA, 2006b); of which about 80% is emitted in very dilute form (typically less than 1% methane) through the mine ventilation air.

Technologies already exist that could significantly reduce methane emissions from coal mining. Their successful implementation requires leadership from governments, suitable financing mechanisms, and the commitment of the global coal mining industry.

1.3 Gas Capture, Utilisation, and Abatement

Gas capture and use in coal mines is not new, although there have been major improvements in technology and its application over several centuries. The first recorded methane drainage occurred in the United Kingdom in 1730. More modern, controlled methane drainage systems were introduced in Europe in the first half of the twentieth century.² Utilisation of mine gas for lighting may have occurred as early as the 18th century and was recorded in the 1880s.


By the 1950s, systematic and effective gas capture methods that were originally developed in Germany were being used throughout Europe. Since the 1960s, increasing use has been made of drained gas, initially for mine boilers and industrial processes and then later for power generation, pipeline gas, and town gas.

Figure 1.1 illustrates a three-dimensional schematic, in cut-away perspective, of an underground coal mine workings and surface facilities. This graphic shows the complexity and inter-related aspects of the mine's underground drainage and gas collection systems with the surface facilities needed to convert CMM to electricity. The graphic also illustrates the simultaneous abatement of ventilation air methane (VAM) from the mine ventilation shafts.

mined (SAWS, 2009). In 2008, the United States reported 12 fatalities from underground coal mines, with production of 324 million tonnes, for 0.037 fatalities per million tonnes underground coal mined (MSHA, 2009).

² These included systems in the Upper Silesian basin in Poland in 1937 and in Germany in 1943.

Figure 1.1 Schematic of an Underground Coal Mine Drainage System and Surface Facilities for Energy Recovery and Abatement of CMM

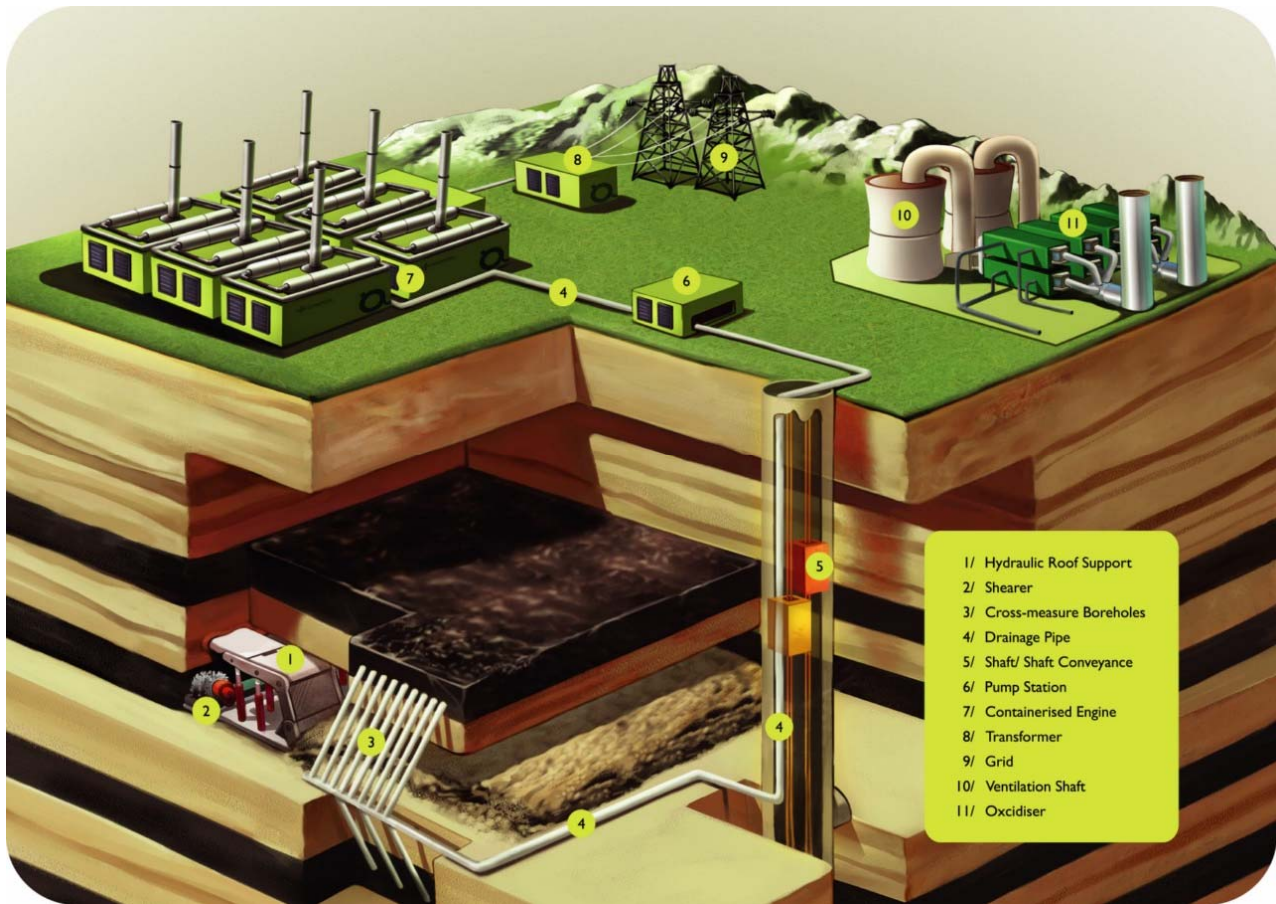

(Courtesy of Green Gas International)

Currently, there are hundreds of CMM gas recovery and utilisation projects around the world that are operating or under development. For instance, the Methane to Markets Partnership estimates that more than 240 projects have operated, are currently operating, or are in development in about 14 countries globally (2009). The most prevalent use for CMM is for power generation; other uses include boiler fuel, injection to natural gas pipelines, town gas, industrial gas, feedstock for conversion to vehicle fuels such as liquefied natural gas (LNG) or compressed natural gas (CNG), and coal drying.

In some cases, methane that cannot be economically recovered and used due to impractical site-specific conditions or markets is destroyed (i.e., flared and thereby converted to carbon dioxide). This reduces the GWP of the emissions. These emission reductions also have the potential to generate revenue from carbon credits in some countries, through both voluntary and compliance carbon markets.

Chapter 2. Fundamentals of Gas Control

Key Messages

Establishing and enforcing regulations for safe gas extraction, transport, and utilisation encourages higher methane drainage standards, as well as increased clean energy production and greater emission reductions.

There is tremendous global industry knowledge about and experience with managing methane explosion risks.

Safe working conditions in gassy mine environments cannot be achieved solely through legislation or even the most advanced technology. Rather, rational and effective management systems, management organisation, and management practices are fundamental to safe operations. Other critical elements of mine safety are appropriate education and training for both management and the workforce, and encouraging worker input as work safety practices are adopted.

2.1 Objectives of Mine Gas Control

The primary aim of gas control systems is to prevent explosions and asphyxiation risks in underground coal mines. Controlling methane at an active longwall face so that methane concentrations in the return airway do not exceed 1% generally requires only using ventilation techniques. However, if higher methane flows are expected from the working face, a combination of ventilation and methane drainage must be used. Best practice gas control for safety will enhance gas utilisation prospects.

Protection measures are available to reduce the propagation of an explosion after it has occurred and are important second lines of defence. Post-failure methane mitigation is no substitute for prevention, however, which is the focus of these guidelines.

2.2 Occurrence of Gas Hazards

Methane-rich gases, generally containing between 80% and 95% methane, occur naturally in coal seams and are released whenever these are disturbed by mining. Coal seam gas only becomes flammable and creates an explosion hazard when allowed to mix with air.


Emissions of large volumes of carbon dioxide are also encountered in coal mines in some geological environments. Carbon dioxide is heavier than air and toxic at concentrations above 5% in air, but physiological effects can be experienced at concentrations as low as 1%.

Methane is colourless, odourless, and tasteless; therefore, a measurement device is needed to confirm its presence. Methane is flammable when it is mixed with oxygen in a range of concentrations as shown in Figure 2.1.

At atmospheric pressure, the most explosive concentration of methane in air is 9.5% by volume. In the confined conditions underground, the maximum explosion pressure can increase as the unburned gas is compressed ahead of the flame front.

In oxygen-deprived environments, such as can occur in sealed goafs, explosive mixtures can only form if air is added. When present at higher concentrations, methane is an asphyxiant due to air displacement. As underground coal mines are confined, ignition of a substantial accumulation of methane invariably leads to an explosion.

Figure 2.1 Formation of Explosive Mixtures

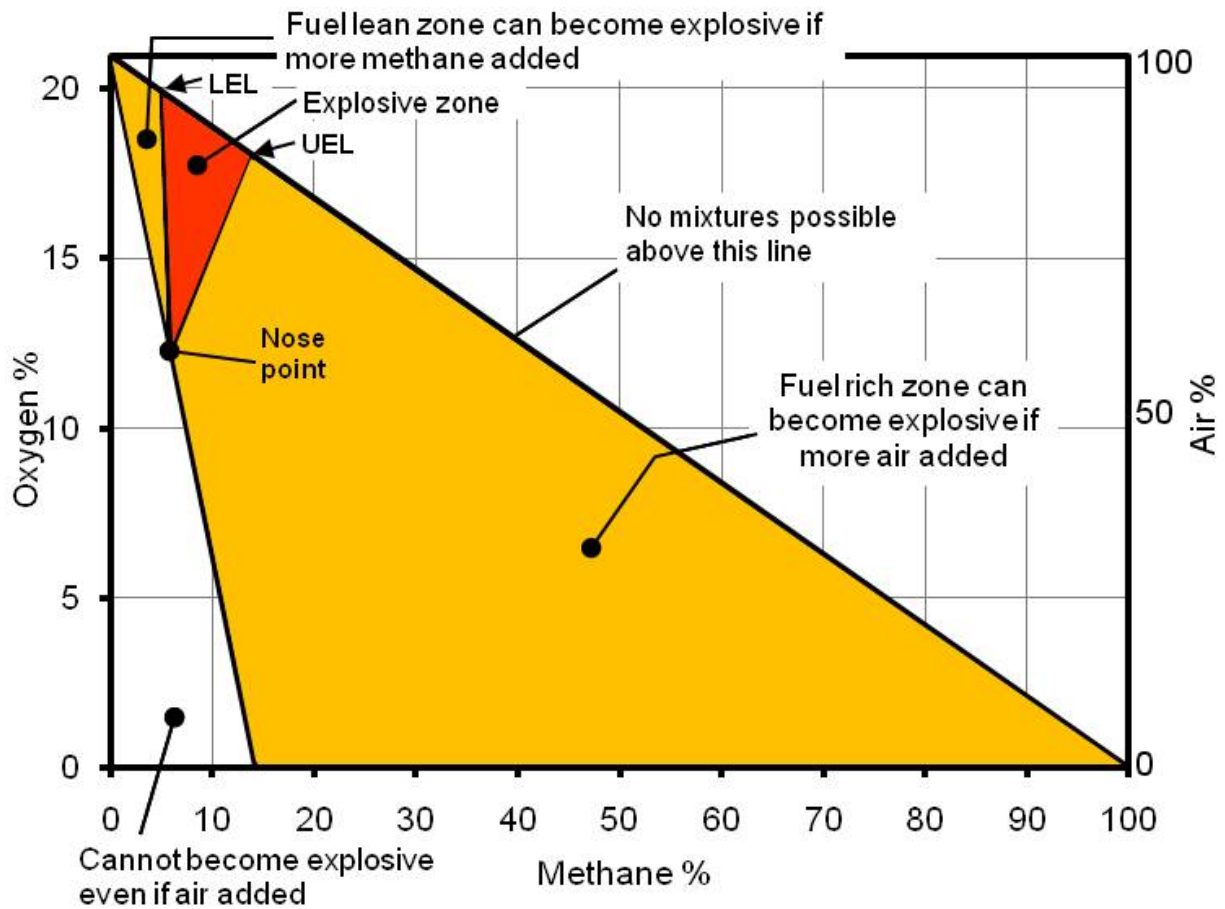

(Source: Moreby, 2009; based on Coward, 1928)

Methane has a tendency to stratify and form horizontal layers near the roof of mine workings where there are insufficiently high ventilation velocities to prevent layering. This phenomenon occurs because methane is lighter than air, with a density of only 0.55 that of air. In many instances, an air velocity of 0.5 metres per second (m/s) will prevent layering but there are some circumstances where this air velocity will be insufficient. Ventilation designers should be aware of variables that inhibit the layering of methane, such a

layer width, inclination of roadway, gas emission rate, and airflow rate (Creedy & Phillips, 1997; Kissell, 2006).

In some circumstances, where mixing is not taking place due to insufficient air velocity, methane layers can form and flow either with the flow or against the flow of the ventilation stream. These methane layers may propagate flame rapidly, thus increasing the risk and severity of explosions by providing a pathway between ignition sources and large accumulations of flammable mixtures (e.g., in longwall goafs). Once methane is mixed with air, however, it will not separate spontaneously.

Mine operators actively isolate areas of mines that are no longer being worked (i.e., worked-out longwalls and sometimes goafs of active longwalls) from the mine ventilation system by constructing barriers or seals. These ventilation barriers or seals are invariably imperfect due to ground movement and will not completely prevent gas emissions from entering into the active mine workings. Explosive gas mixtures can accumulate behind ventilation seals and will flow into airways as a result of ventilation fluctuations or barometric pressure depressions.

High-risk areas in a coal mine—where coal seam methane passes through the explosive range—are in the goaf (gob) behind longwall faces and in the cutting zone of mechanised coal-cutting machines. Explosive mixtures can also form within badly-designed or poorly-operated methane drainage systems due to excessive air being drawn in.

Room-and-pillar mine workings (with no pillar recovery) tend to disturb considerably lower volumes of adjacent strata than longwall methods; therefore, these mines tend to be less gassy than longwall mines. Room-and-pillar mines are not necessarily less at risk from explosions, however, due to the difficulties of achieving adequate ventilation of working faces. The predominant methane source in room-and-pillar workings is the worked seam itself. Layers of flammable gas mixtures can arise in the roof as a result of inadequate ventilation of blind headings and emissions from roof sources (see Case Study 4).

Ignition of Explosive Methane Mixtures

Methane-air mixtures can be ignited by a number of sources: electrical sparks, high temperatures caused by steel striking quartzitic rock, adiabatic compression from falls of rock, aluminium impacting on iron, lightning strikes, smoking materials, explosives and detonators, spontaneous combustion, and naked flames.

The use of increasingly powerful rock- and coal-cutting machinery in modern coal mines has given rise to the serious problem of frictional ignitions. The high frequency of methane ignitions caused by rock- and coal-cutting tools compared to other sources indicates the technical difficulty in achieving absolute control of gas hazards.

2.3 Reducing Explosion Risk

Highlighting the underlying principles of explosion prevention is a major goal of this guidance. This knowledge is essential for effective programme design for controlling gas risks in coal mines. The principles

described herein are synonymous with those embedded in the risk management systems that modern mining companies have implemented in striving towards zero accidents and zero explosions.

Management of coal mine gas explosion risks involves a large number of different activities (see Box 2.1), necessitating good organisation and clear allocation of responsibilities.

Box 2.1 Typical Coal Mine Gas Explosion Risk Controls and Procedures

- Use of flameproof electrical equipment and cables
- Control of explosives and their use below ground
- Provision of adequate fire and rescue facilities
- Gas drainage planning, design, and implementation
- Control of the discharge of drained methane gas
- Control of access to the mine and its working areas
- Restriction of contraband in the underground environment
- Inspection of underground workings
- Provision of anti-static materials
- Supervision of mining operations
- Use and maintenance of mechanical and electrical plant
- Provision for restricting the use of unsuitable equipment
- Supervision of mechanical and electrical operations
- Restriction of smoking materials below ground
- Ventilation planning
- Control of the mine ventilation
- Monitoring and measurement of mine gas concentrations
- Use of auxiliary ventilation
- Degassing of headings
- Frictional ignition precautions
- Provision of methane detectors
- Qualifications of employees
- Safety training
- Provision of explosion suppression barriers
- Posting of warning signs and notices

Reducing explosion risk by preventing the occurrence of explosive mixtures wherever possible—and taking measures to ensure separation of explosive mixtures from potential ignition sources—are the best safety practices in coal mines.

Controlling the dilution, dispersion, and distribution of flammable gases in coal mines to minimise the availability of fuel for ignition is critical. The risks associated with flammable gases in underground coal mines can be minimised in several ways: by diluting them to safe concentrations with ventilation air; by using proprietary devices to ventilate coal-cutting machines; by diverting gas away from working areas; and, where necessary, by capturing gas in boreholes or gas drainage galleries before it can enter mine airways.

The fundamental principles of reducing explosion risk are as follows:

- Wherever possible, prevent occurrence of explosive gas mixtures (e.g., use of high-efficiency methane drainage methods, prevention and dispersal of methane layers by ventilation velocity).
- If explosive gas mixtures are unavoidable, minimise the volumes of explosive mixtures (e.g., rapid dilution in ventilation air to permissible methane concentrations).
- Separate unavoidable gas mixture occurrences from potential ignition sources (e.g., by using specially designed face-end ventilation systems to prevent gas accumulations near electric motors or avoiding use of electricity in longwall district return airways).
- Avoid ignition sources as much as possible (e.g., unsafe electric devices, naked flames, smoking).
- Control gas emissions from worked-out, sealed areas of the mine by using gas drainage methods regulated to maintain gas purity and by draining gas to accommodate fluctuations in barometric pressure.

2.4 Regulatory and Management Principles

Effective Safety Regulatory Framework

An effective safety regulatory framework will provide coherent and clear guidance to the industry under the aegis of a lead safety authority, with clearly defined roles and responsibilities that do not overlap with those of other authorities.

Comprehensive coal mine gas safety regulations provide no guarantee of safe working conditions. To be effective, regulations must be understood, applied, and enforced by mine inspectors, mine management, supervisory staff, and mine workers. Proactive risk management and bottom-up safety responsibilities are the keys to prevention of gas accidents. Officials and miners can only be proactive if they understand the underlying principles of gas emission and control processes. Training and knowledge transfer are therefore necessary elements of a successful safety programme, as well as ready access to factual reports on gas incidents and their causes. Safety management and training should encompass both mine employees and contractors.

Enforcement

Effective government inspectors audit mine safety conditions by conducting detailed underground inspections, providing expert guidance to mine management, reviewing the efficacy of regulations, and ensuring compliance with the regulations by working with mine operators to correct any deficiencies or penalise those who conspicuously ignore regulations and endanger life. Effective safety and regulatory management systems also involve those who are most affected by failure to control gas, the miners themselves. To ensure the most effective risk management, emphasis must be on accident or incident prevention rather than punishment after an event.

Successful management of health and safety risks not only involves the regulatory authorities and the mine operator, but must include the mine workers as equal participants. As outlined in the International Labour Office's *Code of Practice on Safety & Health in Underground Coal Mines* (ILO, 2006), workers are entitled to a safe working environment, including the ability to report potential hazards without fear of

retribution. Moreover, as partners in developing safe working conditions, workers are obligated to support safe working practices and maintain a safe mining environment.

Permissible Gas Concentrations for Safe Working Conditions

Prescriptive regulations should be used sparingly, as they can stifle innovation. They are justified by physical imperatives such as the explosive range of flammable mine gases in air. All coal mining countries set upper limits of permissible methane or flammable gas concentrations that should not be exceeded in mine airways. Some apply different mandatory gas concentration limits in different parts of a coal mine depending on the activity and the risk of explosive levels being reached, and set minimum safe concentrations for transporting and using gas to minimise the risk of underground explosions (Table 2.1).

Table 2.1 Selected Examples of Regulatory and Advised Flammable Methane Concentration Limits

Limiting flammable methane concentration [%]	Australia	China	Germany	India ^h	South Africa	United Kingdom	USA	Factors of safety ^a
Maximum below which working is permitted in general	1.25	1.0	1.0	1.25	1.4	1.25	1.0	3.6 – 5.0
Maximum below which working is permitted in return airways	2.0 ^b	1.5 ^g	1.5	0.75	1.4	2.0 ^b	2.0 ^b	2.5 – 6.7
Minimum permitted for utilisation	na ^e	30	25	na ^f	na ^f	40	25 ^c	1.7 – 2.7
Minimum for underground pipeline transport	na ^e	na	22	na ^f	na ^f	na ^e	na ^d	1.5

(a) Factors of safety indicate the range of multiples below the lower explosive limit of 5% or above the upper explosive limit of 15% methane in air;

(b) If no electricity;

(c) The United States handles methane degasification in the ventilation plan, there are no codes or regulations;

(d) Not considered a problem as lower concentration goaf gases are generally drained at surface wells;

(e) Determined by local risk assessment;

(f) Few or no applications so not addressed;

(g) 2.5% for a non travelling return;

(h) In India, methane standards are specified in Indian Coal Mine Regulation 1957, which is based on Mines Act 1952.

The precise action levels for gas concentrations by themselves are insufficient to ensure safe mine conditions. It is just as important to identify suitable locations at which the concentrations are measured, the procedures to be used for measurement, and the actions to be taken as a consequence of the measurements. Mining legislation in industrialised countries generally focuses on monitoring and control efforts in proportion to the degree of expected risk.

Safe Transport and Utilisation of Gas

Transport and use of explosive mixtures of gas is hazardous due to the dangers of propagating an explosion into the working areas of a mine. National mine safety regulations vary in their assessment of the minimum methane concentration considered safe for transport and utilisation, which varies from 25% to 40% among countries. A factor of safety of at least two times the upper explosive limit (i.e., 30% or greater methane concentration) is generally acknowledged as a good practice minimum.³ Accidents involving pipelines carrying methane at concentrations well above the upper flammable limit do not result in explosions because the gas is at too high a purity to burn; in these cases, a fire at the gas/air interface can be extinguished by fire fighting techniques. In contrast, an ignition of low-purity gas (e.g., in the range of 5% to 15%) in a pipeline can cause the flame front to accelerate in both directions within the pipe, creating intense explosive forces and putting the entire mine in jeopardy.

Regulations to Reduce Ignition Risk

Most mining countries have regulations governing the type and use of materials permitted underground to minimise ignition risks. Not all potential ignition sources can be eliminated, however.

Electricity is needed to power mining equipment. Its safe use depends on the adoption of flame proofing and intrinsic safety standards, the use of armoured cables and safe connectors, and rigorous inspection and maintenance (I&M) procedures. Usually, regulations prohibit the use of electricity in specific roadways within a longwall district where elevated methane concentrations could arise or wherever concentrations near the flammable gas limits (i.e., exceeding 1% methane) is permitted.

Frictional ignition risks on coal-cutting machines are minimised by using sharp cutting picks, properly positioned water sprays, and machine ventilation systems. Conveyors can also be an ignition source due to overheating, but this risk can be substantially reduced through regular I&M. Inappropriate human behaviour, such as lighting a cigarette underground, has been known to be a source of mine explosions.

³ A factor of safety of at least 2.5 below the lower explosive limit of methane (i.e., below 2% methane) is a good practice maximum, in the absence of electricity; a higher factor of safety being necessary if electricity is in use.

Chapter 3. Occurrence, Release, and Prediction of Gas Emissions in Coal Mines

Key Messages

Methane gas flows into coal mines under normal, steady-state conditions are generally predictable.

Unusual emission and outburst events are not easily predicted, but the conditions under which they can occur are reasonably well-known. Detailed methods for reducing risks under these conditions have been developed and should be applied wherever significant risks are identified. In such circumstances, safe working conditions depend on the rigor of implementation and monitoring of gas control methods.

The importance of not only installing underground monitoring for operational mine safety reasons but gathering and using the data for safety planning cannot be overstated.

3.1 Introduction

Modern, high-production coal mines encounter increasingly high gas flows as their coal extraction rates increase and they work deeper, higher-gas content coal seams. Knowledge of the occurrence, emission characteristics, and expected gas flows from a coal mine as a function of the coal production rate is essential for safety, mine planning, ventilation, gas utilisation, and GHG emission control purposes.

3.2 Occurrence of Gas in Coal Seams

The naturally-occurring gas found in coal seams consists mainly of methane (typically 80% to 95%) with lower proportions of heavier hydrocarbon gases, nitrogen, and carbon dioxide. The mixtures of methane, water vapour, air, and associated oxidation products that are encountered in coal mines are often collectively termed "mine gas."

Methane was formed in coal seams as a result of the chemical reactions taking place as the coal was buried at depth. Plant debris such as that found in modern swamps will slowly change from wet, organic detritus to coal, if the material becomes buried at a sufficient depth and remains covered for a length of time through a process known as coalification. The greater the temperature, pressure, and duration of coal burial, the higher the coal maturity (i.e., rank) and the greater the amount of gas produced. Much more gas was produced during this coalification process than is now found in the seams. The gas lost during the coalification process has been emitted at ancient land surfaces, removed in solution by ground water passing through, or has migrated and been trapped in the pore spaces and structures in surrounding rocks. This gas may have accumulated in adjacent porous strata such as sandstones or may have been adsorbed by organic shale. These reservoir rocks can become significant sources of gas flows into the mine if these gas-bearing layers are sealed by surrounding impermeable strata and remain undisturbed until mining takes place. Methane occurs in much higher concentrations in coal compared to any other rock type because of the adsorption process, which enables methane molecules to be packed into the coal substance to a density almost resembling that of a liquid. In a vertical sequence of coal seams, methane content often increases systematically with depth and rank. Gas content-depth gradients vary from coalfield to coalfield and

reflect the geologic history of the basin in which the coal formed. In some coal basins, methane contents increase with depth, finally reach a maximum and then decrease below this level.


3.3 The Gas Release Process

The gas that is naturally produced and stored in coal and surrounding strata can be released if disturbed by mining activity. The rate and amount of gas released depends on the initial amount of gas in the coal (gas content), the distribution and thickness of coal seams disturbed by mining, the strength of the coal-bearing strata, the geometry of the mine workings, the rate of coal production, and coal seam permeability. Total gas flow varies proportionally to the rate of disturbance of strata by mining activity. In a particular geological setting, therefore, the total volumes of gas released during mining increase proportionally with the increase in the rate of coal extraction. In certain circumstances, however, rapid ejection, or outbursts, of coal and gas and sudden emissions of gas can also occur.

Some coal seams mined in Australia and elsewhere have adsorbed substantial amounts of carbon dioxide as well as methane. Where these coal seams are mined, outbursts may occur at a lower total in situ gas content of the coal seam than would be expected if only methane was present. Therefore, the in situ content of both gases should be measured to assess the need for pre-drainage.

European studies (Creedy et al, April 1997) have shown that a de-stressed arch or zone of disturbance, within which gas is released, forms above a longwall typically extending 160 m to 200 m into the roof and below the longwall to about 40 m to 70 m into the floor. Figure 3.1 is a picture of a plaster model showing the distressing of overlying material after a void space was created. This modelling procedure is useful in determining the magnitude of de-stressing that takes place and the height above the void that noticeable bed separation, fracture opening, and other forms of strata relaxation occurs, thereby increasing the permeability and creating pathways for gas migration. Various theories and empirical models have been developed to represent this process.

Figure 3.1 Model Section Parallel to the Longwall Face Showing the Strata Fractured as a Result of Removing the Coal, Thus Forming the Goaf

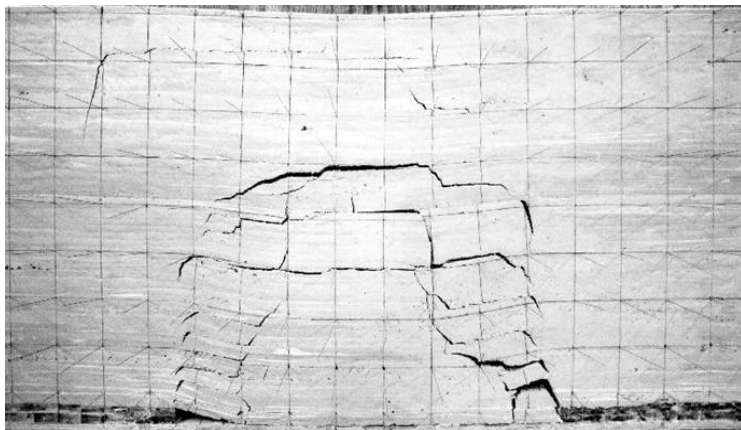

(Modeled after Gaskell, 1989)

Coal seam extraction leads to subsidence at the surface. While all the seams between a longwall and the surface will be disturbed, only gas within a de-stressed arch enters the workings. Boreholes from the surface and shallow excavations will sometimes encounter released coal seam gas that would not normally be emitted during mining. Gas production may then occur. However, the borehole or excavation can also serve as a migration pathway for gas not captured, resulting in surface and subsurface hazards.

3.4 *Relative Gassiness of Coal Mines*

The “specific” (or “relative”) emission rate is commonly used to represent the gassiness of a mine, or of a longwall district. It uses the same units as gas content (i.e., cubic metres of methane emitted per tonne of coal or m^3/t), but it is conceptually very different.⁴ The specific emissions represent the total volume of methane released from all sources divided by the total amount of coal produced during a referenced period of time, ideally a week or more. In other words, this measurement is really cubic metres (m^3) of methane emitted per tonne (t) of coal mined over any given period of time. The gas being emitted, and measured, is coming not just from the coal that is being extracted, but all of the strata that is disturbed and becomes relaxed as the void left by the mining process collapses. Generally, coal mines with specific emissions of $10 \text{ m}^3/\text{t}$ and higher are considered gassy. Specific emissions as high as $50 \text{ m}^3/\text{t}$ to $100 \text{ m}^3/\text{t}$ have been encountered in mines in some countries, such as the United Kingdom and the United States, but these levels are exceptional (Kissell et al, 1973).

3.5 *Understanding Gas Emission Characteristics of Coal Mines*

Peak flows of gas occur in the return airways of working districts during the coalface cutting cycle and following roof caving as longwall supports are advanced. Statistical studies have shown that these peaks typically rise up to 50% above the mean (Creedy et al, April 1997). Gas prediction methods commonly use this relationship in estimating the volume of air that will be necessary in order to meet mandatory gas dilution requirements.

The volume of gas released from any coal disturbed by mining decreases over time, while continued mining activity adds new gas sources. The resultant emissions are therefore determined by the sum of all the sources over time. As a consequence, the specific emission (i.e., the amount of gas emitted per tonne of coal mined) can increase over the life of a longwall. When coal production stops, gas continues to desorb from the coal seam and flow from the non-coal strata, but at a declining rate. When a mine commences coal extraction after a few days of stoppage, gas emission will be initially lower than at steady production.

Most empirical emission calculations assume steady-state coal production and uniform emission characteristics. While this approach suits most planning needs, mine operators must also consider other less predictable factors. Therefore, risk control methods are critical to reduce the likelihood of serious occurrences. For example, sudden outbursts of gas and coal (and sometimes rock) from the worked seam are encountered in certain mines with high gas contents and low-permeability coal. The principal geological and mining factors, which give rise to the highest risk of an outburst occurrence, can often be

⁴ Gas content is defined and described in Section 3.6.

identified, but the actual incidence cannot be predicted with any certainty. Coal mine management can address this safety issue by implementing rigorous outburst prevention and control methods. These methods typically involve reducing the gas content of the coal to below a critical amount by draining the gas before mining.

Sudden emissions of gas can occur from the floor of a longwall working, either onto the face or into the roadways near the face. This type of emission is considered especially likely when the floor contains a strong sandstone bed and another coal seam lies within 40 m to 60 m below the working seam. Although predicting an occurrence is problematic, prevention can generally be assured by drilling a regular series of floor boreholes to prevent accumulation of gas pressure.

Sudden emissions and outbursts can cause considerable damage and result in injuries and fatalities. If the air/methane mixture is in the flammable range, sparks from rock striking metals can also ignite the mine gas.

Coal mine workings can sometimes disturb natural gas reservoirs, leading to emissions up to twice those expected from coal seam sources alone. The natural gas reservoirs may be strata inter-bedded with the coal seams and occurring as a normal part of the coal bearing sequence, but because geologic processes obstructed or sealed-off gas migration pathways, the trapped gas is subsequently released during mining. Such situations are not easily identified before mining, but mine operators should be vigilant about this possibility by comparing measured and predicted data. The importance of not only installing underground monitoring for operational mine safety reasons but gathering and using the data for safety planning cannot be overstated.


3.6 Measurement of the In Situ Gas Content of Coal

Planning gas drainage and ventilation systems to ensure safe mining requires knowledge of the amount of gas adsorbed in the coal substance and, to a negligible extent, the amount of gas compressed in the larger pore spaces. Gas content is expressed in volume of gas contained per mass of coal substance in situ (m^3/t) and should not be confused with specific emissions.⁵ The general approach for measuring the gas content is to obtain and seal coal samples in canisters in as fresh a state as possible. These samples are maintained at near-reservoir temperature while gas is allowed to desorb. The measured release rate allows estimation of the gas lost prior to sampling. Figure 3.2 is a diagram showing an apparatus designed to collect and measure gas as it is desorbed from coal contained by a sealed canister. The procedure for using this system includes collecting the sample of coal from a borehole and sequestering the coal in a canister. Periodically, the gas in the canister is allowed to flow into the measuring cylinder and the volume of gas measured and recorded. The composition of the gas may be analyzed by capturing a sample and submitting it for chemical analysis. The gas remaining in the coal after the initial tests is determined by crushing the coal and measuring the quantity released. The U.S. Bureau of Mines (USBM) gas content measurement method is the most commonly used technique and usually requires a period of days to several weeks (Diamond & Levine, 1981). Quick desorption methods have been developed in Europe and Australia to provide rapid results to suit operational mining needs (Janas & Opahle, 1986). In addition, for

⁵ The measure of gas emitted during mining operations compared to the amount of coal produced.

low-permeability coals, partial pressure and statistical methods have also been devised (Creedy, 1986). Because coal seams include mineral matter as well as coal substance (gas is predominantly adsorbed on organic substances), gas contents are generally adjusted to an ash-free basis. The gaseous components are sometimes measured separately; in most instances, the gas is predominantly methane. Typical methane coal seam contents found in nature range from trace levels to around 30 m³/t.

Figure 3.2 Gas Content Measurement Equipment (Australian Standard)

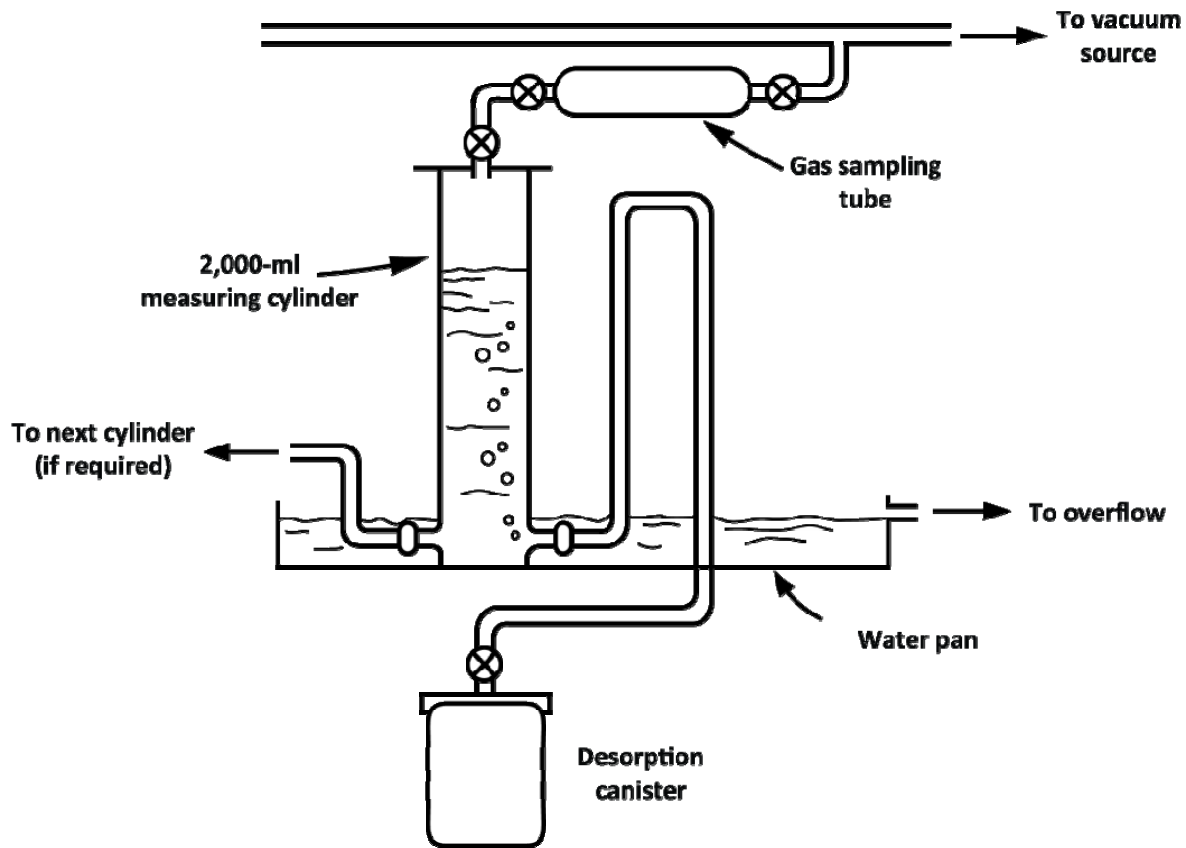

(Based on Diamond & Schatzel, 1998)

3.7 Practical Estimation of Gas Flows in Coal Mines

Rigorous theoretical gas emission flow and simulation models have been developed within academia and by research institutes. For practical purposes, mines generally use empirical gas emission models that have been proven to be very reliable when used in conjunction with local knowledge and expertise. These models require inputs of parameters including seam gas contents, mechanical properties of the rock and coal strata, mining geometry, and coal production rates. Users can build their own models using published information, or they can purchase proprietary software. Flow estimates are expressed in either relative terms of cubic metres of gas released per tonne of coal mined (specific emissions in m³/t) or in absolute terms, as a steady-state flow rate of cubic metres per minute (m³/min) or litres per second (l/s).

Models may predict the effects of increased coal production rates on gas flows. They can also forecast the maximum controllable gas flow and the associated maximum coal production affected by the following parameters:

- The statutory flammable gas concentration limit in longwall district return airways.
- Ventilation air quantities available and airflow volumes that can be circulated around the working districts. The airflow volume that can be delivered to a working longwall depends on the number of roadways, ventilation configuration of the production district, and maximum acceptable velocity for miner comfort.
- The gas drainage capture that can be consistently maintained, if gas drainage is used.

Chapter 4. Mine Ventilation

Key Messages

Mine ventilation systems are critical components of an overall system to effectively remove methane from mine workings. A mine ventilation system is designed to achieve three objectives: 1) deliver breathable fresh air to the workers, 2) control mine air temperature and humidity, and 3) effectively dilute or remove hazardous gases and airborne respirable dust.

Improvements to methane drainage systems can often provide a more rapid and cost-effective solution to mine gas problems than simply increasing the mine's air supply.

4.1 Ventilation Challenges

Achieving effective ventilation in coal mines is ultimately the factor that limits coal production at a given mine. The maximum rate of coal extraction that can be safely achieved on a gassy working coalface is determined by the combination of ventilation capacity to dilute pollutants to acceptable concentrations and methane drainage efficiency.

Ventilation is the primary means of diluting and dispersing hazardous gases in underground mine roadways. Air velocities and quantities are optimised to ensure dilution of gas, dust, and heat. The greater the fresh air quantity supplied to the coalface, the greater the inflow of gas that can be diluted. This dilution process is inherently limited by air availability within the mine and maximum tolerable air velocities.

Ventilation pressure is proportional to the square of the airflow volume. A modest rise in air quantity therefore requires a significant increase in pressure, which leads to greater leakages across goafs and ventilation doors. Excessive leakage flows across the goafs may also increase spontaneous combustion risks and can impair gas drainage systems.

The volume of air required to ventilate the underground workings and the permissible level of pollutants is often mandated by local government agencies. A ventilation system that is designed simply to comply with legal minimum airflows or air velocities may be inadequate for the purpose of maintaining a safe and satisfactory environment in an active mine. For this reason, ventilation system design specifications must take into account the expected worst-case pollutant levels.

Methane is considered the principal pollutant and the most hazardous gas for ventilation system specifications. If the selected ventilation system design is capable of removing or satisfactorily controlling the primary pollutant, it is assumed that the lesser pollutants will be adequately controlled or removed at the same time.

4.2 Key Ventilation Design Features

Generally, air is drawn (sucked) through a mine by exhaust fans located on the surface. Thus, the air pressure in the mine is below atmospheric pressure. In the event of fan failure, the ventilation pressure in the mine rises, preventing an instantaneous release of gas from worked areas.

The deeper and more extensive the mine, the more complex the ventilation circuit and the greater the propensity for leakage losses through communicating doors in the mine between intake and return airways. Thus complex, larger mines have limited quantities of fresh air available for use in blind headings and on working coalfaces, which requires the use of auxiliary ventilation ducts. Nevertheless, sufficient air must be supplied to allow headings to be ventilated in parallel and not in series; with the latter arrangement, a gas problem in one heading will be rapidly transmitted to the next. Best practice is to make arrangements for the supply of electricity to be cut off from all working places downstream of a working place in which the methane concentration has exceeded the statutory maximum.

Ventilation requirements are dynamic. Ventilation air demand increases as a mine is developed and the area being ventilated increases, sometimes requiring installation of additional ventilation shafts, upgrading fans, or enlarging existing airways.

Proprietary software is available for modelling ventilation networks. Actual pressure and flow surveys should be made at regular intervals to calibrate the model and check the system performance as changes are made.

Whenever possible, the ventilation system should be designed so that the various ventilation “splits” or branches are naturally balanced. This action reduces the need to install flow-control devices such as air locks. The opening and closing of such devices to allow the passage of personnel has a profound effect on the airflows in the branch.

The surface fan(s) should be designed to satisfy the mine ventilation requirements. Surface fans can generally be adjusted within certain limits to ensure that they meet the requirements without suffering aerodynamic instability. Older surface fans installed at some mature mines are often operating at their design maximum duty. In such cases, any increase in airflows to the more remote parts of the mine can only be achieved by improvements to the ventilation air network.


4.3 Ventilation of Gassy Working Faces

Different coalface layouts control the gas, dust, and heat that result from coal extraction with varying degrees of effectiveness. The principal gas risks are associated with areas of coal workings in which the seam has been partially or wholly extracted (whether by longwall or room-and-pillar methods) and are no longer safely accessible (i.e., goafs). All longwall or pillar recovery operations are in direct contact with mined-out areas where methane, oxygen-deficient air, and other hazardous gases can accumulate. These gases include methane not captured by gas drainage, plus continuing emissions from coal left in the goaf.

These gases are handled in one of two ways. First, they may be allowed to enter the mine air stream where sufficient air is available to dilute the maximum expected gas flows in the airways to safe

concentrations (Figure 4.1). As an example only a longwall with U-ventilation, as shown in Figure 4.2, and 50% methane capture can handle a total gas flow of 800 l/s (48 m³/min) pure methane.⁶ A best practice multi-entry longwall and 70% methane capture can control 5,333 l/s (320 m³/min) pure methane, an increase by a factor of more than six.^{7,8}

Figure 4.1 Airflows Required for Diluting Longwall Methane Emissions to 2%, Allowing for Peaks

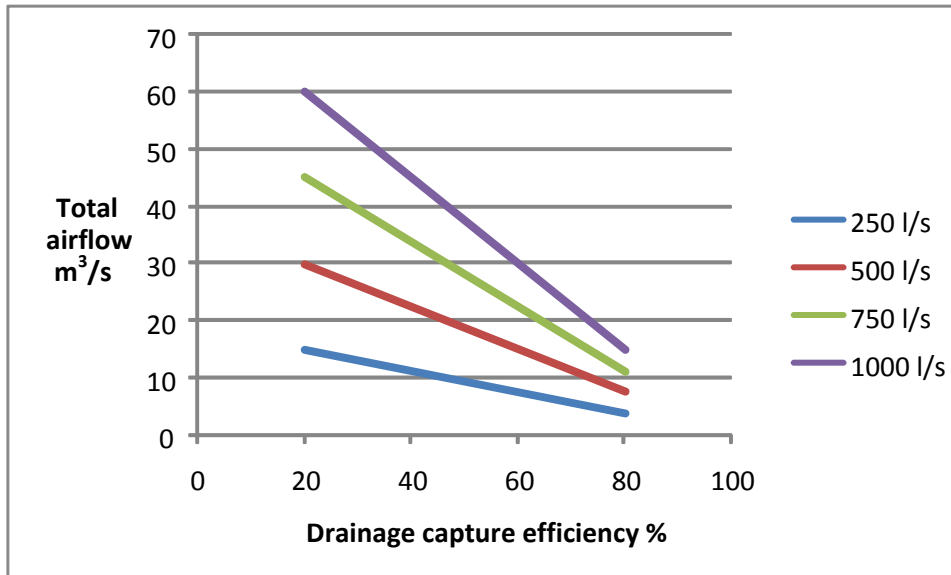

(Courtesy of Sindicatum Carbon Capital)

Secondly, where permitted by local spontaneous combustion propensity or local strata behaviour, some portion of the gas may be diverted into a bleeder road behind the face, or across old goafs, to discharge into main returns or at bleeder shafts (i.e., vertical shaft through which gas-laden air from working districts is discharged). The efficiency of these “bleeder” systems depends on the distribution of ventilation pressures in the workings, which are adjusted using partial obstructions (regulators) in the airways. The methane concentrations in bleeder roads in some countries are regulated to below 2% to reduce explosion risk.

There is a practical upper limit to the quantity of air that can be passed along a coalface without creating an unacceptable working environment, mainly due to airborne dust particles. Coalface airflow limitations restrict the ventilation achievable in the conventional U-ventilation system (Figure 4.2). Where the available airflow is insufficient to dilute the gas emitted from the workings, additional air can be introduced independently by adopting mine layouts in various configurations such as the “3-Road” and “Y” systems, shown in Figure 4.3. These ventilation systems, however, require higher investment such as driving of an additional roadway, roadside dam (pack wall), and strong support of the roadways remaining open behind the longwall in the goaf. In Figures 4.2 and 4.3, broad blue arrows show direction of mining,

⁶ Single intake airway and a single return airway, 2% maximum methane and 30 m³/s air.

⁷ Multiple entry, 2% maximum methane and 120 m³/s air.

⁸ In both cases, an allowance is made for peaks 50% above the mean.

light blue arrows show direction of air flowing from intake, and red arrows show direction of return air flow.

Regardless of whichever system or layout is being used, a sufficient volume of fresh air must arrive at the coal-cutting machine to dilute the coal front gas (arising from the remaining seam gas content after any pre-drainage) to satisfy the local statutory limit. The selected layout should be capable of providing a good standard of ventilation at the most effective methane drainage drilling locations. If this standard is not achieved, it will result in lower drainage efficiency, greater ventilation air demand, and reduced coal production.

Figure 4.2 Conventional U-type Ventilation System


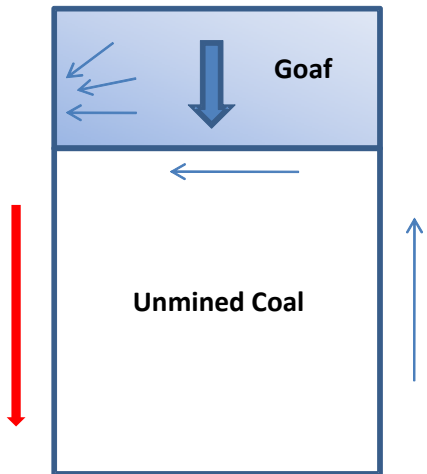


Figure 4.3: Ventilation Layouts Used on Gassy Longwall Working Faces

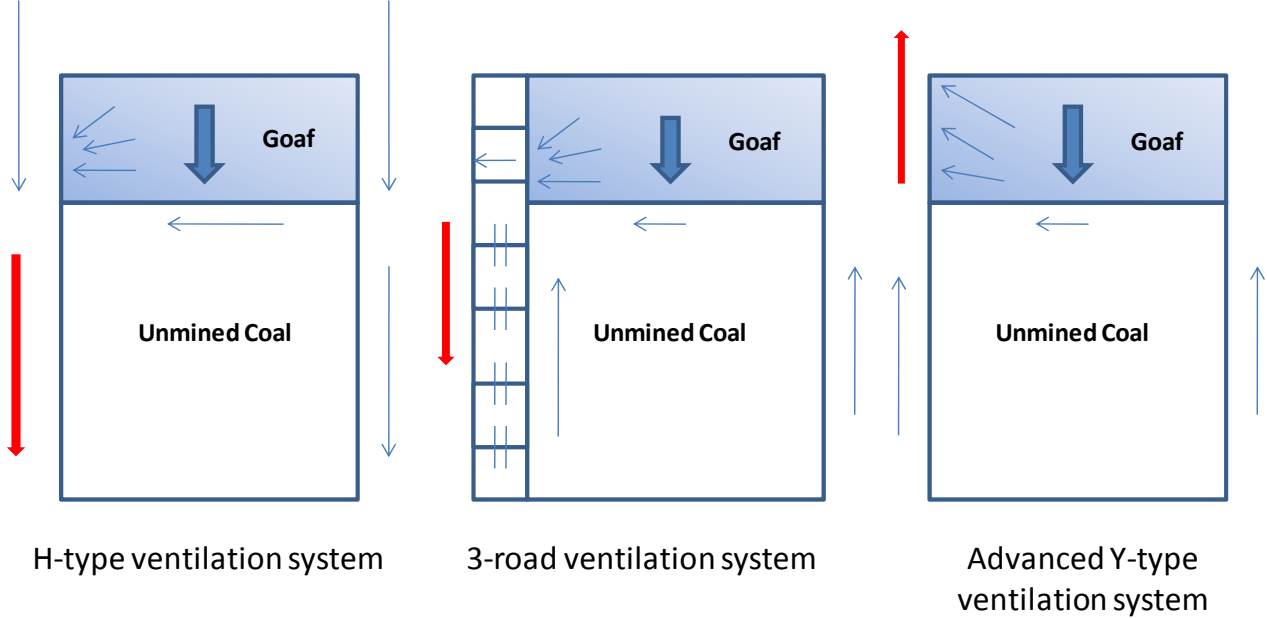

Gas control and access for drilling and regulating cross-measure drainage boreholes is simpler on advancing compared with retreating longwalls. However, most of the world's longwall coal production

comes from retreating coalfaces as these are more productive, and ventilation configurations have been developed as attempts to incorporate the advantages of both by ventilating behind the coalface such as “Y,” “H,” and back-return systems.⁹


The ventilation system should incorporate some means of creating a pressure gradient at longwall face-ends to ensure that flammable gas mixtures do not encroach on the working face. This can involve use of regulators (partial obstructions) in roadways and special face-end ventilation arrangements to divert airflow along the waste edge behind the coalface.

Methane layering hazards are a manifestation of inadequate ventilation in the mine. Their presence indicates the need for gas monitoring, an insufficient air velocity to disperse gas layers, and the possible need to improve gas drainage to remove the gas at its source.

4.4 Ventilation System Power Requirement

A small change in air volume transported by the mine ventilation system requires a much larger change in power consumption and hence ventilation cost. The ventilation system power requirement, which is one of the most important operating costs at a mine, is proportional to the air volume flow cubed (Figure 4.4). Therefore, introducing gas drainage or increasing its effectiveness often represents a lower-cost option than increasing ventilation air volumes, which might also involve major infrastructure development in the mine.

Figure 4.4 Example of Ventilation Air Power Requirement versus Airflow

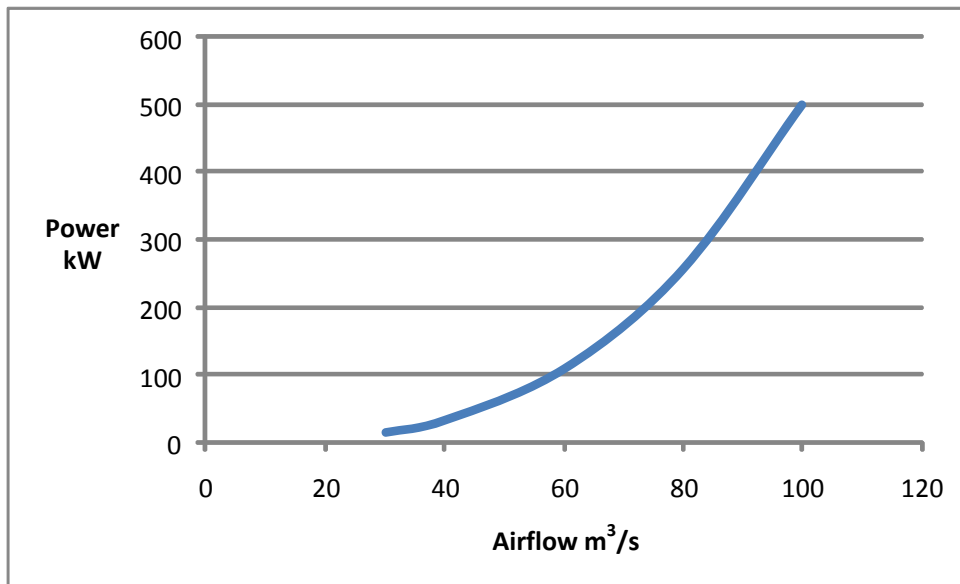

(Courtesy of Sindicatum Carbon Capital)

⁹ See Figure 9.1 in Case Study 1 for an example of a back-return system.

4.5 Ventilation of Coal Headings

Effective gas control in blind headings and room-and-pillar mines can be achieved by a combination of providing auxiliary ventilation and using cutting machine-mounted ventilation devices to dilute gas released when cutting coal.

Coal headings are usually ventilated by an auxiliary fan and duct system, either exhausting or forcing, or a combination of the two. Gas hazards can develop rapidly in the event of any failure of the auxiliary ventilation system. Once gas has accumulated, safe re-entry to a heading requires special procedures. To reduce gas accumulation risks, some mines allow automatic restart of underground fans following short stoppages under certain conditions.

Ventilation system failures due to power interruptions, mechanical faults, and faulty auxiliary fan ducting have been a contributory factor in many serious gas-related accidents. Dual power supplies to mines and standby surface and underground booster fans ensure redundancy in the main ventilation system.

4.6 Ventilation Monitoring

Ventilation monitoring can be performed in two primary ways: 1) continuously using fixed air velocity transducers transmitting data to the surface, or 2) periodically using calibrated, hand-held equipment.

The accuracy of continuous flow monitoring depends on several factors: the positioning of transducers, proper calibration, and the cross-sectional area of the roadway, which can change over time as a result of mining disturbance. Airflows in working districts and headings should be monitored continuously, as they are critical to both safety and coal production.

Measuring locations should not be sited where locomotives or other vehicles are parked, as these disturbances will create intermittent changes in local air velocity.

Hand-held vane anemometers are suitable for use anywhere in a mine, including unstable areas, because the airway dimensions can be checked with every air velocity measurement. Air measuring devices must be recalibrated at fixed time intervals to ensure their accuracy.

4.7 Ventilation Control

Distribution control includes redirecting airflow to one location at the expense of other airflows. The relationship between aerodynamic resistance, air pressure, and rate of airflow is well known, and can be used to predict the outcome of airflow redistributions.

Overall control of the mine ventilation system is directed primarily by the surface fan(s). Increasing the differential surface fan pressure applied at a mine may have only negligible effect on airflows in the most remote parts of the mine. For this reason, increasing surface fan pressure may not solve a problem of shortfall in ventilating airflows in remote working areas. Strata pressures may cause the roof, ribs, and floor to converge, which causes increased airflow; therefore, roadways must be maintained to facilitate efficient ventilation as designed.

Continuously controlling and adjusting the main fan is not advisable. A relatively constant airflow underground minimises the risk of spontaneous combustion and assists in monitoring airflows and pollutant levels. Where a mine is served by a redundantly designed surface fan system (one or more fans running, and one or more fans on standby), using a fan changeover facility is preferable to ensure that mine airflows are not interrupted when the surface fans are stopped for routine maintenance or inspection.

Chapter 5. Methane Drainage

Key Messages

Experience in industrialised countries shows that investment in good gas drainage practices results in less mine downtime due to gassy mine conditions, safer mining environments, and the opportunity to utilise more gas and reduce mine methane emissions.

Practical gas drainage problems at coal mines can generally be resolved by applying existing knowledge and techniques. Introducing new or novel technologies should only be considered after application of good practices, and only if existing techniques have failed to provide a satisfactory solution. Rigorous testing should precede introduction of any technology into the mining environment to ensure that safety is not compromised and best practices are maintained.

Methane drainage system performance can be improved through proper installation, maintenance, regular monitoring, and implementation of systematic drilling plans.

Transporting methane-air mixtures at concentrations in or near the explosive range in coal mines is a dangerous practice and should be prohibited.

5.1 Methane Drainage and Its Challenges

The purpose of methane drainage is to capture high-purity gas at its source before it can enter mine airways. For regulatory purposes, the amount of gas released into the air flow must not exceed the capacity of the ventilation air used to dilute gaseous pollutants to mandated safety levels; however, there is a strong case for maximising gas capture to achieve enhanced safety, environmental mitigation, and energy recovery.

There is a wide range of gas capture methods. Choosing unsuitable methods or poor implementation of those methods will result in low drainage capture efficiencies and excessive ingress of air-producing flows of low-concentration gas. When these gases are in or near the explosive range during transport and use, they create hazards.

5.2 Basic Principles of Methane Drainage Practices Employed Worldwide

Differing geological and mining conditions in the world's coal basins have resulted in the development of different methane drainage techniques.

Methane drainage methods are conventionally classified as involving either pre-drainage or post-drainage techniques. *Pre-drainage* involves removing methane from the seam to be worked in advance of mining, while *post-drainage* involves capturing methane and other gases released from surrounding seams as a consequence of the strata movement, relaxation, and increased permeability induced by mining. A summary of the most common methane drainage methods is provided in Appendix 1.

Good practice post-drainage techniques can typically capture 50% to 80% of the total gas from a longwall district in the absence of unusual geological conditions. 50% gas capture from the entire mine is an achievable target in most cases. Methane concentrations of 30% and higher should be achievable using post-drainage systems in all but the most challenging mining conditions, and concentrations of 60% and higher should be achievable from pre-drainage methods.


5.3 Pre-Drainage Basics

Pre-drainage is the only means of reducing gas flow directly from the worked seam, which can be important if the seam being extracted is the main gas emission source. Pre-drainage is also sometimes necessary for reducing outburst risks. Because the drainage is undertaken before mining, the collection systems are not likely to be disturbed by ground movement, and, if feasible, relatively high purities of gas can usually be extracted. Drainage from blocks of coal ahead of mining generally produces consistent gas flows of high purity, provided that the permeability and gas contents of the coal are sufficient to allow significant gas flow. Significant gas flows into virgin headings are indicative of medium- to high-fracture permeability and present potential for both effective pre-drainage and gas utilisation.

Coal permeability directly affects the time required to sufficiently drain the coal seam. The lower the coal's permeability, the more time is needed to drain gas to reduce coal seam gas content to a required average value. Alternately, the lower permeability coals require a greater number of boreholes needed to achieve the desired methane levels in advance of mining. The available time for degassing and the cost of the drilling operation determines the ultimate feasibility of pre-mine degasification under site-specific conditions.

Various mine pre-drainage techniques are in use globally. Rotary drilling is commonly employed for drilling underground in-seam holes of 100 m to 200 m. However, holes of 1,000 m or more can be installed using underground directional drilling techniques, thereby increasing the efficiency of degassing. Furthermore, where mines are not too deep, extensive in-seam drilling and degassing can be carried out from the surface. Surface to in-seam directional drilling techniques have proved effective in pre-draining coal seams with a permeability range of approximately 0.5 millidarcy (mD) to 10 mD (i.e., approximately $5 \times 10^{-4} (\mu\text{m})^2$ to $10^{-2} (\mu\text{m})^2$) and even less. A combination of pre- and post-drainage using advanced, surface-based directional drilling techniques is planned in Australia, where total mine emissions can reach 8,000 l/s and longwall capture efficiencies of 80% are required (Moreby, 2009). Australian and U.S. experience (Von Schonfeldt, 2008) has shown that where surface to in-seam drilling is possible, the technique is superior to underground in-seam drilling because the borehole can be drilled well in advance of mining and therefore less likely to have the time allowed for effective drainage to be shortened by coal production activities (Black & Aziz, 2009). Figure 5.1 shows a potential drilling configuration that can be used to drain gas from coal before mining commences. In this schematic, two minable seams will be drained by first drilling a pilot well from which two lateral well bores are drilled into each of the seams. After the lateral wells are placed, another vertical well is drilled to intersect the laterals. Water and gas is produced from the vertical well and the pilot well is shut-in or abandoned. Figure 5.2 depicts post-mining drainage alternatives, but cross-measure boreholes and directionally or guided boreholes (in advance of mining) can be drilled in much the same configuration.

Figure 5.1 Schematic of Pre-Mine Drainage from Lateral Wells Drilled from the Surface

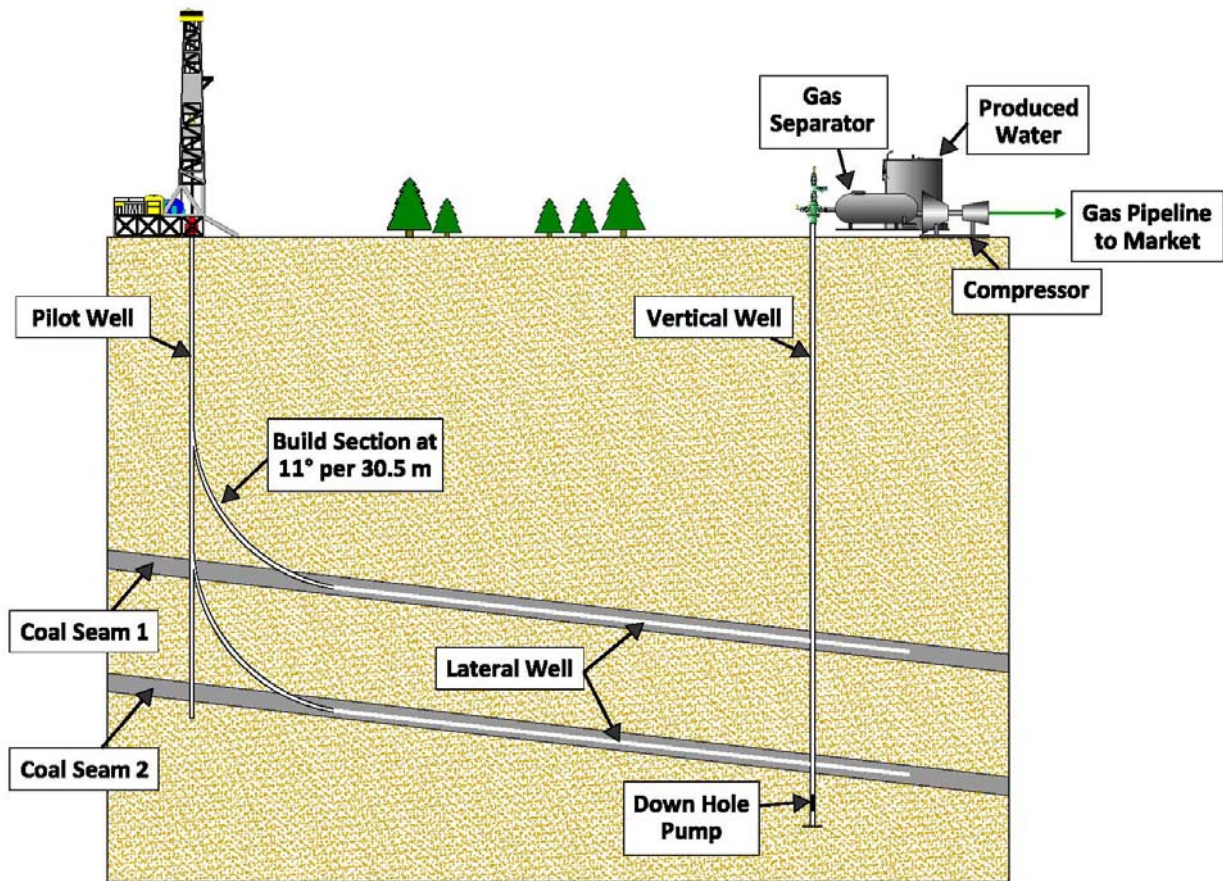

(Courtesy of Raven Ridge Resources, Incorporated)

For shallow to medium-depth seams of high permeability (> 10 mD), hydraulically stimulated vertical wells drilled from the surface, also known as “frac wells,” have traditionally been applied to drain methane in advance of mining with good success, mainly in the United States. Hydro-fracturing or “fracking” has been used without compromising the safety of coal mines located in the Eastern United States, but caution should be used to determine if the technique is suitable for the specific geologic and mining conditions before it is employed.

The advantage of surface-based techniques is that drainage can be carried out independently of the mining operation, but the feasibility of an application depends on the depth of drilling, the integrity and permeability of the coal, and any limitations imposed by topography or surface buildings.

5.4 Post-Drainage Basics

In many of the world's coal basins, the low permeability of the coal seams (< 0.1 mD) and geologic characteristics of the seams (e.g., soft coals, faulting) are not conducive to pre-drainage techniques. As shallow reserves are mined out and mining moves to deeper seams in many countries, this may become

even more common. Any effective methane drainage in these coal basins relies on the fracturing and permeability enhancement caused by the caving of the strata as the coal is progressively mined.

Post-drainage methods involve intercepting methane released by mining disturbance before it can enter a mine airway and obtaining access to the zone of disturbance above, and also sometimes below, the worked seam.

Where there are one or more coal seams above or below the worked seam, emissions from these sources can significantly exceed emissions from the worked seam depending primarily on net coal thickness and gas content of these seams. Therefore, much higher volume gas flows can often be drained using post-drainage techniques compared to pre-drainage methods. Ensuring sufficiently high gas concentrations for efficient drainage and safe utilisation requires careful design and management of these systems. The greater the incidence of coal in the roof and floor of a gassy worked coal seam, the more important post-drainage becomes.


Figure 5.2 provides a synoptic view of drainage techniques that can be employed to drain gas from a longwall panel after coal has been extracted. In this diagram, three modes of drilling are shown:

- Guided horizontal boreholes: Drilled from a roadway or specially prepared drilling galleries. Boreholes can be drilled into surrounding strata that will relax as the working face retreats. The relaxing strata produces gas into zones acting as pathways and collection points for gas as it migrates upward. This illustration depicts boreholes that have been drilled above the panel into roof strata and beneath the floor into underlying floor strata.
- Cross-measure boreholes: Shown here as drilled in various configurations and designed to drain roof and floor rock strata as it relaxes in response to de-stressing caused by coal extraction. One set is drilled in advance of the retreating longwall face into the overlying roof rock behind the coalface. This type tends to perform better than those shown drilled before mining takes place, as they invariably suffer damage as the face passes strata after the longwall face has already formed. Generally, cross-measure boreholes drilled behind the longwall face achieve higher capture efficiencies and maintain higher gas purities than those drilled in front of the coal face. It is, however, necessary to maintain the entry behind the face by building pack walls, and in some cases to also form a seal against the goaf. Seals on the goaf side of the open roadway behind the face serve to enhance roadway support and isolate the goaf from air ingress to minimise the spontaneous combustion risk.
- Surface goaf boreholes: Drilled from the surface into the upper limits of the goaf, usually in advance of mining. These boreholes are drilled so that the lower portion of the hole drains gas that migrates upward from underlying relaxed and broken strata. The holes are usually operated under a partial vacuum. Care must be taken that the suction is not excessive as to draw in large amounts of mine air and dilute the methane purity below 30%. When the purity drops below 25% to 30%, these goaf holes must be shut in.

In addition to the techniques shown in Figure 5.2, driving gas drainage galleries above or below longwall workings and draining gas from previous workings, which lie within the disturbed zone, are effective means of reducing emissions of methane into active mine workings.

Post-mining gas drainage strategy may employ one or all of these drainage techniques. Choice and configuration of a post-mining drainage programme will depend on the required gas drainage efficiency, mining and geologic conditions, suitability of the technique for targeting the zone responsible for the greatest gas flows, and cost. Figure 5.2 was drawn to depict post-mining drainage alternatives, but cross-measure boreholes and directionally or guided boreholes can be drilled in much the same configuration to produce gas in developed panels before longwall production begins.

Figure 5.2 Various Post-Drainage Drilling Methods

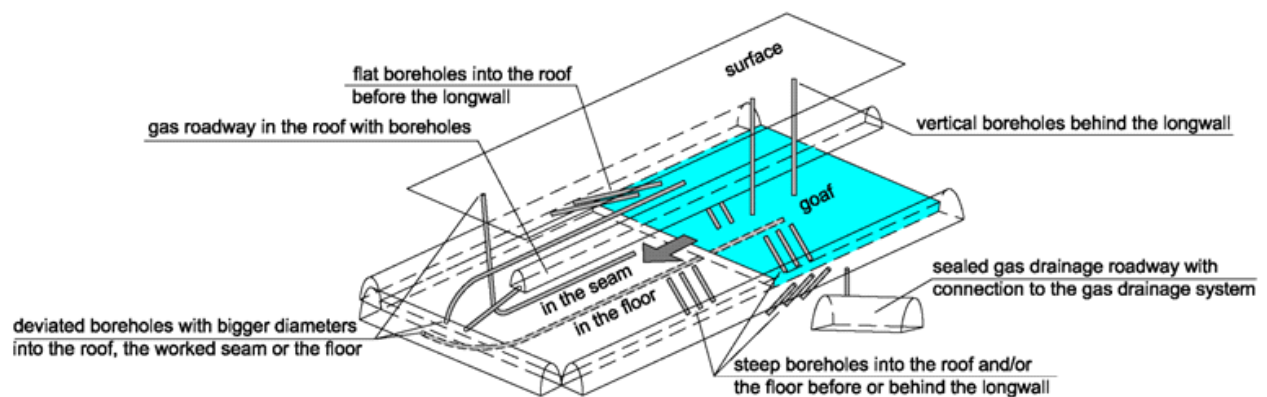

(Courtesy of DMT GmbH & Co. KG)

Some gas drainage methods, such as laying drainage pipes in the goaf through barriers constructed behind the face, allow excessive volumes of air to be drawn into the system to dilute the methane sometimes within the explosive range. This and other types of methane drainage systems, which only capture CMM at low purity, should be avoided—they are highly inefficient and encourage the accumulation of explosive gas mixtures in the goaf at the return end of retreating longwalls. These drainage methods are also generally ineffective in preventing the formation and migration of methane layers.

Deterioration of drainage performance leads to rapid increases in airway methane concentrations (assuming that the total ventilation air flow into the mine remains constant). Gas drainage systems therefore require continuous, detailed monitoring and management.

5.5 Design Considerations for Methane Drainage Systems

The capacity of a methane drainage system should be designed to accommodate the maximum expected captured gas mixture (methane and air) flows from all sources in the mine, including working faces, exhausted faces from which equipment is removed, and abandoned (closed or sealed) areas.

The expected volume of produced methane gas can be estimated using a methane prediction method. The highest flow that has to be transported through the piping network is given by the highest expected captured gas flow with the lowest methane concentrations (purity) likely to arise during normal operations. The resulting flow rate should be within the system's planned capacity when all the pumps are operating.

Gas quality is a design feature of the gas drainage system, not an inherent or natural characteristic. Gas purity of less than 30% methane in air should be considered unacceptable for both safety and efficiency reasons. The maintenance of gas purity in underground drainage systems depends on the quality of borehole sealing, including proper installation of standpipes, the systematic regulation of individual boreholes, and the suction pressure applied at the surface extraction plant. Increasing suction in an effort to increase gas flow will introduce more air and hence reduce the gas purity. Conversely, reducing suction will reduce the total mixture flow but improve gas purity. Most importantly, suction and flow at the surface plant should only be adjusted with a full knowledge of the underground status and while maintaining communication with the longwall ventilation supervisors.

When planning, implementing, and managing a methane drainage system, the following factors should be taken into account:

- Safety of access for drilling, monitoring, and regulation.
- Ground stability and necessary support systems to stabilize boreholes.
- Gas drainage borehole configurations, with consideration given to differences between the expected performance of roof and floor post-drainage boreholes.
- Drainage capacity, pipe diameters, extraction pump, and infrastructure requirements.
- Location, installation, and commissioning of the drainage pipe network.
- Water traps and dewatering facilities.
- Operational control and maintenance of the drainage system and infrastructure.
- Monitoring of boreholes, pipe networks, and the surface extraction plant.
- Protection of gas drainage pipes from crushing behind longwall retreat faces.

5.6 *Underground Gas Pipeline Infrastructure*

Suitable materials should be used for gas drainage pipe-work infrastructure. Steel, glass-reinforced plastic (GRP), and polyethylene (PE) gas drainage pipe is available.

GRP pipelines are relatively brittle and should not be used in coal-production districts; however, their ease of handling and installation, compared with steel pipe, makes them the preferred material for the main trunk lines.

Where space is restricted and the line might be vulnerable to physical damage (e.g., from roadway deformation or free-steered vehicles), steel pipe should be used and connected using proprietary flexible joints to allow movement.

PE pipe is used in some countries, but high temperature fusion of these pipe joints or segments underground should be avoided. Safety regulators in some countries allow this practice in well-ventilated areas under supervision of qualified mine safety personnel, whereas in other countries, it is deemed unacceptable. In addition, a conductive medium is necessary to reduce risk of static discharge.

Regardless of material choice and positioning, underground pipe systems are vulnerable to damage even in the most regulated mines. The principal potential source of damage is mining equipment, including mineral conveyors, rope haulage systems, locomotives and their loads, and blasting activities. There is also the potential for damage from strata movement and roof collapse. The drainage system should therefore be designed and operated with the premise that there is a finite risk of integrity failure.

5.7 *Monitoring of Gas Drainage Systems*

Manual or remote monitoring systems should be used to determine the effectiveness of the gas drainage system. Monitoring quality depends on the sensors' reliability, positioning, maintenance, calibration, and use.

Measurements are needed at individual boreholes, in gas drainage pipe-work, and at the surface methane extraction plant that houses the pumps that draw the drained gas out of the mine. Parameters to be monitored include mixture flow, gas concentration, gauge pressure, and temperature. Barometric pressure should also be recorded to facilitate standardization of flow data. In some cases, gas being drained or emitted into the mine workings may contain heavier gaseous hydrocarbons, such as ethane or propane. These hydrocarbon species can distort the response from conventional infrared-based gas detection systems, and cause inaccurate measurement of methane. Care should be taken to select monitoring equipment that is capable of correcting for non-methane hydrocarbons so that accurate measurements are ensured.

Monitoring should be used to assess the actual performance of the installed system against the original design concept.

Chapter 6. Methane Utilisation and Abatement

Key Messages

Underground coal mines are one of the largest sources of anthropogenic methane emissions, but these emissions can be substantially reduced through implementation of best practices. Methane has a GWP more than 20 times higher than carbon dioxide, the most important GHG globally.

Much of the methane produced from underground mines can be used or destroyed by the mining industry. Options include exploitation of the drained gas, flaring excess drained gas, and use or abatement of mine VAM. With the right technical and market conditions, the ultimate goal should be near zero methane emissions.

In the rush to exploit CMM, necessary safety and engineering standards have sometimes been neglected, creating new hazards at coal mines. Any increase in underground risk should be avoided in planning methane utilisation.

6.1 Coal Mine Methane and Climate Change Mitigation


Reduction of methane emissions is an international priority in which coal mines can play an important role. Methane accounts for 14% of global anthropogenic GHG emissions, and coal mines constitute 6% of methane emissions or about 400 MtCO₂e annually (EPA, 2006a; IPCC, 2007; Methane to Markets, 2008). Global CMM emissions are small compared to other coal-related GHG emission sources (e.g., carbon dioxide from coal combustion), but they are not insignificant. More importantly, the technologies to recover and utilise CMM are commercially available and proven, making CMM use an attractive near- and medium-term GHG abatement solution for the coal industry.

6.2 Mine Methane as an Energy Resource

Methane capture and use can add significant value to the mining operation. Captured CMM can be directly used to supply or generate energy, harnessing the value of a natural resource. In turn, this can deliver economic returns for the mine through energy sales or cost savings. Moreover, methane utilisation adds intrinsic value by generating capital that can be reinvested in mine safety equipment and operations.

Existing technology is able to optimise energy recovery and virtually eliminate a substantial percentage of methane emissions from underground coal mining (Figure 6.1). Good gas drainage standards and practices will yield gas of stable and usable quality, and will facilitate application of the lowest cost utilisation opportunities. Due to mining variations, gas supply will fluctuate and utilisation equipment will occasionally fail or need to be stopped for maintenance. The unused gas can then be flared to minimise emissions. Methane that cannot be captured and used is diluted in ventilation air and emitted to the atmosphere as VAM. Technologies to reduce VAM emissions have been in development for many years. Generally, it is technically feasible to oxidize VAM at concentrations above 0.20%, and there are several commercial projects now in operation around the world.

Figure 6.1 Optimising Energy Recovery with Near-Zero Methane Emissions Mining

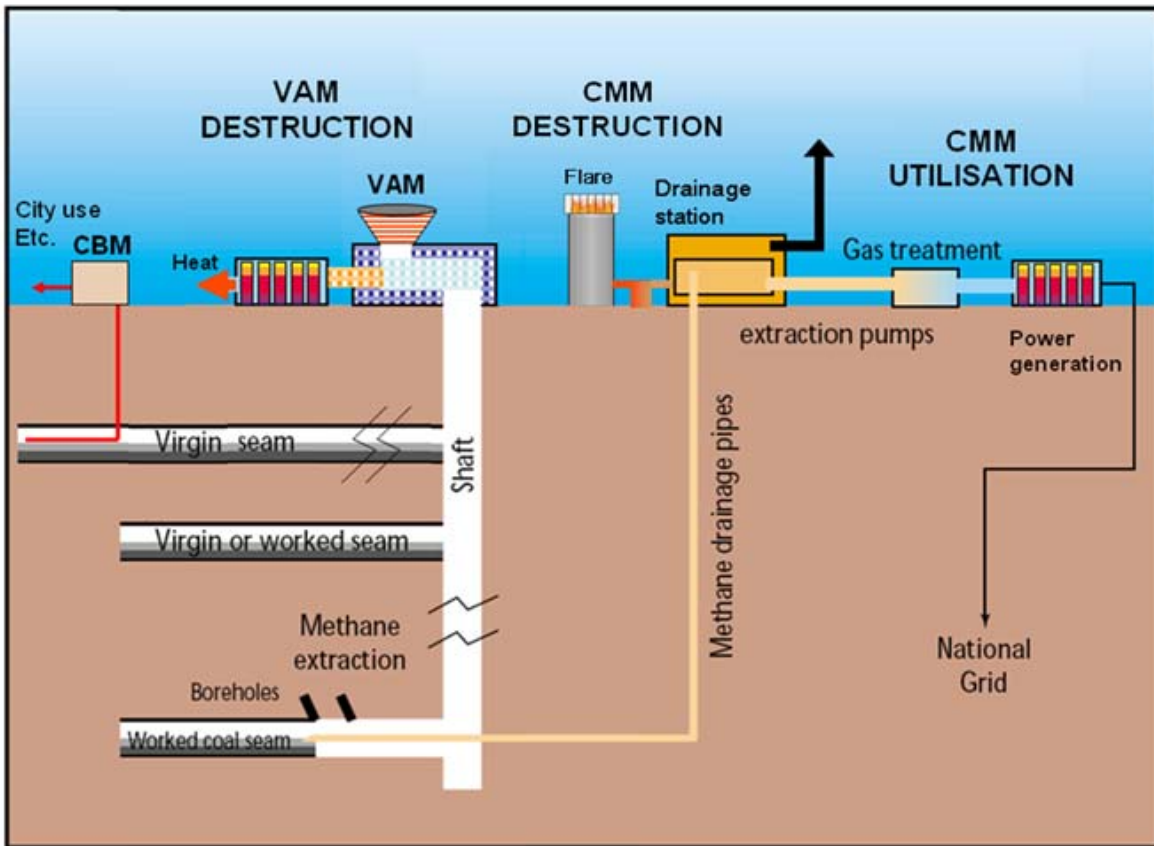

(Courtesy of Sindicatum Carbon Capital)


Safety must always remain the highest priority in managing methane at underground coal mines. In the rush to exploit CMM, necessary safety and engineering standards have sometimes been neglected, creating new hazards at coal mines. In planning methane utilisation, any increase in underground risk should be avoided.

6.3 Use Options

Potential utilisation of CMM in the range of 30% to 100% methane exists in a large variety of applications including: 1) use as fuel in steel furnaces, kilns, and boilers; 2) in internal combustion (IC) engines or turbines for power generation; 3) for injection to natural gas pipelines; 4) as feedstock in the fertilizer industry; or 5) as vehicle fuel (LNG or CNG). For offsite uses of gas, especially for civil customers, storage tanks are often constructed to ensure peak demands can be met and to buffer supply in the event of an interruption to gas extraction. The high cost, land use, visual impact, and risks associated with storing large volumes of flammable gas mixture are generally avoided at mine-based CMM power plants, many of which operate successfully on a live mine connection.

The Methane to Markets Partnership (www.methanetomarkets.org) has identified more than 240 current, planned, and former CMM/VAM projects at active and abandoned mines worldwide. Figure 6.2 summarizes the distribution of CMM/VAM project types, with power, natural gas pipeline, and boilers dominating. Taken together, the projects entail 1,263 megawatt (MW) of electricity generating capacity and 156 MW of thermal energy capability, deliver 1,582 million m³ per year of natural gas sales, and yield annual emission reductions equivalent to 7 MtCO₂e (Methane to Markets, 2009).

Figure 6.2 Distribution of CMM Projects Worldwide

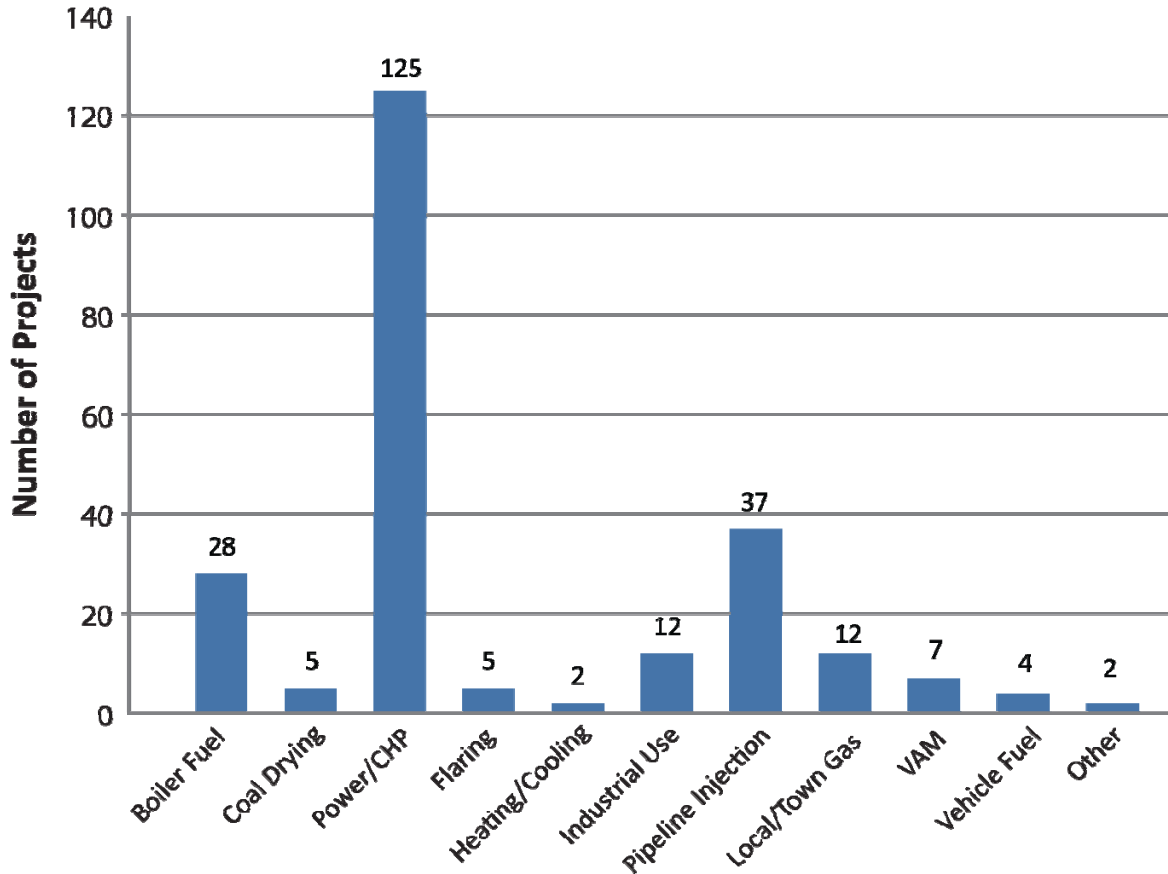

(Source: Methane to Markets Partnership, 2009)

To date, the majority of projects making use of captured methane have occurred in Australia, China, Czech Republic, Germany, Poland, the Russian Federation, Ukraine, the United Kingdom, and the United States. With the advent of carbon markets, there is growing value in some countries to the reduction of carbon emissions and resulting creation of carbon credits or other environmental commodities in addition to the energy commodities generated by such projects (see Section 7). This has spurred increased project activity in many countries, notably China, while also underpinning growth in project types solely dependent on carbon credits as the principal revenue source (e.g., flaring and VAM abatement).

6.4 Abatement and Utilisation of Drained Methane

Utilisation of drained methane is dependent on the quantity and quality of the gas produced. Historically, methane concentrations of at least 30% were required. In recent years, combustion engines have begun appearing in the marketplace that are capable of using mine gas with methane concentrations less than 30%. This guidance differentiates the use of medium/high-concentration and low-concentration (< 30%) drained methane, because transportation of low-concentration gas is extremely dangerous and should be avoided.

6.4.1 Medium- to High-Methane Concentration CMM

Technologies in this category generally require a fairly consistent flow and quality of methane from drainage systems with a minimum methane concentration of 30% for transport safety reasons. Some applications are only commercially feasible with high-quality, pre-mining drained gas. There is no “one best use.” Each project should be evaluated on its own merits based on the quality and quantity of gas produced and the market, mining, operating, and legal conditions at each mine. For example, feed-in tariffs have been a major driver for CMM use in Germany, encouraging CMM-based power production. Many U.S. mines have access to a well-developed, natural gas transportation system with favourable natural gas pricing leading to a number of natural gas pipeline sales projects. Table 6.1 compares the most common end uses of drained gas, briefly highlighting their advantages and disadvantages. For more information, users are encouraged to visit leading sources of information, including the Methane to Markets Partnership web site (www.methanetomarkets.org).

Table 6.1 Comparison of CMM Uses

Use	Applications	Advantages	Disadvantages
Power generation	Gas-engine generators producing power for mine use or export to the grid	<ul style="list-style-type: none"> • Proven technology • Waste heat recovery for heating mine buildings, miners baths, and shaft heating and cooling 	<ul style="list-style-type: none"> • Interruptible and variable output; therefore, may not be conducive for the electric grid • Regular maintenance requires commitment of mine operator • High capital costs at initial stage of project
High-quality pipeline gas	Purified high-quality CMM	<ul style="list-style-type: none"> • Natural gas equivalent • Profitable where gas prices strong • Good option where strong pipeline infrastructure exists 	<ul style="list-style-type: none"> • Pipeline purity standards are high and purification is costly • Only feasible for high-quality, pre-drained CMM or treated CMM • Requires reasonable access to pipeline

Use	Applications	Advantages	Disadvantages
Medium-quality “town” or industrial gas	>30% methane for local residential, district heating and industrial use such as firing kilns	<ul style="list-style-type: none"> • Low cost fuel source • Localized benefits • May require minimal or no gas cleanup 	<ul style="list-style-type: none"> • Cost of distribution system and maintenance • Variable quality and supply • Costly gas holders needed to manage peak demands
Chemical feedstock	High-quality gas for the manufacture of carbon black, formaldehyde, synthetic fuels and di-methyl ether (DME)	<ul style="list-style-type: none"> • A use for stranded high-quality CMM supplies 	<ul style="list-style-type: none"> • High processing cost • No CDM potential when carbon can be liberated
Mine site	Heating, cooking, boilers, coal fines drying, miner’s residences	<ul style="list-style-type: none"> • Displaces coal use • Clean, low-cost energy source 	<ul style="list-style-type: none"> • May be less economically beneficial to use on-site than off-site
Vehicles	Purified high-quality, pre-drained gas and CBM for CNG and LNG	<ul style="list-style-type: none"> • Market access for stranded gas supplies • Vehicle fuel prices are very high 	<ul style="list-style-type: none"> • Processing, storage, handling, and transport costs • Purification standards are very high

Note: All projects may be eligible to generate carbon credits, renewable energy credits, or feed-in tariffs where the projects meet required criteria.

6.4.2 Low-Concentration Drained Methane

Unsuitable gas drainage methods and poor implementation standards result in low drainage capture efficiencies and excessive ingress of air producing flows of low-concentration gas, sometimes in the explosive range. This guidance strongly recommends against attempting to transport or use gas in the explosive range to avoid a catastrophic explosion that will endanger the lives of mine workers, cause structural damage to the mine, and result in substantial costs to the mining operation.

6.4.3 Purification Technologies for Dilute Methane from Drainage Systems

In some instances, it may be advantageous to improve the quality of CMM, especially methane from goaf areas. The initial focus should be on improving underground methane drainage standards to avoid the high costs associated with purifying drained gas. This improves the quality of the gas and enhances safety within the mine.

A second option is to upgrade the gas quality. Systems to upgrade gas quality can be expensive. Prior to installing such a system, great care should be taken to assess the options and weigh the costs and benefits against the CMM project objectives. If gas upgrading is the desired approach, the simplest solution is to blend lower-quality goaf gas with high-quality, pre-mine drainage to achieve an optimal mix. The other option is rid the mine gas of contaminants (oxygen, nitrogen, carbon dioxide, and carbon monoxide, but also hydrogen sulphide), using one of three basic technologies: 1) pressure swing adsorption (PSA); 2) molecular sieve adsorption (MSA), a variant of PSA; and 3) cryogenic separation.

- Pressure Swing Adsorption: In most PSA nitrogen rejection systems, wide-pore carbon molecular sieves preferentially adsorb methane during each pressurization cycle. The process recycles methane-rich gas so that the methane proportion increases with each cycle. PSA recovers up to 95% of available methane and may operate on a continuous basis with minimal on-site attention.
- Molecular Sieve Adsorption: MSA employs a PSA process with an adjustable molecular sieve. It allows the pore size to be adjusted to 0.1 angstrom. The process becomes uneconomical with an inert gas content of more than 35%.
- Cryogenic Separation: The cryogenic process—a standard, economic solution for upgrading below-specification gas from natural gas fields—uses a series of heat exchangers to liquefy the high-pressure feed gas stream. Cryogenic plants have the highest methane recovery rate of any of the purification technologies with about 98%, but are very expensive and thus more appropriate for large-scale projects.

The U.S. EPA publication, *Upgrading Drained Coal Mine Methane to Pipeline Quality: A Report on the Commercial Status of System Suppliers (EPA-430-R-08-004)*, contains additional information on upgrading drained CMM. <http://epa.gov/cmop/docs/red24.pdf>.

6.4.4 Flaring

Flaring of CMM is an abatement option that may be attractive if CMM utilisation is not feasible. Ideally, each utilisation plant should be equipped with a flaring facility in case of a breakdown or when scheduled maintenance requires that the plant be temporarily shut down, and during the early mine development stage when methane production has not yet reached commercially viable levels. This action will minimise methane emissions into the atmosphere and thereby protect the environment whenever utilisation is not available.

The coal industry and mine regulatory authorities in some countries have opposed flaring at mines over concerns that the flame could propagate back down through the drainage system into the mine, causing an explosion. At the very least, safe flaring requires rigorous design incorporating flame and detonation arrestors, seals, sensors, and other safety devices. CMM flares have operated successfully in a number of countries including Australia, China, and the United Kingdom. Conceptually, the safety risk is no different from that of a CMM boiler, a well-established application.

Flares may be either open “candlestick” flares or enclosed (ground) flares. Enclosed flares may cost substantially more than open flares, but the destruction efficiency will consistently be greater. In “perfect conditions,” the efficiencies are almost equal and can approach 98% to 99%, but the efficiency of open flares fall dramatically when wind and other factors are introduced (University of Alberta, 2004). The Clean Development Mechanism (CDM) Executive Board, for example, has established default values of 90% for enclosed flares and 50% for open flares (CDM Executive Board, 2009). Actual efficiencies can be measured and used for enclosed flares. A final consideration is that enclosed flares have greater aesthetic appeal as the flame is not visible and combustion pollutants can be better managed.

6.5 Abatement or Utilisation of Low-Concentration Ventilation Air Methane (VAM)

Underground mines are by far the largest source of fugitive methane emissions in the coal sector, and it is estimated that 70% or more of all global coal mining-related emissions are from underground ventilation air. VAM is exhausted into the atmosphere usually in methane concentrations of less than 1%.

In recent years, technologies have been developed that can destroy very low concentration methane in mine ventilation air by thermal oxidation. The primary purpose of these technologies is the reduction of GHG emissions. Some of these technologies may be combined with a heat recovery system for use at the mine or district heating, or to run steam turbines for power generation.

The two oxidation technologies available in the market today are Regenerative Thermal Oxidisers (RTO), also known as Thermal Flow Reversal Reactors (TFRR), and the Regenerative Catalytic Oxidisers (RCO), also known by the term Catalytic Flow Reversal Reactor (CFRR). Both use a flow reversal process to maintain the reactor core temperature and differ only in the RCO's use of a catalyst in the oxidation process. Prior to VAM application, these technologies have seen widespread use for pollution control in commercial and manufacturing operations, specifically to oxidise volatile organics, odours, and other air pollutants. Commercial-scale VAM RTOs have been installed and demonstrated for methane mitigation in mines in Australia, China, and the United States. VAM energy recovery has been successfully demonstrated in Australia, using VAM as combustion air in IC engines, and using RTOs to convert VAM to electricity at a mine mouth power plant. A VAM RCO has been proven at full-scale demonstration in a test unit.

Current VAM technologies are generally not able to process methane concentrations below 0.2% without use of additional fuel, but research efforts are underway to lower the concentration threshold because VAM concentrations at many mines worldwide fall below 0.2%. Operations that use VAM to generate power may need to optimise the inflow concentrations and increase the VAM concentration inlet to the oxidation device. One method that has been employed is enriching (spiking) the gas with methane from other sources such as goaf or pre-drainage gas. If enrichment is being considered, the use of low-quality drained gas (<30%) should not be used due to the explosion hazard. Use of higher concentration gas (> 30%) could divert gas from lower-cost CMM power generation, and this should be evaluated as part of the project feasibility.

It is necessary to ensure that the RTOs/RCOs and the infrastructure necessary to transport the mine return air to the reactors do not create additional back pressure on the mine fan, minimise parasitic power consumption to the extent practicable, and contain methane analyzers and other safety equipment (e.g., flame arrestors, bypass systems).

Other VAM technologies under development include the catalytic monolith reactor (CMR), lean burning turbines reported to use VAM at concentrations of 1.5% and lower, and rotary kilns that mix VAM with waste coal fines (Su, 2006).

At this time, the commercial feasibility of VAM technologies where VAM is a primary fuel source is dependent on revenue provided by carbon credits. VAM projects are reported to deliver positive rates of return at carbon prices starting as low as US \$5 to US \$10/tCO₂e.

6.6 Methane Monitoring

The efficiency and safety of methane utilisation can be considerably enhanced if the actual methane concentration in the extracted gas can be accurately measured.

Drained gas transported for conversion to energy, or flaring, can be more safely transported if accurate data is available regarding the true methane content in the gas. The benefits extend beyond safety, however, to enhance the marketability of the methane or commodities produced from the methane utilisation or abatement. For example, gas engines have a narrow band of acceptance of methane concentration, and an assured and consistent gas flow will increase the efficiency of the engines while reducing operating and maintenance (O&M) costs. Methane delivered to a natural gas pipeline must meet very stringent specifications or face possible rejection—or even penalties—from the pipeline operator.

For VAM projects, it is essential to accurately measure the ventilation flows to assess fluctuations in VAM concentrations and total VAM flows prior to project design. Once operating, a thorough monitoring regime will provide operational data, but the monitoring programme is especially critical for accurate measurement of emission reductions. This may require a much different testing regime from that normally employed in the mining operation where the methane monitoring is performed for safety reasons and ventilation flows are measured for optimisation of ventilation. For example, many GHG protocols require continuous emissions monitoring of the VAM flow and continuous or regular sampling from methane analyzers.

Chapter 7. Cost and Economic Issues

Key Message

There is a strong business case for installing and operating high-efficiency gas drainage systems and utilising the captured gas. There are a wide range of potential CMM end uses that have been commercially and profitably employed globally. The high costs associated with purifying drained gas to improve the methane concentration for a particular end use can often be avoided by improving underground methane drainage practices.

7.1 The Business Case for Methane Drainage

In modern coal mines, a sustained, high level of coal production is necessary to obtain an acceptable financial return from investment. Increasing coal extraction rates often results in higher rates of methane emissions. Sustainable coal production should not be limited by an inability to prevent gas concentrations in the mine from exceeding statutory safe limits, nor compromised by uncontrolled gas-related incidents. Infringement of gas safety standards can lead to fines or to explosions that endanger human life. Any loss of human life is unacceptable and needs to be avoided. Aside from the direct effects on the worker's dependants, any fatal accident will harm a company and its workforce far beyond the monetary aspects that result from penal liability, compensation, production stoppage, and possibly resulting contractual fines. The cost of a single fatal accident to a large mining operation could range from US \$2 million to more than US \$8 million through lost production, legal costs, compensation, and punitive fines. In some countries, a serious accident in one mine can lead to suspension of coal mining over a wide area for a period of a few weeks until the authorities have completed inspections and initiated a response to prevent recurrences.

The costs of methane drainage are an intrinsic part of the total mining production and operating costs. Therefore, strong justification exists for investing in effective gas extraction to ensure that longwalls meet production targets legally and safely. The financial impact can be illustrated. A modern high-production longwall working a moderately thick seam (e.g., around 3 m) can produce 2 million to 4 million tonnes per annum (Mtpa) in good geological conditions. If the coal price is US \$40/t, then any gas emission-related constraint that slows or stops production for 10% of the time would cost the mining company US \$8 million to US \$16 million per year in lost revenues.

Once a gas drainage system is in place, investing in additional gas capture provides an opportunity for savings or additional revenue, through a potential reduction in ventilation power cost or an increase in coal production potential.

7.2 Comparative Costs of Methane Drainage

Methane drainage system costs depend on a number of factors (e.g., equipment, service, labour, surface access, land acquisition) and vary substantially from country to country. These cost differences are compounded by variations due to geological and mining conditions within individual countries and therefore generalisation inevitably leads to wide ranges. Table 7.1 presents a generalised, relative cost

comparison of gas drainage methods per tonne of coal produced (2009 prices). The basis for comparison is the drainage of a notional, gassy, longwall panel 2 kilometre (km) long and 250 m wide at 600 m depth with a 3-m thick seam with extraction rates of 2.0 Mtpa to 0.5 Mtpa benchmarked using data from China and Australia.

Table 7.1 Relative Costs per Tonne of Coal Produced in 2009 in US \$ of Various Gas Drainage Methods

Method	Basic Technology	Major Cost Items	Major Cost Variables	Estimated Cost US \$/t
Underground pre-drainage	Directional long boreholes, in-seam along panel length	Specialist drillers and equipment	Borehole diameter and length	0.4 to 3.2
	Rotary-drilled boreholes across the panel	Rotary drilling rig and equipment	Borehole diameter and length	0.6 to 4.0
Surface pre-drainage	Vertical well with conventional fracture stimulation	Contract drilling, casing and fracking services; Sealing on abandonment	Borehole depth and number of seams to be completed	1.2 to 9.6
	Surface to in-seam well with multiple laterals	Contract drilling, casing and specialised, steered down-hole drilling services; Sealing on abandonment	Borehole depth and total length of in-seam laterals drilled; Cost can escalate rapidly where drilling difficulties arise	1.0 to 8.0
Underground post-drainage	Cross-measure boreholes (from existing roadways)	Rotary drilling rig and equipment	Borehole diameter and length	0.1 to 1.6
	Drainage galleries	Additional roadway development	Distance above/below worked seam and roadway dimension	0.3 to 11.2
	Super-adjacent (or sub-adjacent) boreholes or guided horizontal boreholes	Specialist drillers and steered down-hole drilling equipment	Drilling difficulty for the radius bend	0.5 to 4.0
Surface post-drainage	Goaf boreholes	Contract drilling and casing; Sealing on abandonment	Depth	1.4 to 15.2

Note: The values above are highly generalised and do not account for variation in costs for surface methods with depth.

The drainage method selected must be suitable for the mining and geological situation. For example, underground cross-measures drilled into the strata above a worked seam with few roof seams will not provide effective gas control. Costs for surface-based methods increase with depth of working so as depth increases, underground methods will become increasingly financially attractive.

In very gassy mines, a combination of methods may be required before high coal-production rates can be safely achieved. The costs of drainage systems increase with geological complexity. There should be sufficient redundancy in the system to allow for failure of one borehole, or drainage gallery, without compromising the safety of underground mining. An estimated typical operational cost range for extracting CMM from underground on a pure methane basis is US \$0.06/m³ to US \$0.24/m³.


7.3 Methane Utilisation Economics

Utilisation of drained gas for power generation requires additional investment, but will generate a revenue stream or reduce power costs to the mine. Financial issues to consider when investing in a power generation project are the variability of gas supply and quality, opportunity cost, and source of financing.

Investment costs per megawatt of electricity capacity (MW_e) for a CMM co-generation power plant (all equipment including gas conditioning) is about US \$1.0 million to US \$1.5 million for international standard high-efficiency generators (2008). O&M costs (all-in) in terms of electricity produced average around US \$0.02 to US \$0.025/kilowatt-hour (kWh) for the entire life cycle of the co-generation plant (2008).

The financial performance of a CMM power plant depends on the availability of gas, the reliability of the equipment (and hence, operating hours), acceptance of power by the user or national grid, and the power revenue received or savings to the mine through using the CMM-fueled power. As gas is drained for safety and coal production reasons in any case, the marginal cost of drainage is excluded from the analysis. In some instances, additional costs may be involved in enhancing gas flow and quality. A combination of good project design, use of proven equipment, a robust O&M scheme, and real-time performance monitoring are critical for success. Figure 7.1 shows a screen shot of exemplary monitoring software.

Figure 7.1 CMM Power Generation and Abatement: Real-time Performance Monitoring Showing the Flow Diagram and Performance Parameters of CMM Used in Three Gas Engines and One Flare

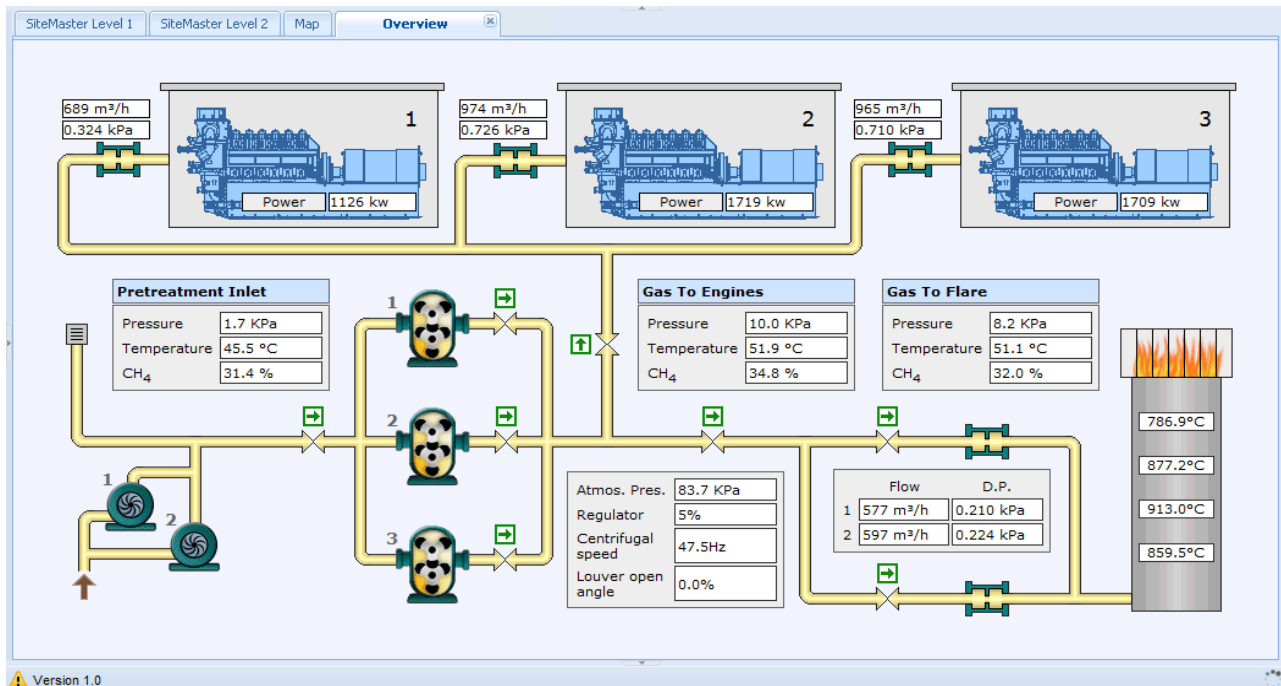


(Courtesy of Formac Electronics and Sindicatum Carbon Capital)

When sizing a CMM-fired power plant, the variability of gas flow and purity associated with normal mining activity must be taken into account, and if necessary, drainage standards must be raised to ensure the gas is of safe and legal quality for utilisation. Historical data can be used to determine the potential generation capacity at a pre-determined gas availability (e.g., 85%) with flaring to destroy unused gas (Figure 7.2). As demonstrated by many oversized—and hence, underperforming—CMM-fired power plants, this exercise is important because the economics of CMM-fired power plants demand highest operating hours in excess of a minimum of 7,500 hours per annum. Therefore, the gas engine capacity should not be designed to utilise also peak load gas supply but rather be designed for a safe base load in terms of gas availability. Peaks in both gas quantity and (towards lower) quality should ideally be destroyed by flaring to maximise environmental benefits.

As gas capture is progressively improved, further engines can be added; a pure methane flow of 4 m³/min will support about 1 MW_e.

Figure 7.2 Methane Flow and Purity Fluctuations of Drained CMM Showing the Optimised Capacity and Use of Engines and Flare

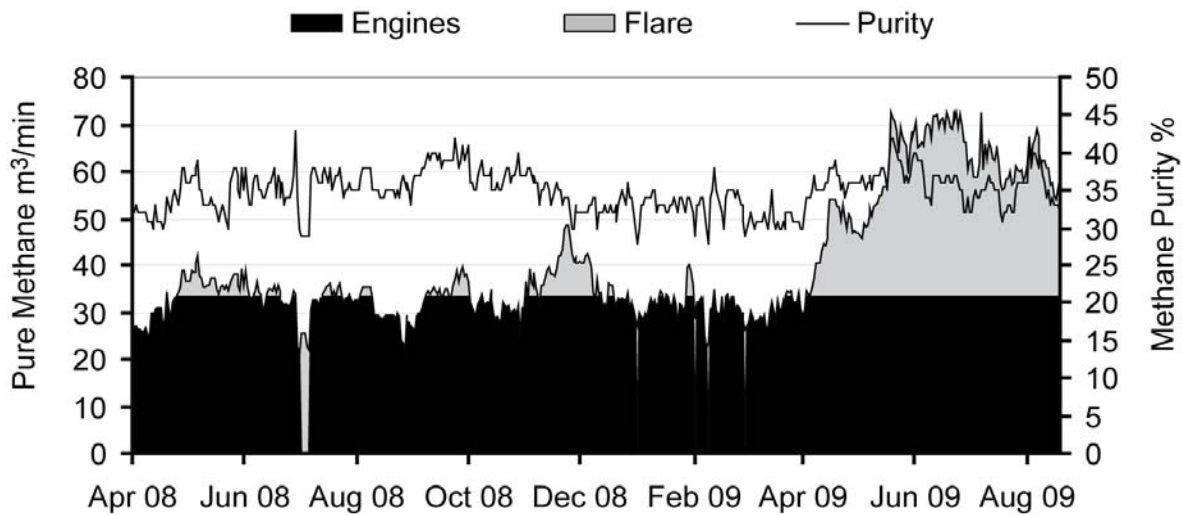

(Courtesy of Sindicatum Carbon Capital)

Besides the utilisation option of CMM-fired power generation, a wide range of other options exist, such as use of CMM as town gas, in boilers to produce heat, and as feedstock for chemicals as discussed in Chapter 6. In those cases, the economics depend largely on the individual circumstances and a more generalised view as with power generation is difficult.

As the majority of methane emissions from coal mines are in the form of VAM, some principals of VAM utilisation are warranted. VAM oxidation releases heat, which can be used to produce steam and generate electricity. VAM oxidation units with a capacity of 35 normal cubic metres per second (Nm³/s) ventilation air containing 0.5% methane could generate about 1.3 MW_e. In order to achieve constant power output, a

source of drained CMM is needed to stabilize the VAM concentration and a relatively high VAM concentration is required to optimise performance. The capital cost per unit of power produced is more than twice that of conventional CMM power generation, and there is an “environmental opportunity cost” with respect to emissions abatement four to five times larger than could have been achieved with a similar level of investment. At present energy prices and in the absence of high feed-in tariffs, VAM power generation is not commercially feasible without securing a longer-term flow of carbon revenues. In addition, improvement of gas drainage can increase CMM power generation at a much lower cost, thus reducing VAM emissions.

The economics of any use of CMM or VAM for power generation highly depends on the electricity price achieved for a particular project and the value of emission reduction credits or other incentives.

7.4 Carbon Financing and Other Incentives

Emission reduction credits provide an additional financing option in some countries to supplement conventional project financing through bank loans or private equity investment. There are a variety of emissions crediting regimes such as the flexible CDM and Joint Implementation (JI) under the Kyoto Protocol, as well as voluntary regimes that are the foundation of such additional financing option.

Other incentives to help finance methane utilisation schemes include grants, tax credits, green investment schemes (GIS) and feed-in tariffs (e.g., in Germany and Czech Republic). In the absence of these incentives, carbon finance becomes the preferred choice to trigger the implementation of CMM and VAM utilisation schemes.

The basis of the leverage effect carbon financing can bring is that one unit of emission reduction is equivalent to one tonne of carbon dioxide. The amount of 66.4 m³ of methane is approximately equivalent to one tonne of carbon dioxide. Calculations have to take account of the gains by destroying methane, which has a GHG emission effect more than 20 times that of carbon dioxide, and the release of 2.75 tCO₂ emitted per tonne of methane combusted. As a rule of thumb, 1 MW of CMM-fired electricity production capacity installed, using 250 m³/h of pure methane emissions can result in an annual reduction of 30,000 tCO₂ emissions. Depending on operating hours and efficiency of the system, more than seven times the emission reduction that a 1-MW_e wind turbine would produce.

Before choosing to take advantage of carbon finance leveraging and/or other incentives, issues to consider include the crediting mechanism, process and transaction costs, time, complexity, local rules, and price uncertainty of emission reduction credits, some of which are worth elaborating on further by using the CDM and JI as examples for illustration.

The CDM implemented under the Kyoto Protocol allows developed countries to develop and claim CERs from application of approved methodologies in developing (non-Annex 1) countries. JI facilitates projects in non-CDM countries and/or countries with emission caps under the Kyoto Protocol. There are various voluntary standards for accrediting emission reductions. VER projects are not subject to the rigorous and time-consuming validation and verification processes imposed on CDM and JI projects under the United

Nations Framework Convention for Climate Change (UNFCCC); however, VERs face a smaller market and considerably lower prices.

A robust proof of “additionality” is required for a project to qualify for the CDM and JI. An additional project is one that will reduce man-made GHG emissions below those that would have occurred in the absence of the project; for instance, compared with the business-as-usual case. Investment costs for CMM co-generation plants in terms of emission reduction potential during 10 years of operations are approximately US \$3 to US \$5/tCO₂ equivalent avoided. CER/ERU generation involves CDM/JI project preparation, validation, verification, and service costs, together with the methane utilisation/destruction equipment and its maintenance. When all the costs are taken into account, including cost of capital, financial risk, and specialist CDM/JI services, the total can amount to US \$10/CER or ERU.


For example, a medium-level gassy mine (specific emission of 10 m³/t) earns, in gross terms, 0.042 CER/t of coal produced, while a very gassy mine (specific emission of 40 m³/t) yields 0.168 CER/t of coal.¹⁰ This calculation assumes that 40% of the total gas is extracted, of which 80% is utilised. This level of performance would be expected as a minimum for projects where best practice methods and standards are applied and where there are no major geological or mining constraints. The actual value of the CERs or ERUs depends on the market and the timing of sale.

Investment in utilisation at a medium-level gassy (i.e., 10 m³/t) 4 Mtpa mine, with an emission reduction purchase agreement (ERPA) price of US \$12/tCO₂e (40% gas capture and 80% availability), would yield about US \$2 million per year from CERs or ERUs, plus revenue or cost savings from power generation or gas sales.¹¹ The captured methane, assuming a stable gas supply, would be sufficient to generate 5 MW_e (2.5 million m³ per year of pure methane generates about 1 MW_e), and the power revenue at roughly US \$0.05/kWh and 7,000 operating hours per year would amount to US \$1.75 million. The total revenue from emission reductions and power would therefore equal US \$3.75 million. In this instance, the carbon credits almost double the project revenue as documented in Figure 7.3, showing the modeled revenues in US \$/t of coal produced deriving from electricity and CER sales as a function of the mine’s specific emissions methane in m³ (pure)/t.

¹⁰ Destruction only, but there can also be a fuel switch benefit from displaced coal-fired power generation.

¹¹ No allowance has been made for CER taxation.

Figure 7.3 Dual Revenues from CMM Power Generation: 40% Gas Captured, 80% Used

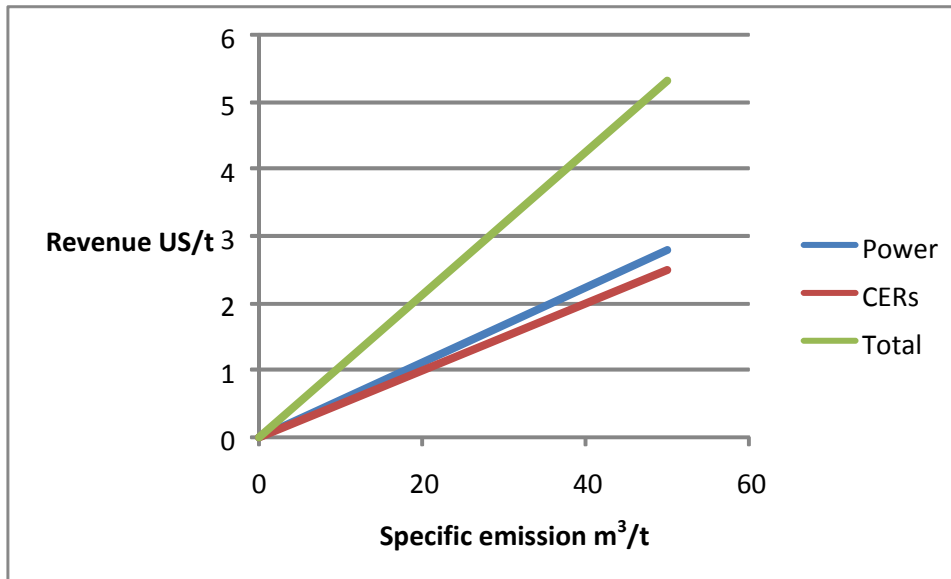

Substantially higher returns could potentially be earned at higher gas mines. A very gassy mine (40 m³/t specific emission) producing 4 Mtpa would generate revenue of US \$8 million from emission reductions and have a 20-MW_e generation potential that could yield US \$9 million. Total potential gross revenue is therefore US \$17 million.¹²

Financial returns on emission reduction projects are only possible if emission reductions can be proven by providing accurate measurements of methane flow and purity. Methane drainage and utilisation projects are already—and are likely to become even more—under scrutiny to provide reliable proof of emission reductions. The complexity of monitoring and measurements are often underestimated and this can lead to safety risks and loss of revenues.

7.5 Opportunity Cost of Utilisation

The average capital cost of a methane utilisation plant depends on scale and type of the chosen utilisation process. As a first estimate of capital costs for utilisation, a figure of about US \$1/t of coal production capacity can reasonably be assumed. In comparison, marginal costs to extend coal-production capacity in China, for instance, is estimated to be around US \$12/t (where licenses, approvals, resources, geology, mining conditions, underground and surface infrastructure, and market allow). Investment of US \$1/t of coal production capacity into mining instead of gas use would therefore result in a marginal increase in coal production capacity of 1/12, or 0.083 tonnes. So, for example, the capacity of a 4-Mtpa mine would be increased to 1.083 x 4 = 4.332 Mtpa by using the funds needed for gas utilisation for an increase in coal production capacity. At a coal price of US \$30/t, the additional annual revenue would be approximately US \$10 million. The opportunity cost of US \$2.50/t is high and therefore, investment decisions at most mines are likely to favour expansion in coal production capacity rather than CMM power generation. Where

¹² Again, no allowance has been made for CER taxation.

additional revenues in the form of emission reductions credits are available, for example, power generation starts to emerge as an economically viable alternative for coal mines with specific emissions of above 20 m³/t (see Figure 7.3 above). A corollary of this argument is that CMM power generation is additional. As coal price increases, CMM power generation becomes increasingly unattractive.

The picture changes with third-party investment in utilisation, supported by carbon financing—an attractive proposition for a mine—as the opportunity cost is obviated and the formerly unused methane creates additional value.

7.6 Environmental Costs

At present, most mining companies consider gas drainage to be a mining cost, while costs incurred for gas utilisation or environmental emissions mitigation are classified as an additional investment cost. As climate change mitigation and clean energy recovery become an intrinsic part of the value chain, however, mine operators might need to take a more holistic view of these factors. Mine owners may in the future be required to raise gas drainage performance beyond the safety needs of the mines to meet environmental protection targets.

Under a “business as usual” scenario, estimations for China show that the cost of internalising the methane emission impact of coal mining would be approximately US \$12/t of coal production (ESMAP, 2007). No country has attempted to impose such a cost in this magnitude as yet, but the dollar figure provides an indication of the potential cost to a coal mine that fails to minimise environmental emissions. Russia, for example, does already impose a fine on methane emissions from coal mines but far lower than the above figure.

Chapter 8. Conclusions and Summary for Policymakers

The world has relied upon coal for a significant portion of its primary energy production since the Industrial Revolution. Major emerging, industrialised, and transitional economies—and hence the global economy—will continue to benefit from and be dependent on coal energy resources for the foreseeable future. Today, coal supplies 25% of global primary energy, 40% of global electricity, and almost 70% of the world’s steel and aluminum. The International Energy Agency (IEA) projects that emerging economies will see energy demand grow 93% by 2030, driven largely by demand growth in China and India, and coal is expected to be the leading fuel to meet this growing demand (IEA, 2009).

Coal extraction and effective methane management will become increasingly challenging as shallow reserves are exhausted and deeper and more gassy seams are mined. At the same time, societies are increasingly demanding and expecting better environmental outcomes and safer working conditions from the industry.

Ideally, modern coal mining companies recognise the benefits of adopting a holistic gas management system that constructively integrates underground gas control, methane utilisation, and reductions in harmful emissions. Similarly, from policy and regulatory perspectives, a comprehensive approach to CMM management will reap multiple benefits. Establishing and enforcing regulations for safe gas extraction, transport, and utilisation encourages higher methane drainage standards as well as increased clean energy production and greater mine methane emission reductions.

Experience in industrialised countries shows that investment in good gas drainage practices results in less mine downtime due to gassy mine conditions, safer mining environments, and the opportunity to utilise more gas and reduce mine methane emissions. This guidance document should be considered a starting point for devising strategies and developing programmes to support the necessary safety and practice improvements to increase mine safety while dramatically reducing mine methane emissions.

The key principles of this document are as follows:

1. ***There is tremendous global industry knowledge about and experience with managing methane explosion risks.*** Global application of the accumulated, currently-available industry knowledge and practices about methane occurrence, prediction, control, and management could significantly reduce explosion risks resulting from methane in coal mines.
2. ***Regardless of constraints, mine worker safety is paramount and should not be compromised.*** Safe working conditions in gassy mine environments cannot be achieved solely through legislation or even the most advanced technology. Rather, rational and effective management systems, management organisation, and management practices are fundamental to safe operations. Other critical elements of mine safety are appropriate education and training for both management and the workforce, and encouraging worker input as work safety practices are adopted.
3. ***A risk assessment approach to minimising explosion risks should be combined with strong enforcement of robust ventilation and utilisation safety regulations.*** This approach will lead to

improved gas drainage quantities and qualities. Methane gas flows into coal mines under normal, steady-state conditions are generally predictable. Unusual emission and outburst events are not easily predicted, but the conditions under which they can occur are reasonably well-known. Detailed methods for reducing risks under these conditions have been developed and should be applied wherever significant risks are identified. In such circumstances, safe working conditions depend on the rigor of implementation and monitoring of gas control methods. The importance of not only installing underground monitoring for operational mine safety reasons but gathering and using the data for safety planning cannot be overstated.

4. ***Mine ventilation systems are critical components of an overall system to effectively remove methane from mine workings.*** A mine ventilation system is designed to achieve three objectives: 1) deliver breathable fresh air to the workers, 2) control mine air temperature, and 3) effectively dilute or remove hazardous gases and airborne respirable dust.
5. ***Improvements to methane drainage systems can often provide a more rapid and cost-effective solution to mine gas problems than simply increasing the mine's air supply.*** Practical gas drainage problems at coal mines can generally be resolved by applying existing knowledge and techniques. Introducing new or novel technologies should only be considered after application of good practices, and only if existing techniques have failed to provide a satisfactory solution. Methane drainage system performance can be improved through proper installation, maintenance, regular monitoring, and implementation of systematic drilling plans.
6. ***Transporting methane-air mixtures at concentrations in or near the explosive range in coal mines is a dangerous practice and should be prohibited.*** Methane is an explosive gas in concentration ranges of 5% to 15% methane in air. As a general rule of thumb, a safety factor of at least 2.5 from the low end and 2.0 from the high end of this range should be strictly observed.
7. ***Underground coal mines are a significant source of anthropogenic methane emissions (about 6% of human-related global methane), but these emissions can be substantially reduced through implementation of best practices.*** Methane has a GWP more than 20 times higher than carbon dioxide, the most important GHG globally. Much of the methane produced from underground mines can be recovered and used productively or destroyed (mitigating its global warming effect by converting it to carbon dioxide). Options include energy recovery of the drained gas, flaring excess drained gas, and use or abatement of VAM. With the right technical and market conditions, the ultimate goal should be near-zero methane emissions.
8. ***There is a strong business case for installing and operating high-efficiency gas drainage systems and utilising the captured gas.*** There are a wide range of potential CMM end uses that have been commercially and profitably employed globally. The high costs associated with purifying drained gas to improve the methane concentration for a particular end use can often be avoided by improving underground methane drainage practices.

Chapter 9. Case Studies

The following case studies provide readers with seven examples where the best practices discussed in this guidance document have been implemented at operating mines around the world. Case Studies 1-3 discuss the assessment, planning, and methane management practices implemented at three longwall mines to address methane control problems. Case Study 4 addresses reduction of explosion risks at room-and-pillar mines. In Case Study 5, methane capture and utilisation for power generation is examined. Case Study 6 and 7 focus on VAM abatement and utilisation.

The case studies are necessarily brief and are intended to only highlight the key points in each case


Case Study 1: Achieving Planned Coal Production from a Gassy, Retreat Longwall with Severe Strata Stress and a Spontaneous Combustion Prone Coal Seam – United Kingdom

Initial Conditions: 980 m working depth, 50 m³/t specific emissions from a 2-m high retreat longwall required to produce 1 Mtpa, high spontaneous combustion risk coal, ultra-low permeability coal, severe horizontal stresses at the coalface and floor heave in the longwall access roadways—one intake and one return.

Gas Control Problems: Pre-drainage was not feasible due to the low permeability of the coal, and cross-measure boreholes angled above the longwall front of the face were disrupted by the high stresses; hence, gas capture and purity was too low. The high spontaneous combustion risk and a large pillar size requirement for stability precluded use of multi-entry or bleeder road systems.

Solution: The requisite production was achieved using the available 30 m³/s of ventilation air by drilling cross-measure boreholes behind the face in a specially supported and ventilated “back-return” (Figure 9.1). The optimum drilling pattern was found to be a series of up-holes, at right angles to the longwall roadway, angled upwards at 55° to the seam plane, and 7.5 m apart. Down-holes were drilled 100 m apart to minimise floor emission risks.

Figure 9.1 Back-Return System

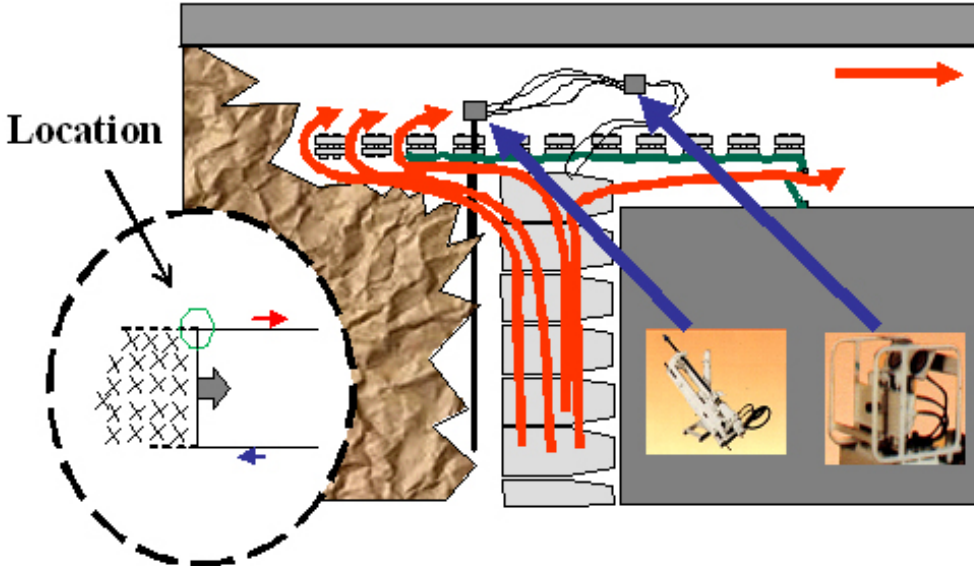


(Courtesy of Green Gas International)

Two drainage collection pipes were installed in parallel. Boreholes were progressively connected to one of the pipes until the gas quality declined; that pipe was then regulated to prevent excessive dilution of the gas and boreholes were subsequently connected to the other collection pipe. This “leapfrog” process was continued, allowing at least eight boreholes to remain connected to the gas drainage system at any time

(see Figure 9.2). The coarse regulation was sufficient to optimise gas quality and quantity and a capture rate of 67% was achieved without requiring personnel to venture into the hazardous goaf to adjust individual boreholes.

Figure 9.2 “Leapfrog” System

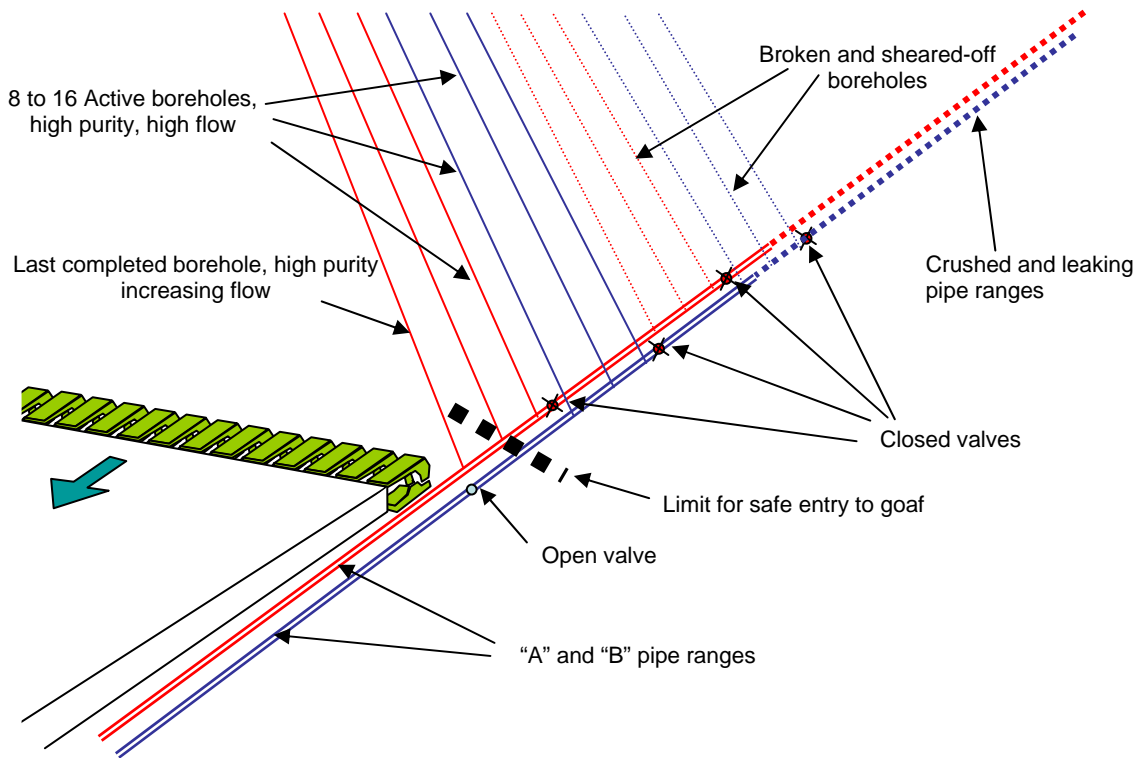

(Courtesy of Green Gas International)

The rate of retreat of the longwall was very rapid, and the space available for drilling operations was limited, so each borehole had to be drilled, the standpipe installed and sealed, and connected to the drainage collection pipe within an approximately 10-hour cycle. This was achieved using a small, portable and powerful drilling machine (Figure 9.3) powered from the hydraulic circuit of the longwall powered roof supports to obviate the need for electricity.

Figure 9.3 Cross-Measure Drilling Rig



(Courtesy of EDECO Ltd.)


Case Study 2: High Performance Longwall Operations in Areas with High Gas Emissions – Germany

Initial Conditions: In a seam of 1.5-m thickness, a longwall with a length of 300 m, and a planned production of 4,000 tonnes per day (t/d), and a face advance rate of about 50 m/week. The overburden depth is 1,200 m, the seam near horizontal, and there are no previous workings to partially degas the coal seams. Gas predictions indicated likely specific gas emissions of 25 m³/t from the roof, 3 m³/t from the worked seam, and 8 m³/t from the floor (in total 36 m³/t). The coal was known to be prone to spontaneous combustion.

Gas Control Problem: The maximum methane flow that must be captured or diluted by ventilation to a safe concentration is 1.875 m³/s (112.5 m³/min). Pre-drainage was evaluated and determined to be ineffective. There were two main constraints. Firstly, a maximum permissible airflow of 25 m³/s across the longwall coalface could only dilute a maximum gas inflow of 0.37 m³/s (22.2 m³/min), despite a relaxation by the mining authority which raised the maximum permitted methane concentration from 1.0% to 1.5% (a reduction in factor of safety from 5.0 to 3.3). The latter change was conditional on enhanced monitoring and gas drainage. It is important that such changes are only made on a site-specific basis and additional measures taken to ensure no significant increase in risk. The other constraint was the airway into which the district ventilation air was to discharge, in which a maximum of 1% methane is permitted.

Solution: A Y-ventilation system (Figure 9.4) was designed to introduce a further 50 m³/s of air and add to the 25 m³/s passing across the face, the combined flow passing behind the face diluting the methane emitted from the coalface and the goaf. The ventilation configuration allows cross-measure boreholes to be drilled, connected to the drainage system and individually monitored and regulated—generally cross-measure boreholes drilled behind the longwall face achieve higher captures and maintain higher gas purities than those drilled in front of the coal face. These drainage holes have a long lifetime and high effectiveness, and are expected to capture 70% of the roof gas and 40% of the floor gas.

Figure 9.4 Longwall with Y-shaped, Advanced Ventilation Design and Drainage Boreholes in the Roof and the Floor Behind the Longwall

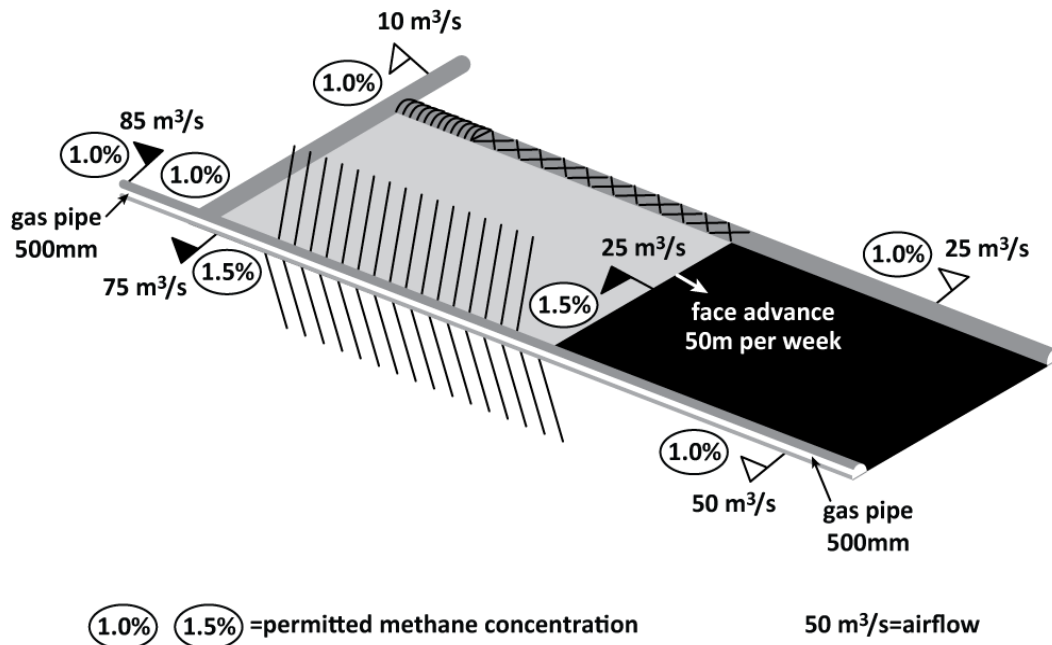

(Source: DMT GmbH & Co. KG)


Seals (pack wall) on the goaf side of the open roadway behind the face served to enhance roadway support and isolate the goaf from air ingress to minimise spontaneous combustion risk and creating methane concentrations in the explosive range.

The limiting concentration of 1% outbye of the return ultimately limited the coal production to 4,000 t/d, which was in accordance with the planned target. About 80,000 m³/d of pure methane could be sucked by the gas drainage system and utilised in a power station. Despite the severity of the mining conditions, the longwall was a success due to the advanced ventilation design and the highly effective gas drainage.

Case Study 3: High Performance Longwall Operations in Areas with High Gas Emissions – Australia

Initial Conditions: A new series of longwall blocks is located in a 2.8 m-high seam with methane contents ranging from 8 to 14 m³/t. Depth of cover is 250 m to 500 m with surface access generally unconstrained by surface features. In situ gas content must be reduced to or below 7.5 m³/t to satisfy the outburst prevention code and below the self-imposed limit for frictional ignition control of 5.75 m³/t using pre-drainage methods. There is a single floor seam and eight roof seams containing 10 m to 15 m of coal within the nominal caving zone. Longwall blocks are 300 m wide and up to 3.6 km in length (Figure 9.5), with a planned production rate of 110,000 tonnes per week.

Figure 9.5 Mine Layout Plan Showing Gas Drainage Systems

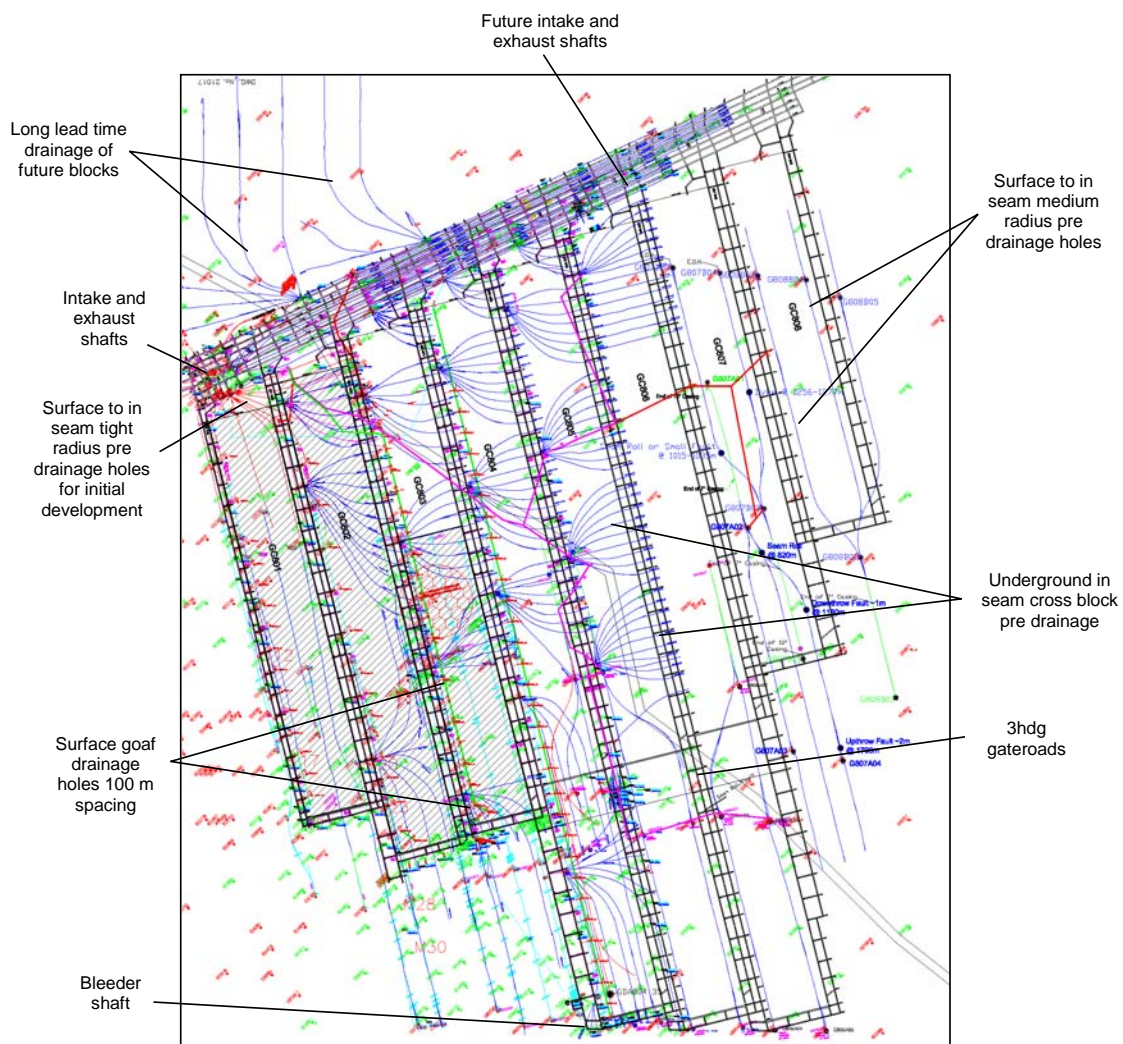

(Source: Moreby, 2009)

High potential gas emission values led the mine to develop three-heading gate roads on longwalls from the outset in order to provide a high volumetric capacity ventilation system for gas dilution. A three-heading

gate road allows substantially more air to be provided for gas dilution to the return end of a longwall face, without increasing face air velocities, compared with a conventional U-ventilated system. This is currently the only mine in Australia to employ three-heading gate roads.

Gas Control Problems: Gas emission predictions indicate likely specific emissions of 15 to 30 m³/t from coal seam sources. At planned production rates, this would equate to 3,500 to 7,000 l/s CH₄, generally increasing with depth. However, previous studies at an adjacent mine demonstrated substantial free gas which could significantly increase the total emission rates. Emissions from the first three longwalls were controllable within the existing design but higher than expected for the relatively shallow depths. Extrapolation to the deeper longwalls indicated feasibility stage predictions would be exceeded with emissions possibly reaching 9,500 l/s.

Solutions: Development phase outburst and frictional ignition limits are reached using a combination of surface to in-seam medium radius drilling (MRD) techniques supplemented with underground directional holes and compliance holes that are cored for gas content testing. The initial pit bottom area was pre-drained with tight radius drilling (TRD) techniques.

The original plan to employ three-heading gate roads was correct in providing a longwall ventilation circuit capacity of 100 to 120 m³/s (2,000 to 2,400 l/s CH₄ at the return limit of 2.0%). It is important to note that, following the Moura disaster of 1994 where 11 miners died, coal mine regulations, guidelines, and custom and practice in Queensland prevent mines from employing a full U.S.-style flood ventilation bleeder system. However, controlled bleed with due consideration to the location of potentially explosive mixtures and control of spontaneous combustion is possible.

In any event, the realistic dilution capacity of a bleeder system in these blocks is well below total longwall gas emission rates and alternative strategies are required. To date, the mine has successfully employed conventional surface to goaf drainage holes (300 millimetre diameter at 100 m spacing located on the tailgate return side) to reduce the gas emission load on the ventilation system. This strategy has achieved an average 65% capture (goaf drainage plus ventilation) with peaks of about 80% at high gas stream purity (>90% CH₄).

The gas collection infrastructure is on the surface, using 450 millimetre diameter pipes, including that from vertical connections to underground directional holes. All surface gas streams from underground pre-drainage, surface MRD pre-drainage, and goaf holes are exhausted to a central pump station from where about 2,200 l/s of gas is discharged to 16 x 2.0 MW gas engines with the balance flared. The site policy is to avoid direct discharge of captured gas if at all possible.

Recognising that, in future blocks, gas emission to ventilation net of 65% goaf capture will still prove problematic for the ventilation system, the mine is now attempting to also pre-drain thicker roof target seams using approximately 2.0 km long holes drilled along longwall axes. These holes will serve initially as pre-drainage and after under-working as goaf drainage holes targeting close face gas emission. Conventional multiple seam completion frac wells may also be considered should additional pre-drainage be required above future deeper workings.

Case Study 4: Reducing Explosion Risk in Room-and-Pillar Mines – South Africa

Initial conditions: An increase in severity of explosions in very thick (4-6 m high), low-gas content (1 to 2 m³/t) coal seams being worked using mechanised room-and-pillar methods, in this particular mining region, required a regulatory and practical response to reduce risk. About 75% of explosions were initiated in or close to working face entries with the dominant source of ignition being frictional (Landman, 1992). The still significant number of explosions in non-face areas emphasised the difficulties of controlling methane in room-and-pillar mines using ventilation methods. Airflow in room-and-pillar workings differs from that in longwall workings due to the repeated abrupt expansions and contractions where longitudinal roadways intersect transverse cross-cuts. Airflow may be static in some of the cross-cuts in extensive workings.

The build-up of gases in high production sections with inadequate ventilation and transmission of flame in undetected roof layers of methane (Table 9.1) were considered significant risks which should be controllable (Creedy & Phillips, 1997).

Table 9.1 An Assessment of Ignition Risk from Methane Layering in Room -and-Pillar Mines

Potential Failure	Possible Causes of Failure	Preventative Measures
Failure to prevent an ignition	<ul style="list-style-type: none"> • Inadequate or unreliable auxiliary ventilation in headings. • Deficiencies in machine ventilation systems. • Worn picks, blocked sprays, low water pressure. 	<ul style="list-style-type: none"> • Use of suitably designed and protected equipment. • High standards of maintenance. • Effective monitoring.
Failure to exclude ignition sources	<ul style="list-style-type: none"> • Electrical power and frictional ignition sources associated with continuous miners. • Smoking and other illegal activities. 	<ul style="list-style-type: none"> • Strict training and supervision of staff. • Contraband searches on entry to the mine.
Failure to disperse methane layering	<ul style="list-style-type: none"> • Insufficient ventilation capacity. • Inadequate local ventilation arrangements. 	<ul style="list-style-type: none"> • Methane control procedures. • Availability of air movers and other suitable equipment.
Failure to detect methane layers	<ul style="list-style-type: none"> • Incorrect monitoring locations. • Lack of suitable monitoring equipment. • Inadequately trained staff. 	<ul style="list-style-type: none"> • Site specific monitoring programme. • Suitable monitoring probes, especially for high roadway sections. • Training.
Failure to prevent methane layering	<ul style="list-style-type: none"> • Ventilation quantities too low. • Unreliable ventilation. 	<ul style="list-style-type: none"> • Ventilation planning. • Locally enhanced roof ventilation.
Failure to prevent emission of methane	<ul style="list-style-type: none"> • Methane emissions are a natural consequence of underground coal working. 	<ul style="list-style-type: none"> • Methane drainage.

Gas control problems: Ventilation of working faces requires auxiliary ventilation drawing air from the last-through-road. The mined sections comprise an extensive chequer-board of roadways and pillars, all of which cannot be effectively ventilated due to the massive amounts of air required and the difficulty of distributing it evenly. To ensure main ventilation flows reach the working faces, these worked-out areas are closed off with temporary screens; gas can therefore accumulate in the enclosed areas behind the face.

In mines where accumulations of water and methane pressures were identified as a possible cause of roof falls, roof-bolted boreholes were interspersed with open, free-draining boreholes. Some emitted gas at low flow rates, which could form extensive methane layers, and would remain undetected unless probed close to roof level—difficult in the high roadways.

Solutions: Gas control where partial extraction mining methods are practised can be assisted by in-seam, pre-drainage; post-drainage is rarely required as roof and floor coal-bearing strata are not significantly disturbed. In low gas-content seams, pre-drainage is of little benefit. Gas drainage was therefore not a viable option for this region. A practical solution necessitated improving ventilation practice.

It is not practicable to ventilate worked-out sections to the same standard as working sections due to the finite supply of air available. Emphasis in these changed circumstances was therefore directed at the introduction of effective monitoring schedules involving gas detection in the roof and air velocity monitoring in the general body of room-and-pillar workings in which ventilation quantities have been reduced pending sealing-off.

The highest risk area was considered to be the working faces and a code of practice for ventilating mechanised sections was developed by the government regulator (Department of Mineral and Energy Affairs, 1994). A fundamental criterion was that flammable gas concentrations should be less than 1.4%, and in order to secure this the following measures were recommended:

- A minimum air velocity in the last-through-road of at least 1.0 m/s (many mines chose to install a continuous, remote velocity monitor).
- Use of effective auxiliary ventilation in headings (secondary ventilation).
- Regular measurement and recording of critical ventilation data.
- Inspections of gassy sections at intervals not exceeding one hour.
- Automatic electrical isolation of mechanical cutting if the secondary ventilation system ceases to operate.
- Special precautions when approaching emission risk zones associated with igneous intrusions and geological anomalies.
- Continuous gas monitoring in the heading being mined.

Case Study 5: Development of a CMM Power Co-Generation/Emission Abatement Scheme – China

Initial Conditions: A new surface gas extraction plant had been installed and completed in May 2007 at a remote 1,600 m mountain location above a coal mine with a coal production capacity of 5 Mtpa, a specific emission of 17.7 m³/t, and draining methane at an average pure flow of 22 m³/min. The overall mine methane capture efficiency was 15%, the remaining 85% being emitted with the ventilation air.

Gas Control Problems: Gas purity at the extraction plant was variable and sometimes less than the 30% minimum permitted for utilisation and gas capture efficiency. Drained gas quantities were expected to fluctuate due to variations in the longwall mining cycle and the phasing of workings in different seams; therefore, the CMM power plant capacity needed to be sized to ensure 85% availability to meet investment requirements. An aim of the project was to optimise energy recovery and minimise GHG emissions. An integrated engine and flare system was required—a first in China; therefore, technology transfer demands were expected to be high.

Solution: A team of local and international specialists in gas drainage and power and systems engineering were applied to the project to work with the mine staff to ensure gas delivery, scaling of project size, and plant integration and performance.

Methane purity was raised by improving the sealing and regulation of cross-measure boreholes. The gas capacity of the drainage infrastructure was increased, high-resistance flow monitoring devices were replaced, and a plan prepared for increasing gas capture. Intensive pre-drainage drilling on two future longwall panels provided enrichment gas and also supplemented flow eventually contributing 23% of the drained gas, the remainder coming from post-drainage, roof cross-measure boreholes. The latter were drilled ahead of the face and inevitably some suffered damage and performed badly once in the goaf. A demonstration borehole was drilled over the goaf behind the face, which performed well but the technique has not yet been adopted for local regulatory reasons, and this method of drainage has not been historically practiced in this region.

Phase 1 of the scheme involved installation of 5 MW_e with waste heat recovery for heating buildings and intake ventilation air in winter. A nominal 5,000 m³/hour flare was also installed. A specialist company was engaged to devise and install a remote performance monitoring system for the utilisation and destruction equipment.

Once gas capture had been demonstrably increased to more than 50 m³/min (pure), construction of Phase 2 was implemented in October 2009 to raise the power generation capacity to 12 MW_e.

Case Study 6: VAM – China

Abatement of VAM emissions, and generating hot water from the energy released in VAM oxidation.

Figure 9.6 VAM Abatement and Energy Recovery Implemented in China



(Courtesy of ZhengZhou Mining Group, MEGTEC Systems, and EcoCarbone)

Initial conditions: A large coal mine located in Henan Province, People’s Republic of China, with a coal production capacity of 1.5 Mtpa was emitting around 12 million m³ per year of methane. VAM accounted for 56% of emissions with the remaining 44% of methane removed through a drainage programme. VAM concentrations varied between 0.3% and 0.7%.

Gas control problems: Utilisation or abatement of VAM emissions had not been previously demonstrated in China because there was no incentive to undertake such projects absent carbon credits.

Solution: A functioning CDM market is now providing the financial driver to implement VAM abatement projects. The state-owned mining group worked with a CDM project developer and a leading technology supplier to design, commission, and operate a commercial VAM demonstration project utilising a single-bed flameless RTO. With the assistance of the project developer, this project was the first validated and registered VAM CDM project within the framework of the Kyoto Protocol.

The first project is intended as a commercial demonstration project, but the specific VAM technology utilised at the mine is modular in nature with the ability to group multiple units together as single operating installations. This will allow the mine to size up the project to process very large VAM volumes. Additional VAM units could also be deployed to other mines within the same mining group.

The VAM installation at the mine consists of a single RTO with a throughput capacity of 62,500 Nm³/hour (17 Nm³/s) which is 17% of the total shaft flow of 375,000 Nm³/s. The connection to the mine fan is indirect in nature so that if the VAM processing installation is stopped, all ventilation air goes to atmosphere. An important safety arrangement includes sufficient length of ductwork so that in case of emergency (e.g., if too high concentration is detected), there is time to operate a bypass damper allowing the flow to go through the bypass. The RTO is capable of self-sustained operation down to 0.2% methane,

and is thus capable of operating successfully within the range of VAM concentrations produced by the mine.

The project commenced operation in October 2008 and has operated with a destruction efficiency of 97%. CER production is dependent on the quantity of methane destroyed, and will likely be between 20,000 tonnes (0.3% CH₄) and 40,000 tonnes (0.6% CH₄) of carbon dioxide equivalent per year for the single unit. With flameless oxidation, the system does not generate nitrous oxide emissions. At times when methane concentration is below self-sustaining level of 0.2%, the system is closed down.

A significant amount of energy can be recovered from inside the RTO. The installation at the mine is generating hot water for miners' showers and for heating of nearby buildings. The heat recovery is achieved by the application of an air-to-water heat exchanger installed between the RTO and its exhaust stack, recovering the energy in the heated exhaust air. The table below compares amounts of energy that can be retrieved in the form of water at 70 degrees C and 150 degrees C, respectively, at various VAM concentrations.

Table 9.2 Amounts of Energy that Can be Retrieved from One VAM Cube Installation under Various VAM Concentrations

Result of Secondary Heat Exchange	At 0.3 % VAM	At 0.6 % VAM	At 0.9 % VAM
Water at 70 degrees C	1 MW	8 MW	15 MW
Water at 150 degrees C	– <i>Not possible</i> –	2 MW	10 MW

Case Study 7: VAM – Australia


Abatement of VAM emissions, and utilising the energy released in VAM oxidation to generate electricity.

Initial Conditions: VAM from a major colliery in New South Wales, Australia was being emitted to the atmosphere in concentrations around 0.9% CH₄. Also, drainage gas with a concentration exceeding 25% was being emitted to atmosphere near the evasée.

Gas Control Problems: Large-scale VAM utilisation or abatement had not been previously demonstrated anywhere in the world due to the nature of the emission with very large air flow and extremely dilute methane concentration. Small-scale VAM utilisation or abatement had been applied in a 12-month long demonstration from 2001 to 2002 at the Appin Colliery of BHP Billiton in Australia. There, a small-size RTO had been processing VAM and utilising the energy released to generate steam—demonstrating long-term capability of handling the natural changes in VAM concentrations and long-term efficient energy recovery.

Solution: Working with the manufacturer of the RTO used at the Appin Colliery, the mine applied four RTOs integrated into the steam cycle of a steam-based power plant, effectively using the RTOs as special furnaces capable of operating on the extremely dilute fuel of VAM (Figure 9.7). The mining company received substantial grant funding from government sources to implement the project.

Figure 9.7 VAM Abatement and Energy Recovery for the Generation of Electricity

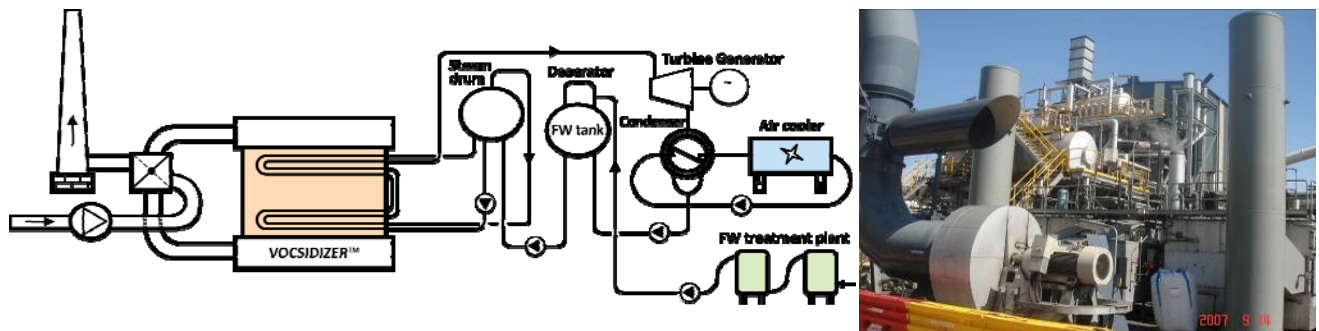

(Courtesy of MEGTEC Systems and Illawarra Coal Division of BHP Billiton)

The VAM-fuelled power plant is designed to process 250,000 Nm³/hour (150,000 standard cubic feet per minute or scfm) of ventilation air, corresponding to 20% of the total volume available in the mine evasée. The power plant design is based on the average VAM concentration of 0.9%. The RTOs are designed to handle variations in VAM concentrations, but if the steam turbine is to operate continuously on optimal speed, the energy in the ventilation air processed needs to be kept fairly stable at design point. For this reason, drainage gas of 25% or higher concentration is injected in the ventilation air flow prior to the process fans when VAM concentration is below the design point, which in the case at the subject mine is 0.9%.

The VAM-based power plant was in full operation by April 2007. Reported power plant availability in the first fiscal year (July 2007 to June 2008) was 96% including two planned maintenance shutdowns. By 2009,

the entire installation had generated over 500,000 carbon credits (traded within the local New South Wales trading scheme) and over 80,000 MWh of electricity.

For a successful VAM power plant:

- VAM concentration should be 0.7% or higher.
- The ventilation air volume available should be minimum 500,000 Nm³/hour (300,000 scfm).
- There should be drainage gas (minimum 25% concentration) available for injection into the ventilation air to compensate for shortfall in VAM concentration.
- Make up water should be available for cooling purposes.
- Location near electrical high voltage distribution grid for export of generated power.

Enrichment of VAM using drained methane is discussed in Section 6.3. Use of low-concentration methane should be avoided due to the risk of explosion.

Appendix 1. Comparisons of Gas Drainage Methods (adapted from Creedy, 2001)

Method	Description	Advantages	Disadvantages
Pre-drainage using vertical surface boreholes	<p>Involves fracturing one or a series of coal seams using high-pressure fluids pumped into a surface borehole. The fractures are held open by injecting a support material. Thus, gas and other fluids, able to flow through the coal seam, can enter the borehole without being limited by the resistance of the surrounding coal. Other methods of borehole completion have also been used such as simple cavity formation in high permeability coals.</p>	<ul style="list-style-type: none"> • Gas removed in advance of mining. • High purity gas of commercial value usually obtained. • Removal of gas independent of underground mining activities. • When hydro-fractured coal worked through, roof conditions not usually adversely affected. • Potential for converting to goaf wells after mine-through. • An opportunity to reduce emissions of methane to the atmosphere (reduction of greenhouse gas emissions) from coal mine-related sources. 	<ul style="list-style-type: none"> • Costly to complete. • Surface collection pipelines needed to facilitate utilisation. • Surface arrangements can be difficult in terms of ownership, access and visual intrusion. • Disposal of saline water which is sometimes produced. • Permeability may be too low in deep seams. • Drilling costs may be prohibitive for deep coal seams. • The coal seams must have high natural fracture permeability. • Difficult to co-ordinate with the mining plan. • Borehole completion design is a specialised task.
Pre-drainage using horizontal in-seam boreholes	<p>Long boreholes are drilled from underground roadways, or the base of shafts, into future areas of coal working, and gas is extracted over an extended period of time to reduce gas flows into development headings and future longwall coalfaces.</p>	<ul style="list-style-type: none"> • Gas removed in advance of mining. • High purity gas is produced suitable for utilisation. • Gas drainage independent of coal extraction operations. • Less costly than drilling vertical boreholes from the surface. • Applicable in deep mines subject to permeability of the coal. • Can reduce outburst risk in seams that are outburst prone. • Allows high development rates in gassy headings. • Removes gas that cannot be intercepted during post-drainage. 	<ul style="list-style-type: none"> • Boreholes need drilling in advance of mining. • The coal seam must have a moderate to high natural permeability to facilitate a significant reduction in seam gas content over a reasonable period of time. • Only reduces gas emission from the worked seam, not from adjacent seams disturbed by longwall mining. • Water emissions, borehole stability and directional control of drilling can be problematic in some seam locations. • Trained, underground team of firedamp drillers required.

Method	Description	Advantages	Disadvantages
Pre-drainage using surface to in-seam directional drilling	<p>A vertical or slant hole is drilled, from which directional drilling is initiated to enter the target seam or seams that are then followed for up to 1000m or more. Various complex in-seam drilling configurations are used to maximise performance and the most cost-effective are those which take account of strata stress direction.</p>	<ul style="list-style-type: none"> • Gas removed in advance of mining. • High-purity gas is produced suitable for utilisation. • Gas drainage independent of coal extraction operations. • More effective gas recovery than vertical frac wells. • Potential to re-use holes in seams above the workings for post drainage. • Drilling location flexible so not constrained by surface features. 	<ul style="list-style-type: none"> • High cost. • Not all coal seams are drillable. • Requires dewatering arrangements to remain effective. • Moderate coal permeability required. • Hole failure not easily rectified. • Specialist drilling equipment and skills required.
Precautionary pre-drainage using short holes in the roof of headings	<p>Short, vertical boreholes are drilled into roof strata in headings to control firedamp emissions from discrete fractures in sandstone roof strata. The gas may flow from a coal seam above and in contact with the fractured strata or it may occur naturally in the sandstone. Low-angle boreholes are sometimes drilled in the roof ahead of the face to release the gas in advance of mining to reducing frictional ignition risks in mechanised headings.</p>	<ul style="list-style-type: none"> • Low-cost method for reducing frictional ignition risks and controlling firedamp emissions. 	<ul style="list-style-type: none"> • Low gas flows. • Firedamp drainage system connections if considered necessary.

Method	Description	Advantages	Disadvantages
Post-drainage using cross-measure boreholes	<p>Boreholes are drilled at an angle above or below the goaf from the return airway of a longwall face and connected to a firedamp extraction system. In some retreat longwall mines, better drainage performance has been obtained from boreholes drilled behind the face compared with those pre-drilled in advance of the coalface. Access behind retreat faces is, however, sometimes difficult to maintain.</p>	<ul style="list-style-type: none"> • High captures possible on advancing longwall coalfaces. • Practicable for deep coal seam workings. • Short drilling distance to primary gas source. • Gas can be extracted and piped to a common, fixed surface location for commercial exploitation or use on the mine site. • Effective in low-permeability coal seams. • Floor boreholes can reduce the risk of sudden emissions of gas in susceptible workings. • Flexible and easily modified drilling pattern. • Least costly of the gas drainage methods. 	<ul style="list-style-type: none"> • High capture efficiencies difficult to sustain on retreat faces. • For maximum effectiveness, need to be drilled behind the face on retreat longwalls. • The productive life of boreholes is generally short. • Gas of medium to low purity is obtained due to ventilation air being drawn into the gas extraction system through mining-induced breaks in the strata. • Trained, underground drilling team required. • Underground pipeline infrastructure needed to the surface or to a safe discharge location in a return roadway.
Post-drainage using surface goaf boreholes	<p>A venting borehole is drilled and cased to within a short distance of the seam to be worked. Casing in the bottom, productive length of the borehole is usually slotted. Sometimes a borehole is drilled and cased to 30 m above the seam and then a smaller diameter open hole drilled through the worked seam horizon before or after the coalface has passed. A safe and reliable method of placing the borehole involves drilling to intersect the worked seam and then grouting the bottom 30 m. Boreholes are generally located towards the return airway side of a longwall.</p>	<ul style="list-style-type: none"> • Gas drainage operations independent of underground operations. • Capable of venting substantial firedamp flows from longwall goafs. • Well-proven, cost-effective method at shallow to moderate depths. • Moderately high-purity gas often obtainable. The productive life can extend to several months. • Can respond to changes in the mining plan. 	<ul style="list-style-type: none"> • Costly for deep coal seams. • Risk of water inflow where major aquifers overlie the worked coal seam. • No direct gas drainage of seams in the floor of the workings. • Goaf boreholes cannot be operated until coalface has passed some distance beyond the borehole to prevent ventilation leakage to the surface. • Collection of gas for exploitation requires costly surface pipeline infrastructure. • Only applicable where there are no surface access constraints. • May tap and vent more gas than would be released into underground workings.

Method	Description	Advantages	Disadvantages
Post-drainage using directionally drilled horizontal long holes above or below the worked seam	A number of boreholes are drilled using directional drilling techniques in a competent horizon at say 20 m to 30 m above, or below, the worked seam for the full length of a projected longwall panel. If no drilling site is available at the appropriate horizon, the borehole is steered to the requisite level from the mined horizon.	<ul style="list-style-type: none"> • May be usable in a pre-drainage mode before mining. • Potentially higher capture efficiency than with cross-measures boreholes drilled from the mined seam. • Gas drainage activities separate from coal production activities. • High-purity gas can be obtained. • Captures gas from close to initial release sites near the line of the coalface. 	<ul style="list-style-type: none"> • Directional drilling is relatively costly. • Problematic in swelling rocks and soft coals. • Repair of collapsed or damaged boreholes difficult. • Inflexible to changes in mining operations. • Reliant on the accuracy and speed of drilling to ensure a satisfactory system is in place before coal production starts. • Specialist underground drilling skills and equipment needed.
Post-drainage from underlying or overlying galleries	A roadway is driven above or below the worked seam prior to mining. The heading is then stopped off and connected to the firedamp drainage system via a pipe through the stopping. The area of influence of the drainage heading can be increased by drilling fans of boreholes from it prior to sealing.	<ul style="list-style-type: none"> • Can be complemented by cross-measures drilling from the gallery. • Potentially higher-gas capture efficiency than with cross-measures boreholes drilled from the mined horizon. • Gas drainage activities separate from coal production activities. • To reduce costs existing roadways or old workings above, or below, the proposed coal production district can sometimes be used. • Moderately high-purity gas can generally be obtained. 	<ul style="list-style-type: none"> • Costly to drive access from the worked seam to the gallery level. • Fire risk in spontaneous combustion-prone coal seams from ventilation leakages. • Costly unless driven in a reasonably thick coal seam. • Inflexible to changes in mining operations. • May be ineffective where strong, competent strata are present between the drainage gallery and the longwall face.
Post-drainage using surface to in-seam directional drilling	A relatively new application of an established technology for steering boreholes from the surface into seams above a worked seam achieving a similar configuration to directional drilling from underground for post-drainage.	<ul style="list-style-type: none"> • No underground access required. • Potentially achievable by re-using surface to in-seam boreholes drilled for pre drainage. 	<ul style="list-style-type: none"> • High cost. • Re-used pre drainage boreholes could be damaged during mining. • Does not replace need for underground cross-measure boreholes near the face to achieve effective gas control.

Method	Description	Advantages	Disadvantages
Post-drainage from chambers or pipes in longwall goafs	A chamber is constructed in the goaf behind the face and connected through stoppings to the gas drainage system. Alternatively, a gas drainage pipe with an open end near the face start line is extended as the face retreats.	<ul style="list-style-type: none"> • Reduces concentrations of methane at the return end of a retreat longwall face. • Gas quantity entering the district reduced. 	<ul style="list-style-type: none"> • Tends to lead to capture and transmission of flammable gas mixtures creating an unacceptable hazard. • High capacity methane drainage needed due to the low gas purity captured which is inefficient. • Capture efficiencies are low. • Low volume of gas captured.
Post-drainage from cross-cuts into the longwall goaf (variant of the above method)	Cross-cuts are driven from a parallel road alongside the working district to intercept the goaf. The gas drainage system is connected to a pipe through a stopping constructed in the cross-cut.	<ul style="list-style-type: none"> • May reduce the need for cross-measures firedamp drainage drilling in some circumstances. • Gas drainage activities are independent of coal extraction activities. • Reduces concentrations of methane at the return end of the longwall face. 	<ul style="list-style-type: none"> • Can lead to capture and transmission of flammable gas mixtures creating an unacceptable hazard. • High capacity of methane drainage needed due to the low gas purity captured. • Capture efficiencies generally low. • Only practicable where a suitable roadway exists from which cross-cuts to the goaf can be developed. • Cost of additional cross-cut.

References

- Black, D. & Aziz, N. (2009). *Reducing Coal Mine GHG Emissions Through Effective Gas Drainage and Utilisation*. 2009 Coal Operators Conference, Australian Institute of Mining and Metallurgy, Illawarra Branch, pp. 217-224.
- CDM Executive Board. (2006). *Tool to determine project emissions from flaring gases containing methane*. Meeting 28. Bonn, Germany: Clean Development Mechanism (CDM) Executive Board.
- Coward, H.F. (1928). *Explosibility of atmospheres behind stoppings*. *Trans Inst Min Engs*, 77, pp. 94 – 115.
- Creedy, D.P. (1986). Methods for the Evaluation of Seam Gas Content From Measurements on Coal Samples. *Mining Science and Technology*, Vol. 3, pp. 141 – 160. Amsterdam: Elsevier.
- Creedy, D.P. (2001). *Effective Design and Management of Firedamp Drainage*. *UK Health and Safety Executive, Contract Research Report 326/2001*, pp. 48, 1 annex, HSE Books.
- Creedy, D.P. & Phillips, H.R. (1997, July). *Methane Layering in Bord-and-Pillar Workings*. *Safety in Mines Research Advisory Committee (SIMRAC) Final Report. Project COL 409*. Johannesburg, South Africa: Safety in Mines Research Advisory Committee.
- Creedy, D.P., Saghafi, A., & Lama, R. (1997, April). *Gas Control in Underground Coal Mines: IEA Coal Research*. International Energy Agency (IEA) CR/91, pp. 120. London: The Clean Coal Centre.
- Department of Mineral and Energy Affairs. (1994, October). *Guidelines for a Code of Practice for the Ventilating of Mechanical Miner Sections in Coal Mines in terms of Section 34(1) of the Minerals Act 1991*, Second Edition, Ref. *GME 16/2/1/20*.
- Diamond, W.P. & Levine, J.R. (1981). *Direct Method of Determination of the Gas Content of Coal: Procedures and Results. Report of Investigation 8515*. Pittsburgh, PA (U.S.): United States Department of the Interior, Bureau of Mines.
- Diamond, W.P. & Schatzel, S.J. (1998). Measuring the Gas Content of Coal: A Review. *Int. Journ. of Coal Geology* 35, pp. 311 – 331. Amsterdam: Elsevier.
- ESMAP. (2007, July). *A Strategy for Coal Bed Methane (CBM) and Coal Mine Methane (CMM) Development and Utilization in China: Formal Report 326/07*, pp. 109. Washington, D.C.: The International Bank for Reconstruction and Development (IBRD)/WORLD BANK Energy Sector Management Assistance Program (ESMAP).
- Gaskell, P. (1989). *A Study of Sub-Surface Strata Movement Associated with Longwall Mining*. PhD. Thesis. University of Nottingham.
- IEA. (2009). *World Energy Outlook*. Paris, France: International Energy Agency (IEA).
- ILO. (2006). *Code of Practice on Safety & Health in Underground Coal Mines*. International Labour Office (ILO).

- IPCC (2007). *Climate Change 2007: Synthesis Report. Contribution of Working Groups I, II and III to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change* [Core Writing Team, Pachauri, R.K and Reisinger, A. (eds.)]. Geneva, Switzerland: International Panel on Climate Change (IPCC).
- Janas, H. F. & Opahle, M. (1986). Improvement of Gas Content Determination. *Glückauf-Forschh* 47, pp. 83 – 89. Essen, Germany.
- Kissell, F. N. (2006). *Handbook for Methane Control in Mining*. Pittsburgh, PA (U.S.): Pittsburgh Research Laboratory, National Institute for Occupational Safety and Health.
- Kissell, F. N, et al. (1973). *Direct Method of Determining Methane Content of Coalbeds for Ventilation Design*. Report of Investigation RI7767. U.S. Bureau of Mines.
- Landman, G v R. (1992). *Ignition and initiation of coal mine explosions*. PhD. Thesis, University of the Witwatersrand, pp. 252.
- Methane to Markets Partnership. (2008). *Global Methane Emissions and Mitigation Opportunities*. Washington, D.C.: Methane to Markets Administrative Support Group.
- Methane to Market Partnership. (2009, September). International Coal Mine Methane Projects Database. www.methanetomarkets.org.
- MSHA (2009). *Injury experience in coal mining*, MSHA IR1341. Washington, D.C.: U.S. Department of Labor, Mine Safety & Health Administration (MSHA).
- Moreby, R. (2009). Private communications.
- SAWS (2009). China State Administration of Worker Safety.
- Shi Su, et al. (2006, January). *Development of Two Case Studies on Mine Methane Capture and Utilization in China*. Commonwealth Scientific and Industrial Research Organisation (CSIRO).
- University of Alberta. (2004). *Flare Research Project: Final Report 1996-2004*. Kostiuk, L., Johnson, M., and Thomas, G. Edmonton, Alberta, Canada: University of Alberta.
- US EPA. (2006a). *Global Anthropogenic Emissions of Non-CO₂ Greenhouse Gases: 1990-2020*. EPA-430-R-06-003. Washington, D.C. (U.S.): U.S. Environmental Protection Agency.
- US EPA. (2006b). *Global Mitigation of Non-CO₂ Greenhouse Gases*. EPA-430-R-06-005. Washington, D.C.: U.S. Environmental Protection Agency.
- von Schoenfeldt, H. (2008, January). "Advanced CMM and CBM Extraction Technologies." CBM Conference. Singapore.

Additional Resources

Boxho, J., Stassen, P., Mücke, G., Noack, K., Jeger, C., Lescher, L., Browning, E., Dunmore, R., & Morris, I. (1980). *Firedamp Drainage Handbook for the Coalmining Industry in the European Community*, p. 415. Coal Directorate of the Commission of the European Communities. Essen: Verlag Glückauf GmbH.

Brandt, J. & Kunz, E. (2008). *Gas Drainage in High Efficiency Workings in German Coal Mines*. Presentation at the 21st World Mining Congress, session “Methane Treatment,” pp. 41 – 50. Krakau.

Creedy, D.P. (1996). *Methane Prediction in Collieries. Safety in Mines Research Advisory Committee (SIMRAC) Final Report, Project COL 303*. Johannesburg, South Africa: Safety in Mines Research Advisory Committee.

ESMAP. (2008, December). *Economically, socially and environmentally sustainable coal mining sector in China: World Bank Report No. 47131*, pp. 258. Washington, D.C.: The International Bank for Reconstruction and Development (IBRD)/WORLD BANK Energy Sector Management Assistance Program (ESMAP).

Hinderfeld, G. (1985). State and Perspectives of Gas Drainage. *Bergbau 2*, pp. 7. Essen, Germany.

Kravits, S. J & Li, J, (1995, March). Innovative in-mine gas recovery techniques implemented by Resource Enterprises. In: *International Symposium-Cum-Workshop on Management Control of High Gas Emission and Outbursts*, pp. 523 – 532. Wollongong, NSW, Australia.

Lama, R.D. & Bodziony, J. (1998). Management of outburst in underground coal mines. *Int. Journ. of Coal Geology 35*, pp. 83 – 115, Amsterdam: Elsevier.

Lunarzewski, L.W. (1998). Gas Emission Prediction and Recovery in Underground Coal Mines. *Int. Journ. of Coal Geology 35*, pp. 117 – 145, Amsterdam: Elsevier.

Mine ventilation handbook, Mine Ventilation Society of South Africa.

Moore, S., Freund, P., Riemer, P., & Smith, A. (1998, June). *Abatement of Methane Emissions*. Paris, France: International Energy Agency (IEA) Greenhouse Gas R&D Programme.

Mutmansky, J. M. & Thakur, P.C. (1999). *Guidebook on Coalbed Methane Drainage for Underground Coal Mines*, pp. 46.

Noack, K. (1998). Control of gas emissions in underground coal mines. *Int. Journ. Of Coal Geology 35*, pp. 57 – 82. Amsterdam: Elsevier.

Schlotte, W. & Brandt, J. (2003). *50 Years of Coal Research – Gas Emissions, Ventilation and Climate*. *Glückauf 139*, pp. 402 – 408. Essen, Germany.

Sdunowski, R. & Brandt, J. (2007). Optimizing the Gas Drainage in High Performance Longwalls. *Glückauf 143*, pp. 528 – 534. Essen, Germany.

Skiba, J. (2009, November). Central Mining Institute of Katowice. Personal communication.

Somers, M.J. & Schultz, H.L. (2008). *Thermal Oxidation of Coal Mine Ventilation Air Methane*. 12th U.S./North American Mine Ventilation Symposium 2008, Reno, NV (U.S.): Wallace.

Thakur, P.C. (1997). Methane Drainage from Gassy Mines – A Global Review. *Proc. Of the 6th Int. Mine Vent. Congr.* pp. 415 – 422. Pittsburgh, PA (U.S.).

US EPA. (2003, July). *Assessment of the Worldwide Market Potential for Oxidizing Coal Mine Ventilation Air Methane*. EPA-430-R-03-002. Washington, D.C.: U.S. Environmental Protection Agency. www.epa.gov/cmop/resources/index.html

US EPA. (2009, July). *Coal Mine Methane Finance Guide*. EPA-400-D-09-001. Washington, D.C.: U.S. Environmental Protection Agency.

US EPA. (2009, July). *Coal Mine Methane Recovery: A Primer*. EPA-430-R-09-013. Washington, D.C.: U.S. Environmental Protection Agency.

US EPA. (2008, January). *Upgrading Drained Coal Mine Methane to Pipeline Quality: A Report on the Commercial Status of System Suppliers*. EPA-430-R-08-004. Washington, D.C.: U.S. Environmental Protection Agency.